


Field Wire Conversion Module for A-B 1771-IVN to 1756-IV32

(Cat 1492-CM1771-LD005)

Local language (French, Italian, German & Spanish) versions of this document can be downloaded by going to www.ab.com. In the left margin click on Publications Library and Literature Library. In the Search Area (right margin), Search by Catalog Number and in the Search box type in the catalog number of the conversion system component.

I. Module Description

The 1492-CM1771-LD005 conversion module provides field wire signal conversion from an A-B 1771-IVN, 10 to 30Vdc, 32 point (sourcing) input module to a 1756-IV32, 10 to 30Vdc^①, 32 point (sourcing) input module. The conversion module provides the mating connector to the 1771-IVN module swing-arm/terminal block with the attached field wires. It routes those signals via its 37-pin connector and a 1492-CONCAB^②Z pre-wired cable to compatible terminals on the 1756-IV32 (refer to Wiring Diagram on page 2 details).

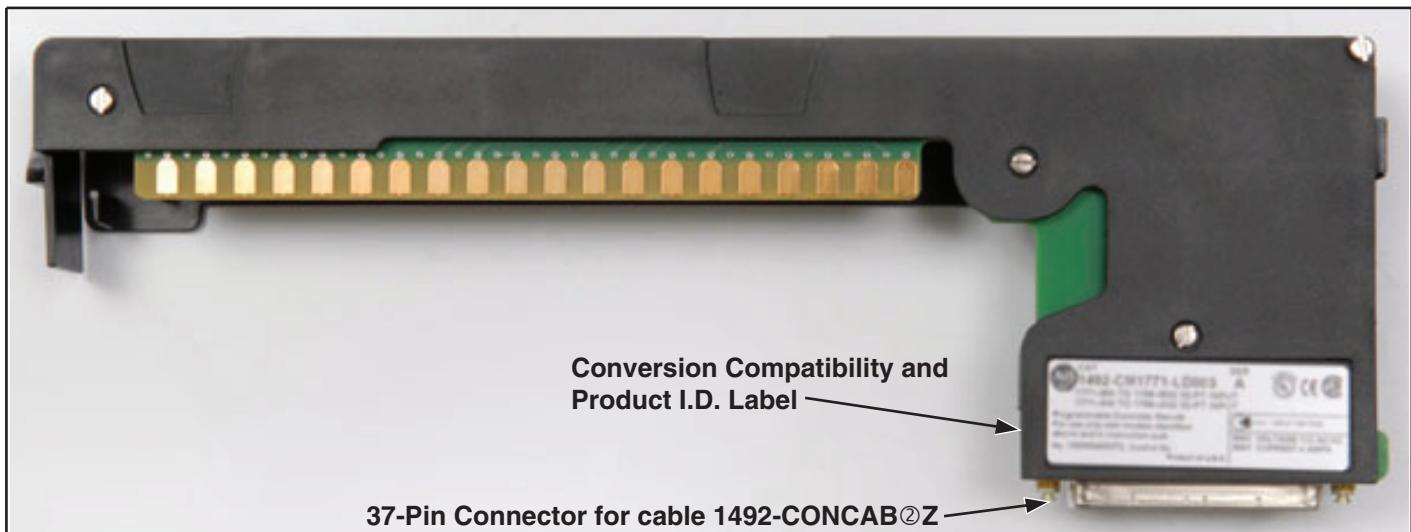

1492-CM1771-LD005 Conversion Module



WARNING

De-energize and lockout any and all power to all I/O field devices connected to the A-B 1771 I/O chassis, and the power to the 1771 I/O chassis itself. Ensure all power is de-energized and locked out to any device in the control cabinet where the conversion is to be performed. Ensure work is performed by qualified personnel.

^① Refer to conversion module Specifications Section: Maximum Operating Voltage

II. Module Installation

The 1492-CM1771-LD005 conversion module must be installed in a 1492 conversion base-plate and cover-plate assembly. The installation of the module into the assembly is explained in the Installation Manual that ships with the conversion assembly. For a list of compatible assemblies refer to Appendix A.

III. Conversion Module Compatibility Matrix

Conversion Module	Compatible 1771 Output Module	Compatible 1756 Output Module	Required 1492 Cable
1492-CM1771-LD005	1771-IVN	1756-IV32	1492-CONCAB ^② Z

^② This is cable length in meters. Available lengths are limited to 005 (0.5m) and 010 (1.0m).


IV. Conversion Module Wiring Diagram

The following diagram shows the connections from the existing 1771-IVN swing-arm, through the conversion module, 1492 cable and to the 1756-IV32 input module. The diagram can be used as an aid in possible system troubleshooting.



There are several key application considerations and system specifications (bottom of drawing) when using these components (conversion module, cable and input module). Read and understand these considerations before installation.

Conversion: 1771-IVN to 1756-IV32 with 1492-CM1771-LD005

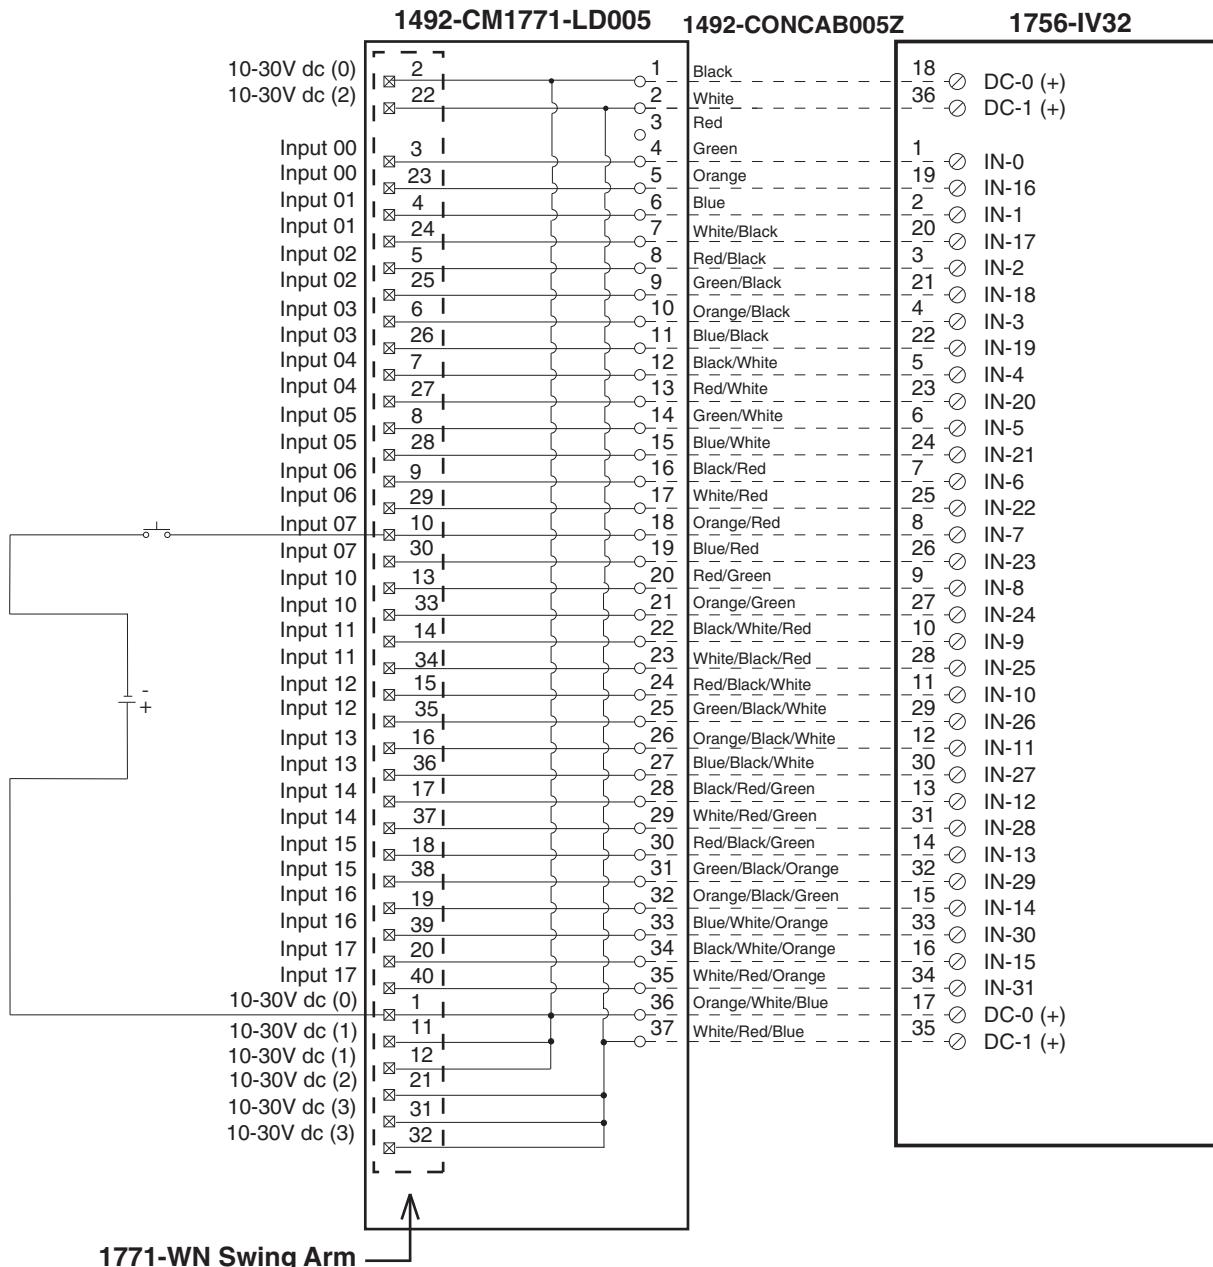

Conversion Module Installation and Application Considerations

① The input delay times for the 1771-IVN module versus 1756-IV32 module are as follows:

1771-IVN

- a) Off-to-On Delay 6ms (+/-2ms)
- b) On-to-Off Delay 6ms (+/-2ms)

1756-IV32

- 1ms (plus selectable filter)
- 2ms (plus selectable filter)

② The 1771-IVN has 4 groups (allowing 4 separate power supplies) and the 1756-IV32 has 2 groups.

This module/cable combination ties Groups 0 & 1 from the 1771-IVN to Group 0 on the 1756-IV32 and it ties Groups 2 & 3 from the 1771-IVN to Group 1 on the 1756-IV32. Field wiring modification must be made to accommodate this if multiple supplies were used. If 4 supplies were used, 2 must be removed.

③ Refer to your 1771-IVN and 1756-IV32 Installation Manual wiring schematics and diagrams for more details.

[Reference Doc: 41170-934 (Version 01)]

V. 1492-CM1771-LD005 Conversion Module Specifications

(Operating specifications are when installed in the Conversion System base / cover-plate assembly)

Specification	Value	
Dimensions	11.81 in. (height) x 4.38 in. (depth) x 1.5 in. (width) 300 mm. (height) x 111.25 mm (depth) x 38.1 mm (width)	
Approximate Shipping Weight	242.1 g (0.53 lbs) (includes carton)	
Storage Temperature	-40 to +85°C (-40 to +185°F)	
Operating Temperature	0 to 60°C (32 to 140°F)	
Operating Humidity	5 to 95% at 60°C (non-condensing)	
Shock		
Non operating	50g	
Operating	30g	
Operating Vibration	2g at 10 to 500Hz (Agrees with 1756 I/O module specifications)	
Maximum Operating Voltage	30 Vdc	
Max. Module Operating Current		
Per Point:	2 Amps	
Per Module:	4 Amps	
	NOTICE	Refer to the Wiring Diagram(s) for current limits for a specific configuration.
Agency Certifications	UL Classified: Under UL File Number E113724 CSA CE: compliant for all applicable directives	
Pollution Degree	2	
Environmental Rating	IP20	

VI. Appendix A

1771 chassis to 1756 Chassis Conversion System Selection Process

- 1) Determine the number of 1771 I/O modules used in the 1771 I/O Chassis to be converted to 1756. NOTE: In some cases two 1756 modules may be required for one 1771 module. Select the applicable 1492 conversion modules from the Digital and Analog Conversion Selection Table Matrix.
- 2) Review the Max Slots for I/O and Chassis Width data from the below table, and select a 1756 I/O Chassis which meets your conversion needs from Step 1. Ensure the information from the I/O Conversion module tables are reviewed first.
- 3) Once the 1756 Chassis is selected, select the Conversion Assembly. The Conversion Assembly has the same dimensional foot-print as the 1771 chassis and can use the same mounting hardware. The assembly consists of a base-plate to hold the conversion modules and a cover-plate to protect the modules and to mount the selected 1756 chassis. The combined depth of the conversion assembly with the 1756 chassis mounted is 10.25 inches (Controller w/key) to 10.0 inches (Controller w/o Key).

Chassis Parameter ⁽¹⁾	1771 Chassis		1756 Equivalent Chassis		1771 Chassis		1756 Equivalent Chassis		1771 Chassis	1756 Equivalent Chassis	1771 Chassis	1756 Equivalent Chassis
	-A1B w/o PS	-A1B w/PS	-A4 ⁽³⁾	-A7	-A2B w/o PS	-A2B w/PS	-A7 ⁽⁴⁾	-A10	-A3B1	-A13 ⁽⁵⁾	-A4B	-A17 ⁽⁶⁾
Max Slots for I/O	4	4	3	6	8	8	6	9	12	12	16	16
Chassis Width ⁽²⁾	9.01	12.61	10.35	14.49	14.01	17.61	14.49	19.02	19.01	23.15	24.01	29.06
Conversion Assembly	1492-MUA1B-A4-A7			1492-MUA2B-A7-A10				1492-MUA3-A10-A13			1492-MUA4-A13-A17	

Foot Notes:

- ① 1771-A3B is not listed as it is used for 19 inch wide instrumentation panels
- ② Two 1771 width dimensions are provided as some PLC-5 processors have integrated power supplies. Dimension w/PS includes -P1, -P2, etc. Notice that the width dimension of some 1756 chassis exceed the width of the 1771 chassis with or without the power supply. Cover-plate chassis mounting design allows the excess 1756 chassis width to be evenly distributed to both sides, or excess to right or left. Carefully consider this in the conversion
- ③ 1756-A4 may work in a 1771-A1B application if 4 or less I/O slots were used. Conversion cover-plate is capable to mount -A4 or -A7
- ④ 1756-A7 may work in a 1771-A2B application if 6 or less I/O slots were used. Conversion cover-plate is capable to mount -A7 or -A10
- ⑤ 1756-A10 may work in a 1771-A3B1 application if 10 or less I/O slots were used. Conversion cover-plate is capable to mount -A10 or -A13
- ⑥ 1756-A13 may work in a 1771-A4B application if 13 or less I/O slots were used. Conversion cover-plate is capable to mount -A13 or -A17