

Bulletin 852C

-20°C to +50°C (-4°F to +122°F) c  



ATTENTION

ATTENTION

ACHTUNG

ATTENZIONE

ATENÇÃO

ATENCIÓN

Disconnect from power source to prevent electrical shock before installing or servicing. Check power supply voltage and frequency.

Déconnecter l'alimentation avant toute opération d'installation ou de maintenance, afin d'éviter les décharges électriques. Contrôler la tension et la fréquence d'alimentation.

Schalten Sie den Strom während der Installation oder bei Wartungsarbeiten ab um einen elektrischen Schlag zu vermeiden. Prüfen Sie die Spannung und Frequenz der Stromquelle.

Scollegare dall'alimentazione prima dell'installazione e della messa in servizio. Controllare la tensione di alimentazione e la frequenza.

Desligar a alimentação antes de realizar qualquer intervenção. Verificar a tensão e frequência da alimentação.

Durante el proceso de instalación o mantenimiento desconectar la tensión de alimentación para evitar descargas eléctricas. Comprobar tensión y frecuencia de alimentación.



ATTENTION

ATTENTION

ACHTUNG

ATTENZIONE

ATENÇÃO

ATENCIÓN

Electrical connection is to be made by trained electrical specialists only. Wiring practices must meet applicable electrical codes.

Le branchement doit uniquement être effectué par des professionnels. Les procédures de câblage doivent répondre aux codes électriques en vigueur.

Anschluss ausschließlich durch ausgebildete Elektro-Fachkräfte. Bei der Verdrahtung sind die geltenden elektrotechnischen Sicherheitsvorschriften zu befolgen.

Il collegamento deve essere eseguito solo da elettricisti specializzati. Le procedure adottate per i cavi devono rispettare le codifiche elettriche applicabili.

A ligação deve ser feita exclusivamente por profissional elétrico especializado. A instalação da fiação deve atender aos códigos elétricos aplicáveis.

La conexión sólo debe ser realizada por electricistas debidamente formados. Las prácticas de instalación eléctrica deben seguir los códigos eléctricos.



852C-B24RGYQD5
852C-B30MCQD5

852C-B24RGYPQD5
852C-B30MCPQD5


 80dB(A)@1m
Steady tone

This product is intended for use in industrial signaling applications only


Catalog Number	Description	Input Voltage	Nominal Current (@24V)	Max. Inrush Current (@24V)
852C-B30MCQD5	7-COLORS	10-30VDC	31mA	900mA, 450µS
852C-B30MCPQD5	7-COLORS W/SOUND	10-30VDC	45mA	900mA, 450µS
852C-B24RGYQD5	3-COLORS	24VDC ±10%	15mA	No inrush
852C-B24RGYPQD5	3-COLORS W/SOUND	24VDC ±10%	32mA	600mA, 300µS

1



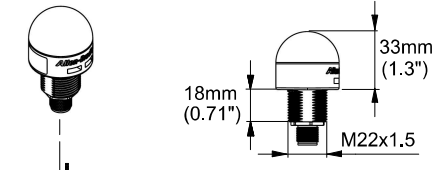


UL TYPE 4X and IP69K:
FOR USE ON A FLAT RIGID SURFACE OF INDICATED TYPE ENCLOSURE
À UTILISER SUR UNE SURFACE PLANE DE L'ENCEINTE DU TYPE INDIQUÉ
ZUR VERWENDUNG AUF EINER FLACHEN OBERFLÄCHE DES ANGEZEIGTEN GEHÄUSETYPUS
DA UTILIZZARE SU UNA SUPERFICIE PIANA DEL TIPO DI CUSTODIA INDICATO
PARA USO SOBRE LA SUPERFICIE PLANA DE UN ENVOLVENTE DEL TIPO INDICADO
PARA USO EM SUPERFÍCIE PLANA NO TIPO DE PROTEÇÃO INDICADA

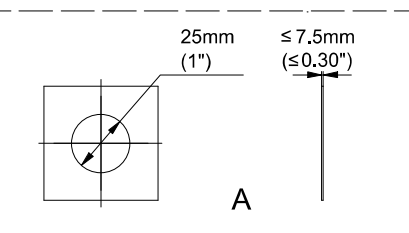

A

ACCESSORY VERTICAL BRACKET
(ORDER SEPARATELY)
(UL TYPE1/ IP65)



852C-ABVM

2



852C-B24RGYQD5

852C-B24RGYPQD5

4 Red

3 Common

5 Sound

1 Green


2 Amber




M12 Connector

(NC = Not connected)

Reverse polarity option:



Reverse polarity option:



Color	Pin				
	1	2	3	4	5*
RED	NC	NC	Common	(±) V	(±) V
GREEN	(±) V	NC		NC	
AMBER	NC	(±) V		NC	

*Pin 5 not used for 852C-B24RGYQD5

852C-B30MCQD5

852C-B30MCPQD5

M12 Connector

(NC = Not connected)


Pin

Color	1	2	3	4	5*
RED	NC	NC	Common	(±) V	(±) V
GREEN	(±) V	NC		NC	
YELLOW	(±) V	NC		(±) V	
BLUE	NC	(±) V		NC	
WHITE	(±) V	(±) V		(±) V	
MAGENTA	NC	(±) V		(±) V	
TURQUOISE	(±) V	(±) V		NC	

Reverse polarity option:




Reverse polarity option:




Pin

Color	1	2	3	4	5*
RED	NC	NC	Common	(±) V	(±) V
GREEN	(±) V	NC		NC	
YELLOW	(±) V	NC		(±) V	
BLUE	NC	(±) V		NC	
WHITE	(±) V	(±) V		(±) V	
MAGENTA	NC	(±) V		(±) V	
TURQUOISE	(±) V	(±) V		NC	

Reverse polarity option:



Reverse polarity option:



Pin 5 not used for 852C-B30MCQD5



This device has an internal fuse for overcurrent protection. The power source must be an isolated secondary source limited by maximum 0.5A and maximum 32VDC. Otherwise use Class 2 Power Supply.



3-color versions (852C-B24RGYQD5 and 852C-B24RGYPQD5) are designed for red, green or amber light. Do not energize multiple colors simultaneously.
For 3-color sound version (852C-B24RGYPQD5), sound input can be combined with one color at the same time.



To ensure genuine Allen-Bradley quality, purchase only from authorized distributors.



For additional cybersecurity guidelines please visit:
[RA System Security Design Guidelines SECURE RM-001](#)



Waste Electrical and Electronic Equipment (WEEE)



At the end of life, this equipment should be collected separately from any unsorted municipal waste.

Rockwell Automation maintains current product environmental compliance information on its website at rok.auto/pec
For Technical Support, visit rok.auto/support
Product certificates are located in the Rockwell Automation Literature Library: rok.auto/certifications

Rockwell Otomasyon Ticaret A.Ş. Kar Plaza İş Merkezi E Blok Kat:6 34752 İçerenköy, İstanbul, Tel: +90 (216) 5698400 EEE Yönetmeliğine Uygundur

Connect with us.    

rockwellautomation.com — expanding human possibility®

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1)414.382.2000, Fax: (1)414.382.4444
Europe/Middle East/Africa: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32)26630600, Fax: (32) 26630640
Asia Pacific: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852)28874788, Fax: (852) 2508 1846
United Kingdom: Rockwell Automation Ltd. Pitfield, Kiln Farm Milton Keynes, MK11 3DR, United Kingdom, Tel: (44)(1908) 838-800, Fax: (44)(1908) 261-917