



Motor Protection Circuit Breaker and Motor Circuit Protector Specifications

Bulletin Numbers 140MP, 140ME, 140MT

Topic	Page
Summary of Changes	2
Product Line Overview	3
Product Comparison	3
Bulletin 140MP Motor Protection Circuit Breakers	6
Product Overview	6
Catalog Number Explanation	7
Product Selection	8
Accessories	9
Specifications	13
Wiring Diagrams	21
Approximate Dimensions	22
Bulletin 140MT Motor Protective Switching Devices and Motor Circuit Protectors	24
Product Overview	24
Catalog Number Explanation	27
Product Selection	28
Accessories	36
Specifications	43
Approximate Dimensions	70
Bulletin 140ME Motor Protective Switching Devices with Electronic Overload Protection	82
Product Overview	82
Catalog Number Explanation	85
Product Selection	85
Accessories	87
Specifications	93
Approximate Dimensions	103
Additional Resources	109

Summary of Changes

This publication contains the following new or updated information. This list includes substantive updates only and is not intended to reflect all changes.

Topic	Page
Reinstated Coupler 140MT-C-DNC to Additional Accessories table	38

Motor Protection Circuit Breakers (MPCBs) combine short-circuit and overload protection in a single device to safeguard electric motors from potential hazards such as overload and short circuits. By integrating the functionality of a traditional circuit breaker with specialized motor protection features, MPCBs ensure the reliable and efficient operation of motors across various industrial and commercial applications.

Rockwell Automation offers a full line of MPCBs (140MP/140MT and the new 140ME devices with electronic overload protection), covering the entire voltage range from 0.1...45 A.

This publication provides a comprehensive guide to understanding, installing, and maintaining MPCBs. It covers the key principles of motor protection, the operational features of MPCBs, and the steps necessary to select the appropriate device for different motor types and usage scenarios.

Product Comparison

Electromechanical Devices

				
Bulletin No.	140MP-A	140MT-C	140MT-D	140MT-F
Frame Size	—	C-Frame	D-Frame	F-Frame
Max. Current I_e	32 A	32 A	40 A	45 A
Current Rating	0.1...32 A	0.1...32 A	0.4...40 A	9...45 A
Short-circuit protection	✓	✓	✓	✓
Standard magnetic trip	✓	✓	140MT-D9E...	140MT-F9E...
High magnetic trip	—	—	140MT-D9T...	140MT-F9T...
Magnetic-only trip (Motor Circuit Protector [MCP])	—	—	140MT-D9N...	140MT-F9N...
Definite time-delay overload release ($12 \times I_e$)	—	—	—	—
Overload protection	✓	✓	✓	✓
Trip Class	10A	10	10	10
Phase loss sensitivity	✓	✓	✓	✓
Short-circuit Indication	—	✓	✓	✓
Variable-frequency Drive (VFD) downstream compatible	—	—	140MT-D9V...	—
UL 60947-4-1 Application Ratings:				
Motor Disconnect	✓ (see ratings)	✓ (see ratings)	✓ (see ratings)	✓ (see ratings)
Group Installation	✓ (see ratings)	✓ (see ratings)	✓ (see ratings)	✓ (see ratings)
Tap Conductor Protection	—	✓ (see ratings)	✓ (see ratings)	✓ (see ratings)
Manual, Self Protected (Type E)	—	✓ (see ratings)	✓ (see ratings)	✓ (see ratings)
Type F ratings with 100-C and 100-E Contactors	—	✓ (see ratings)	✓ (see ratings)	✓ (see ratings)
Standards Compliance and Certifications:				
UL 60947-4-1, CSA C22.2, No. 60947-4-1	✓	✓	✓	✓
IEC/EN 60947-2, IEC/EN 60947-4-1	✓	✓	✓	✓
CE	✓	✓	✓	✓
ATEX	—	✓	✓ ⁽¹⁾	—
IECEX	—	✓	✓ ⁽¹⁾	✓
EAC	✓	✓	✓	—
CCC	✓	✓	✓	✓

				
Bulletin No.	140MP-A	140MT-C	140MT-D	140MT-F
KC	✓	—	—	—
CB Scheme	✓	✓	✓	✓
Accessories (Optional)				
External rotary operator	✓	✓	✓	✓
Auxiliary contacts	✓	✓	✓	✓
Trip Indication contacts	✓	✓	✓	✓
Undervoltage release	✓	✓	✓	✓
Shunt release	✓	✓	✓	✓
Insulated three-phase busbar	✓	✓	✓	✓
Connecting modules for 100-C contactors	✓	✓	✓	✓
Connecting modules for 100-E contactors	✓	✓	✓	✓
Connecting modules for 100-K contactors	✓	✓	—	—
Lockable knob	✓	✓	Standard	Standard
Anti-tamper cover	✓	✓	Standard	Standard ⁽²⁾
Product Selection	page 6	page 24		

(1) Does not apply to Cat. No. 140MT-D9N... devices.

(2) Cover blocks access to FLA setting dial.

Electronic Devices



Bulletin No.	140ME-D
Frame Size	D-Frame
Max. Current I_e	40 A
Current Rating	0.25...40 A
Short-circuit protection	✓
Standard magnetic trip	✓
High magnetic trip	—
Magnetic-only trip (Motor Circuit Protector [MCP])	—
Definite time-delay overload release ($12 \times I_e$)	✓
Overload protection	✓
Trip Class	10E and 20E
Phase loss sensitivity	✓
Short-circuit Indication	✓
Variable-frequency Drive (VFD) downstream compatible	—
UL 60947-4-1 Application Ratings:	
Motor Disconnect	✓ (see ratings)
Group Installation	✓ (see ratings)
Tap Conductor Protection	✓ (see ratings)
Manual, Self Protected (Type E)	✓ (see ratings)
Type F ratings with 100-C and 100-E Contactors	✓ (see ratings)
Standards Compliance and Certifications:	
UL 60947-4-1, CSA C22.2, No. 60947-4-1	✓
IEC/EN 60947-4-1	✓
CE	✓
ATEX	✓
IECEX	✓
EAC	—
CCC	—
KC	✓
CB Scheme	✓
Accessories (Optional)	
External rotary operator	✓
Auxiliary contacts	✓
Trip Indication contacts	✓
Undervoltage release	✓
Shunt release	✓
Insulated three-phase busbar	✓
Connecting modules for 100-C contactors	✓
Connecting modules for 100-E contactors	✓
Connecting modules for 100-K contactors	—
Lockable knob	✓
Anti-tamper cover	✓ (1)
Product Selection	page 85

(1) Cover blocks access to FLA setting and trip class selection dials.

Product Overview

Bulletin 140MP Motor Protection Circuit Breakers (MPCBs) or Motor Protective Switching Devices (MPSDs) are UL Listed as Manual Motor Controllers (with approvals for Suitable as Motor Disconnect and Suitable for use in Group Installation).

Group motor installations eliminate the need for individual branch short circuit protective devices for each motor circuit, reducing panel space, installation & wiring time, and costs. There is only one Branch Circuit Protective Device (BCPD) for the "Group".



According to UL 60947-4-1, CSA C22.2 No.60947-4-1, these devices may provide the following control and protection functions.

- Disconnect for Motor Branch Circuit
- Manual Switching (Motor control means)
- Overload Protection (Thermal Protection)

These devices meet requirement of Motor Protective Switching Devices (MPSD) according to IEC 60947-4-1 and Circuit Breaker according to IEC 60947-2 standard for application outside of North America. These devices provide the following functions.

- Disconnect for Motor Branch Circuit
- Short-circuit Protection (Magnetic Protection)
- Overload Protection (Thermal Protection)
- Manual Switching (Motor control means)

140MP devices provide Trip Class 10A overload protection and phase loss sensitivity protection. These are suitable for single- and three-phase application.

Group Installation with MPCBs


There is only one BCPD for the "Group".

Group installation has been successfully used for many years in the U.S. and Canada. It allows "two or motors or one or more motors and other loads to be connected to the same branch-circuit..." The most restrictive part of the conditions specified for Group Installation is the requirement for the protection of the conductors for each motor circuit.

[Figure 1](#) shows an example that illustrates installations involving multiple motors with a single BCPD protecting the entire "Group".

Bulletin 140MP MPCBs are UL/CSA Listed for Group Installation: conductors from the BCPD to each motor must be a minimum of 1/3 the ampacity of the Branch Circuit conductors.

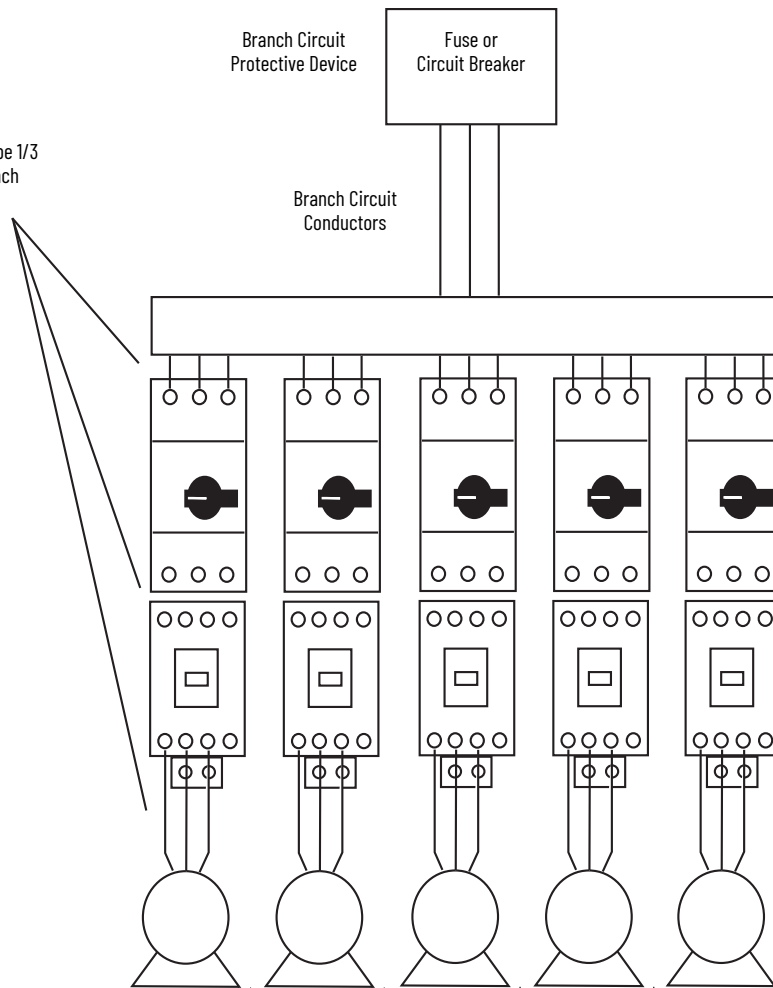Group Installation
Single motor taps must be 1/3 the ampacity of the branch circuit conductors



140MP	-	A	3	E	-	B10
a		b	c	d		e

e	
Current Range	
Code	Description
A	0.10 (example: A16 = 0.16 A)
B	1.0 (example: B16 = 1.6 A)
C	10 (example: C16 = 16 A)

Product Selection

Table 1 - Bulletin 140MP MPCB Selection Using Current and Hp/kW Ratings

Rated Operational Current (I_e) [A]	Motor Current Adjustment Range [A]	Nominal Magnetic Trip Current [A]	Max. Short Circuit Current [kA]		Max. 3-phase Hp Ratings ⁽¹⁾				Max. kW, 3-Phase – AC-3 ⁽¹⁾				Cat. No.
			400V	480V	200V	230V	460V	575V	230V	400/415V	500V	690V	
			(I_{cu})	(group motor)									
0.16	0.10...0.16	2	100	30	—	—	—	—	—	0.02	0.06	0.06	140MP-A3E-A16
0.25	0.16...0.25	3.1	100	30	—	—	—	—	—	0.04	0.09	0.09	140MP-A3E-A25
0.4	0.25...0.40	5	100	30	—	—	—	0.25	0.06	0.09	0.12	0.18	140MP-A3E-A40
0.63	0.40...0.63	7.9	100	30	—	—	0.25	0.33	0.09	0.18	0.18	0.25	140MP-A3E-A63
1	0.63...1.0	12.5	100	30	—	—	0.5	0.75	0.18	0.25	0.37	0.55	140MP-A3E-B10
1.6	1.0...1.6	20	100	30	0.25	0.33	1	1	0.25	0.55	0.75	1.1	140MP-A3E-B16
2.5	1.6...2.5	31.3	75	30	0.5	0.75	1.5	2	0.37	0.75	1.1	1.8	140MP-A3E-B25
4	2.5...4.0	50	75	18	1	0.75	3	3	0.75	1.5	2.2	3	140MP-A3E-B40
6.3	4.0...6.3	78.8	75	18	1.5	2	5	5	1.5	2.2	3	4	140MP-A3E-B63
10	6.3...10	150	75	18	3	3	7.5	10	2.2	4	6.3	7.5	140MP-A3E-C10
12	8.0...12	180	50	18	3	3	7.5	10	3	5.5	6.3	7.5	140MP-A3E-C12
16	10...16	240	15	18	5	5	10	15	4	7.5	10	13	140MP-A3E-C16
20	16...20	300	15	18	5	7.5	15	20	5.5	10	11	17	140MP-A3E-C20
25	20...25	375	15	18	7.5	7.5	20	20	5.5	11	15	22	140MP-A3E-C25
32	25...32	480	15	18	7.5	10	25	30	7.5	15	20	25	140MP-A3E-C32

(1) Hp/kW ratings shown are for reference. The final selection of the MPCB/MPSD depends on the actual motor full load current.

Table 2 - Bulletin 140MP MPCB Selection Using Interrupting Rating/Breaking Capacity

Breaking Capacity, IEC 60947-2														Cat. No.	
230V AC			400V AC			440V AC			500V AC			690V AC			
I_{cs} [kA]	I_{cu} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cs} [kA]	I_{cu} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cs} [kA]	I_{cu} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cs} [kA]	I_{cu} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cs} [kA]	I_{cu} [kA]		Back-up Fuse Rating ⁽¹⁾ [A]
50	100	— ⁽²⁾	50	100	— ⁽²⁾	30	100	— ⁽²⁾	30	100	— ⁽²⁾	30	100	— ⁽²⁾	140MP-A3E-A16
50	100		50	100		30	100		30	100		30	100		140MP-A3E-A25
50	100		50	100		30	100		30	100		30	100		140MP-A3E-A40
50	100		50	100		30	100		30	100		30	100		140MP-A3E-A63
50	100		50	100		30	100		30	100		30	100		140MP-A3E-B10
50	100		50	100		30	100		30	100		30	100		140MP-A3E-B16
50	75		50	75		10	30	25 ⁽³⁾	10	20	25 ⁽³⁾	5	10	25 ⁽³⁾	140MP-A3E-B25
50	75		50	75		6	18	25 ⁽³⁾	6	15	25 ⁽³⁾	2	3	25 ⁽³⁾	140MP-A3E-B40
50	50	80 ⁽³⁾	50	50	80 ⁽³⁾	6	18	63 ⁽³⁾	6	10	63 ⁽³⁾	2	3	40 ⁽³⁾	140MP-A3E-B63
50	50		50	50		6	18	63 ⁽³⁾	6	10	63 ⁽³⁾	2	3	50 ⁽³⁾	140MP-A3E-C10
25	50		25	50		6	15	63 ⁽³⁾	6	10	63 ⁽³⁾	2	3	50 ⁽³⁾	140MP-A3E-C12
15	15		15	15		4	6	63 ⁽³⁾	4	6	63 ⁽³⁾	2	3	63 ⁽³⁾	140MP-A3E-C16
10	15	125 ⁽³⁾	10	15	125 ⁽³⁾	3	6	125 ⁽³⁾	3	6	125 ⁽³⁾	2	3	80 ⁽³⁾	140MP-A3E-C20
10	15	125 ⁽³⁾	10	15	125 ⁽³⁾	3	6	125 ⁽³⁾	3	6	125 ⁽³⁾	2	3	100 ⁽³⁾	140MP-A3E-C25
10	15	125 ⁽³⁾	10	15	125 ⁽³⁾	3	6	125 ⁽³⁾	3	6	125 ⁽³⁾	2	3	100 ⁽³⁾	140MP-A3E-C32

(1) Back-up fuses are type gG, aM.

(2) No Back-up fuse required if $I_{cc} < I_{cs}$.

(3) Rated back-up fuse for short-circuit up to 50 kA.

Accessories

Table 3 - Auxiliary Contacts








Description	Auxiliary Contacts		Connection Diagram	Pkg. Qty.	Cat. No.	
	N.O	N.C				
	Front-mounted Auxiliary Contact - No additional space required 1 and 2-pole	1	1		10	140MP-A-AFA11
		1	0			140MP-A-AFA10
		0	1			140MP-A-AFA01
		2	0			140MP-A-AFA20
	Right-side-mounted Auxiliary Contact 2-pole - Adds 9 mm (0.35 in.) to the width of the Manual Motor Starter - Use compact bus bars with 54 mm (2.13 in.) spacing	1	1		2	140MP-A-ASA11
		2	0			140MP-A-ASA20
		0	2			140MP-A-ASA02
		Lead Contacts				140MP-A-ASA20L
		2	0			

Table 4 - Trip Contacts




Description	Auxiliary Contacts		Connection Diagram	Pkg. Qty.	Cat. No.
	N.O.	N.C.			
 Right-side-mounted Trip Signaling Contact 2-pole - Adds 9 mm (0.35 in.) to the width of the Manual Motor Starter - Use compact bus bars with 54 mm (2.13 in.) spacing	1	1		2	140MP-A-ASAR11
	2	0			140MP-A-ASAR20
	0	2			140MP-A-ASAR02

Table 5 - Undervoltage and Shunt Trip Units



Description		Trip Rating	Connection Diagram	Pkg. Qty.	Cat. No.
	Undervoltage Trip Release - Left-side mounted - Adds 18 mm (0.71 in.) to the width of the Manual Motor Starter	20V, 50 Hz/ 24V, 60 Hz		1	140MP-A-UXJ
		24V, 50 Hz			140MP-A-UXK
		48V, 50 Hz			140MP-A-UXY
		60V, 50 Hz			140MP-A-UXYA
		110V, 50 Hz/ 120V, 60 Hz			140MP-A-UXC
		208V, 60 Hz			140MP-A-UXH
		230V, 50 Hz/ 240V, 60 Hz			140MP-A-UXF
		400V, 50 Hz			140MP-A-UXN
		415V, 50 Hz/ 480V, 60 Hz			140MP-A-UXB
		575V, 60 Hz			140MP-A-UXM
	Shunt Trip Release - Left-side mounted - Adds 18 mm (0.71 in.) to the width of the Manual Motor Starter	20...24V, 50/60 Hz		1	140MP-A-SNKJ
		110V, 50/60 Hz			140MP-A-SND
		200...240V, 50/60 Hz			140MP-A-SNAF
		350...415V, 50/60 Hz			140MP-A-SNN

Table 6 - Bus Bars

Description			Terminal Links	For Use With	Pkg. Qty.	Cat. No.
	Compact Bus Bars - UL: 600V, 60 A - IEC: 690V, 65 A	45 mm (1.77 in.) spacing - For use with front-mounted auxiliary contact	2 x 3 connections	140MP	10	140MP-A-W452
			3 x 3 connections			140MP-A-W453
			4 x 3 connections			140MP-A-W454
			5 x 3 connections			140MP-A-W455
		54 mm (2.13 in.) spacing - For use with side-mounted auxiliary contact	2 x 3 connections	140MP	10	140MP-A-W542
			3 x 3 connections			140MP-A-W543
			4 x 3 connections			140MP-A-W544
			5 x 3 connections			140MP-A-W545
		63 mm (2.5 in.) spacing - For use with side-mounted auxiliary contact	2 x 3 connections	140MP	10	140MP-A-W632
			3 x 3 connections			140MP-A-W633
			4 x 3 connections			140MP-A-W634
			5 x 3 connections			140MP-A-W635
	Bus Bar Feeder Terminal (Flat) - Supply of compact bus bars - Increases terminal capacity			140MP-A-W	10	140MP-A-WTN
	Bus Bar Feeder Terminal (High) - Supply of compact bus bars - Increases terminal capacity			140MP-A-W	10	140MP-A-WTNH

Table 7 - Connecting Modules

Description		For Use With	Cat. No.
	ECO Connecting Module—12 A (IEC), 11 A (UL) • For DOL Starters • ECO Starters mount on single DIN Rail (140MP on DIN rail) • Electrical and mechanical interconnection of 140MP and 100-K Contactors	140MP-A to 100-K	140MP-A-PEK12
	ECO Connecting Module—25 A (IEC), 24 A (UL) • For DOL Starters • ECO Starters mount on single DIN Rail (140MP on DIN rail) • Electrical and mechanical interconnection of 140MP and 100-C Contactors	140MP-A to 100-C09...C23	140MP-A-PEC23
	ECO Connecting module ⁽¹⁾ • For DOL starters • ECO Starters mount on single DIN Rail (140MP on DIN Rail) • Electrical and mechanical interconnection of 140MP and 100-E contactors • Package quantity: 10	16 A	140MP-A-A16...C25 to 100(S)-E09...16
			140MP-A-A16...C16 to 100(S)-E26...38
		38 A	140MP-A-A3E-C20...C32 to 100(S)-E26...38

(1) Not suitable for 100(S)-E09...380J or 300(S)-T0...800J contactors.

Table 8 - Additional Accessories

Description		For Use With	Pkg. Qty.	Cat. No.
	Blank Space Cover • For covering unused terminal links • Must be ordered in multiples of 10 (10pieces/package)	140MP-A-W	50	140MP-A-WSN
	Screw Adapter • For screw arrangement of a motor protection circuit breaker • Hat (DIN) Rail 35 x 7.5 mm (1.4 x 0.3 in.) • 44 mm (1.7 in.) length	140MP	10	140MP-A-N45
	Enclosure • Up to three padlocks in OFF position • Protection Class: IP65; UL/CSA Type 12	Red/yellow handle	1	140MP-A-ENY65
		Black handle		140MP-A-ENN65
	Door Mounting Kit • Up to three padlocks in OFF position • Protection Class: IP65; UL/CSA Type 12	Red/yellow handle	1	140MP-A-DMY65
		Black handle		140MP-A-DMN65
	Door Coupling Handle • Up to three padlocks in OFF position • Defeatable • Type 1/3R/12 • IP64	Red/Yellow	1	140MP-A-DCY65
		Black		140MP-A-DC65
	Coupler • Coded—Positioning of ON indication dependent from mounting orientation of the 140MP	Driver with screw	1	140MP-A-DNC
	• Uncoded—Positioning of ON indication independent from mounting orientation of the 140MP	Driver without coding, with screw		140MP-A-DNUC

Table 8 - Additional Accessories

Description		For Use With	Pkg. Qty.	Cat. No.
	Shaft Alignment Ring - Supports the long shafts for alignment to the handle inlet. It makes closing panel doors more easy - Use for shafts	140MP	1	140MP-A-SAR
	Extension Shaft	105 mm (4.13 in.)	10	140MP-A-DS
		180 mm (7.1 in.)		140MP-A-DSM
	Extension Shaft Support - Supports the shaft in the extension of handle (140MP-A-DC) - Required for shaft lengths >130 mm (5.1 in.) - Snaps on the right side of the MPCB - Width: 9 mm (0.35 in.) - For use with screw-mounted or hat rail mounted devices.	140MP	1	140MP-A-SHS
	Lockable Handle Accessory For locking 140MP devices in the OFF position	140MP	10	140MP-A-KN1

Specifications

MPCB Specifications

Table 9 - General Ratings

Attribute		Value
Standards compliance	IEC	IEC/EN 60947-2, IEC/EN 60947-4-1, IEC/EN 60947-1
	cULus	UL 60947-1, UL 60947-4-1, CSA C22.2, No. 60947-4-1
Certifications	Global	RINA (Marine)
	Regional	CCC, KC, EAC, CE, IEC, cULus, CB Scheme
Rated operating voltage U_e		690V AC
Maximum operating voltage (UL)		600V
Rated Frequency		50/60 Hz
Trip Class		10A
Number of operations	Mechanical	100,000 Cycles
	Electrical	100,000 Cycles (0.1...16 A); 50,000 Cycles (20...32 A)
Rated impulse withstand voltage U_{imp}		6 kV
Rated insulation voltage U_i		690V
Pollution Degree		3
Phase loss sensitivity		Yes
Disconnect function per IEC/EN 60947-2		Yes
Resistance to shock per IEC 60068-2-27		25 G/11 ms
Resistance to vibrations per IEC 60068-2-6		5 G / 3 ... 150 Hz
Mounting		DIN Rail (EN 60715)
Group mounting (side by side)		up to 40 °C (104 °F)
Minimum distance to other units same type	Horizontal	0 mm (0 in.)
	Vertical	150 mm (5.9 in.)
Minimum distance to electrical conductive board	Horizontal, up to 400V	0 mm (0 in.)
	Horizontal, up to 690V	> 1.5 mm (0.06 in.)
	Vertical	75 mm (2.95 in.)
Degree of Protection	Housing	IP20
	Main Terminals	IP10
Short-circuit ratings	@230V, 400V, 440V, 500V, and 690V	See Table 2
	@480V and 600V—for motor disconnect	See Table 14
	@480V and 600V—for group motor installation	
Utilization Category	IEC 60947-2 (Circuit breaker)	A
	IEC 60947-4-1 (Motor Starter)	AC-3

Table 10 - Power Loss

Power Loss		Rated Operating Current [A]				
		0.16...1.6	2.5...6.3	10...12	16...25	32
Power Loss in all 3 Poles up to:	[W]	5.1	5.4	7.2	8.4	9.3

Table 11 - Environmental Ratings


Attribute		Value
Operating Ambient air temperature	Open—compensated	-25 ... +55 °C (-13...+131 °F) ⁽¹⁾
	Open	-25 ... +70 °C (-13...+158 °F) ⁽¹⁾
	Enclosed	0 ... +40 °C (32...104 °F)
Storage Ambient air temperature		-50 ... +80 °C (-58...+176 °F)
Maximum operating altitude permissible		2000 m (6561 ft)

(1) With derating. See [Table 12](#).

Table 12 - Ambient Temperature Derating

Cat. No.	Ambient Temperature Derating [A]		
	40 °C (104 °F)	55 °C (131 °F)	70 °C (158 °F)
140MP-A3E-C10	10	10	8
140MP-A3E-C12	12	12	10
140MP-A3E-C16	16	16	12
140MP-A3E-C20	20	20	18
140MP-A3E-C25	25	25	23
140MP-A3E-C32	32	32	29

Table 13 - MPCB Connecting Characteristics

Connection		No. of Conductors	Devices Rated ≤ 16 A	Devices Rated 20...32 A
Type of terminals				
Connection Screw			M3.5/Pozidriv No. 2	M4/Pozidriv No. 2
Wiring	Solid 	1 or 2	1...4 mm ²	1...2.5 mm ²
				2.5...6 mm ²
	Flexible with ferrule 	1 or 2	0.75...2.5 mm ²	0.75...6 mm ²
	Flexible/finely stranded 	1 or 2	0.75...2.5 mm ² /No. 16...12 AWG	1.5...2.5 mm ² /No. 16...8 AWG
				2.5...6 mm ² /No. 16...8 AWG
	Stranded per UL/CSA 	1 or 2	1...4 mm ² /No. 16...12 AWG	1...2.5 mm ² /No. 16...8 AWG
Stripping length			9 mm (0.35 in.)	10 mm (0.39 in.)
Tightening torques			0.8...1.2 N•m/7...10 lb•in	2 N•m /18 lb•in

Application Ratings

[Table 14](#) lists specific application ratings for MPCBs.

Table 14 - UL/CSA Listed Application Ratings, Motor Protection Circuit Breaker Only

Cat. No.	UL 60947-4-1 – Manual Motor Controller				
	Branch Circuit Protection Max. Size per NEC/CEC [A]	Max. Short Circuit Current [kA]			
		Motor Disconnect		Group Installation	
		1480V	600V	1480V	600V
140MP-A3E-A16	175	30	5	30	5
140MP-A3E-A25					
140MP-A3E-A40					
140MP-A3E-A63					
140MP-A3E-B10					
140MP-A3E-B16					
140MP-A3E-B25					
140MP-A3E-B40					
140MP-A3E-B63					
140MP-A3E-C10					
140MP-A3E-C12	400	18	5	18	5
140MP-A3E-C16					
140MP-A3E-C20					
140MP-A3E-C25					
140MP-A3E-C32					

[Table 15](#) through [Table 20](#) lists specific application ratings for MPCBs in combination with Bulletin 100-K, 100-C, and 100-E contactors.

Type 1 Coordination—Specified 100-K contactors are suitable for motor group applications when they are used on the load side of the 140MP-A3E Manual Motor Controllers that are specified in [Table 15](#).

Table 15 - Type 1 Application Ratings, 140MP to 100-K Miniature IEC Contactors

Manual Motor Controller Cat. No.	Contactor ⁽¹⁾	SCCR		
		480V AC [kA]	600V AC [kA]	Maximum Fuse or Circuit Breaker sized per NEC [A]
140MP-A3E-A16	100-K05 100-K09 100-K12	30	5	175
140MP-A3E-A25		30	5	175
140MP-A3E-A40		30	5	175
140MP-A3E-A63		30	5	175
140MP-A3E-B10		30	5	175
140MP-A3E-B16		30	5	175
140MP-A3E-B25		30	5	175
140MP-A3E-B40		18	—	175
140MP-A3E-B63		18	—	175
140MP-A3E-C10	100-K09 100-K12	18	—	175
140MP-A3E-C12	100-K12	18	—	175
140MP-A3E-C16		18	—	175

(1) May be used with 140MP-A-PEK12 connecting module between 140MP-A3E manual motor controller and 100-K contactor.

Type 1 Coordination—Specified 100-C contactors (without R suffix) are suitable for motor group applications when they are used on the load side of the specified Manual Motor Controllers.

Table 16 - Type 1 Application Ratings, 140MP to 100-C IEC Contactors

Manual Motor Controller	Contactor ⁽¹⁾	SCCR		
		480V AC [kA]	600V AC [kA]	Maximum Fuse or Circuit Breaker sized per NEC [A]
140MP-A3E-A16	100-C09 100-C12 100-C16 100-C23	30	5	175
140MP-A3E-A25		30	5	175
140MP-A3E-A40		30	5	175
140MP-A3E-A63		30	5	175
140MP-A3E-B10		30	5	175
140MP-A3E-B16		30	5	175
140MP-A3E-B25		30	5	175
140MP-A3E-B40		18	5	175
140MP-A3E-B63		18	5	175
140MP-A3E-C10		18	5	175
140MP-A3E-C12	100-C12 100-C16 100-C23	18	5	175
140MP-A3E-C16 ⁽²⁾	100-C16, 100-C23	18	5	175
140MP-A3E-C20	100-C23 100-C30 100-C37	18	5	400
140MP-A3E-C25 ⁽³⁾	100-C23	18	—	400
140MP-A3E-C25 ⁽³⁾	100-C30, 100-C37	18	5	400
140MP-A3E-C32 ⁽⁴⁾	100-C30, 100-C37	18	5	400

(1) 140MP-A-PEC23 connection modules may be used with 100-C09...-C23 up to 24 A.

(2) Limited to 15.5 FLA maximum when used in a 365 x 235 x 140 mm (14.4 x 9.3 x 5.5 in.) (200%) or larger enclosure. Limited to 14.5 FLA maximum when used in 115 x 290 x 180 mm (4.5 x 11.4 x 7.1 in.) (150%) minimum sized enclosure.

(3) Minimum enclosure size is 170 x 670 x 235 mm (6.7 x 26.4 x 9.3 in.) (250%) at full load current. If end use current is 22.5 FLA or less, may be used in an enclosure as small as 115 x 290 x 180 mm (4.5 x 11.4 x 7.1 in.) (150%).

(4) May be used at 30.8 FLA maximum when used ambient temperature of 40 °C (104 °F) maximum. May be used up to 29 FLA when used in a 115 x 290 x 180 mm (4.5 x 11.4 x 7.1 in.) (150%) minimum size enclosure.

Table 17 - Type 2 Coordination Ratings per IEC 60947-4-1, 140MP to 100-C IEC Contactors, Standard Motor Protection

Cat. No.	Type 2 Coordination Ratings, IEC 60947-4-1	
	400/415V	
	Max. Short Circuit Current [kA]	For Use With Contactor Cat. No.
140MP-A3E-A16	50	100-C09
140MP-A3E-A25	50	100-C09
140MP-A3E-A40	50	100-C09
140MP-A3E-A63	50	100-C09
140MP-A3E-B10	50	100-C09
140MP-A3E-B16	50	100-C09
140MP-A3E-B25	50	100-C09
140MP-A3E-B40	50	100-C09
140MP-A3E-B63	50	100-C09
140MP-A3E-C10	50	100-C09
140MP-A3E-C12	25	100-C12
140MP-A3E-C16	10	100-C23
140MP-A3E-C20	10	100-C30
140MP-A3E-C25	10	100-C30
140MP-A3E-C32	10	100-C30

Table 18 - Type 2 Coordination Ratings per IEC 60947-4-1, 140MP to 100-E IEC Contactors, Standard Motor Protection

Cat. No.	Type 2 Coordination Ratings, IEC 60947-4-1	
	400V	
	Max. Short Circuit Current [kA]	Minimum Contactor Size
140MP-A3E-A16	50	100-E09
140MP-A3E-A25	50	100-E09
140MP-A3E-A40	50	100-E09
140MP-A3E-A63	50	100-E09
140MP-A3E-B10	50	100-E09
140MP-A3E-B16	50	100-E09
140MP-A3E-B25	50	100-E09
140MP-A3E-B40	50	100-E26
140MP-A3E-B63	50	100-E26
140MP-A3E-C10	50	100-E26
140MP-A3E-C12	25	100-E26
140MP-A3E-C16	16	100-E26
140MP-A3E-C20	10	100-E30
140MP-A3E-C25	10	100-E30
140MP-A3E-C32	10	100-E38

Table 19 - Type 2 Coordination Ratings per UL 60947-4-1, 140MP to 100-C IEC Contactors, Standard Motor Protection

Cat. No.	Contactor ⁽¹⁾	Type 2 Coordination Ratings, UL 60947-4-1		Max. Fuse or Circuit Breaker Size per NEC [A]
		480V	600V	
		Max. Short Circuit Current [kA]	Max. Short Circuit Current [kA]	
140MP-A3E-A16	100-C09 100-C12 100-C16 100-C23	30	5	175
140MP-A3E-A25		30	5	175
140MP-A3E-A40		30	5	175
140MP-A3E-A63		30	5	175
140MP-A3E-B10		30	5	175
140MP-A3E-B16		30	5	175
140MP-A3E-B25	100-C12 100-C16 100-C23	30	5	175
140MP-A3E-B40	100-C16 100-C23	18	5	175
140MP-A3E-B63	100-C23	18	5	175
140MP-A3E-C10	100-C30 100-C37	18	5	175
140MP-A3E-C12		18	5	175
140MP-A3E-C16 ⁽²⁾		18	5	175
140MP-A3E-C20		18	5	400
140MP-A3E-C25 ⁽³⁾		18	5	400
140MP-A3E-C32 ⁽⁴⁾		18	5	400

(1) 140MP-A-PEC23 connection modules may be used with 100-C09...-C23 up to 24 A.

(2) Limited to 15.5 FLA maximum when used in a 365 x 235 x 140 mm (14.4 x 9.3 x 5.5 in.) (200%) or larger enclosure.
Limited to 14.5 FLA maximum when used in 115 x 290 x 180 mm (4.5 x 11.4 x 7.1 in.) (150%) minimum sized enclosure.

(3) Minimum enclosure size is 170 x 670 x 235 mm (6.7 x 26.4 x 9.3 in.) (250%) at full load current.
If end use current is 22.5 FLA or less, may be used in an enclosure as small as 115 x 290 x 180 mm (4.5 x 11.4 x 7.1 in.) (150%).

(4) May be used at 30.8 FLA maximum when used ambient temperature of 40 °C (104 °F) maximum.
May be used up to 29 FLA when used in a 115 x 290 x 180 mm (4.5 x 11.4 x 7.1 in.) (150%) minimum size enclosure.

Table 20 - Type 2 Coordination Ratings per UL 60947-4-1, 140MP to 100-E IEC Contactors, Standard Motor Protection

Cat. No.	Max. Fuse or Circuit Breaker per NEC	Type 2 Coordination Ratings, UL 60947-4-1			
		480V		600V	
		Max. Short-circuit Current [kA]	Minimum Contactor Size	Max. Short-circuit Current [kA]	Minimum Contactor Size
140MP-A3E-A16	175	30	100-E09	5	100-E09
140MP-A3E-A25	175	30	100-E09	5	100-E09
140MP-A3E-A40	175	30	100-E09	5	100-E09
140MP-A3E-A63	175	30	100-E09	5	100-E09
140MP-A3E-B10	175	30	100-E09	5	100-E09
140MP-A3E-B16	175	30	100-E09	5	100-E09
140MP-A3E-B25	175	30	100-E16	5	100-E16
140MP-A3E-B40	175	18	100-E26	5	100-E16
140MP-A3E-B63	175	18	100-E26	5	100-E26
140MP-A3E-C10	175	18	100-E26	5	100-E30
140MP-A3E-C12	175	18	100-E26	5	100-E30
140MP-A3E-C16	175	18	100-E26	5	100-E40
140MP-A3E-C20	400	18	100-E26	5	100-E40
140MP-A3E-C25	400	18	100-E30	5	100-E40
140MP-A3E-C32	400	18	100-E38	5	100-E40

Accessory Specifications

Table 21 - Auxiliary Contact, Signaling Contact, and Short-circuit Signaling Contact Specifications

Attribute		Side-mounted Auxiliary, Signaling, and Short-circuit Signaling Contacts	Front-mounted Auxiliary Contacts
Standards compliance	IEC	IEC/EN 60947-1, IEC/EN 60947-5-1	IEC/EN 60947-1, IEC/EN 60947-5-1
	UL/cULus	UL 60947-4-1, CAN/CSA22.2 No. 60947-4-1	UL 60947-4-1, CAN/CSA22.2 No. 60947-4-1
Rated operating voltage U_e		690V AC/600V DC	250V AC/250V DC
Conventional free-air thermal current I_{th}		6 A	5 A
Rated Frequency		50/60 Hz	50/60 Hz
Rated impulse withstand voltage U_{imp}		6 kV	6 kV
Rated insulation voltage U_i		690V AC	250V AC
Pollution Degree		3	3
Ambient air temperature	Operation	-25 ... +60 °C (-13...+140 °F)	-25 ... +60 °C (-13...+140 °F)
	Storage	-50 ... +80 °C (-58...+176 °F)	-50 ... +80 °C (-58...+176 °F)
Resistance to shock per IEC 60068-2-27		25 G/11 ms	25 G/11 ms
Resistance to vibrations per IEC 60068-2-6		5 G/3 ... 150 Hz	5 G/3 ... 150 Hz
Rated operational current I_e AC-15 per IEC/EN 60947-5-1 for utilization category	24V, 120V	6 A	3 A
	240V	4 A	1.5 A
	400V	3 A	—
	440V, 690V	1 A	—
Rated operational current I_e DC-13 per IEC/EN 60947-5-1 for utilization category	24V	2 A	1 A
	125V	0.55 A	0.27 A
	250V	0.27 A	0.11 A
	440V, 600V	0.15 A (0.1 A for Cat. No. 140MP-A-ASA20L)	—
Minimum switching capacity		17V DC/5 mA	17V DC/5 mA
Short-circuit protective device (N.O, N.C)		10 A Type gG	10 A Type gG
Duty time		100%	100%
Mounting		Right side	Front
Number of operations	Mechanical	50,000 cycles	50,000 cycles
	Electrical		
Contact utilization characteristics according to UL/CSA			
Rated operating voltage U_e per UL/CSA		600V AC/600V DC	250V AC/250V DC
Pilot duty		B600, Q600	B300, R300
AC thermal rated current		5 A	5 A
AC maximum volt-ampere	making	3600	3600 VA
	breaking	360	360 VA
DC thermal rated current		2.5 A	2.5 A
DC maximum volt-ampere	making	69 VA	28 VA
	breaking		
Connecting characteristics		Table 24	Table 24

Table 22 - Undervoltage Release Specifications

Attribute		Value
Standards compliance	IEC	IEC/EN 60947-1, IEC/EN 60947-5-1
	UL/cULus	UL 60947-4-1, CAN/CSA22.2 No. 60947-4-1
Rated control supply voltage		See Table 5
Rated frequency		
Operating voltage	Tripping	0.35 ... 0.7 x U _s
	Coil	0.85 ... 1.1 x U _s
Rated impulse withstand voltage U _{imp}		6 kV
Rated insulation voltage U _i		690V
Pollution degree		3
Ambient air temperature	Operation	-25 ... +60 °C (-13...+140 °F)
	Storage	-50 ... +80 °C (-58...+176 °F)
Resistance to shock per IEC 60068-2-27		25 G/11 ms
Resistance to vibrations per IEC 60068-2-6		5 G/3 ... 150 Hz
Mounting		left side of MPCB

Table 23 - Shunt Trip Specifications

Attribute		Value
Standards compliance	IEC	IEC/EN 60947-1, IEC/EN 60947-5-1
	UL/cULus	UL 60947-4-1, CAN/CSA22.2 No. 60947-4-1
Rated control supply voltage		See Table 5
Rated frequency		
Operating voltage	Tripping	0.7 ... 1.1 x U _s
Rated impulse withstand voltage U _{imp}		6 kV
Rated insulation voltage U _i		690V
Pollution degree		3
Ambient air temperature	Operation	-25 ... +60 °C (-13...+140 °F)
	Storage	-50 ... +80 °C (-58...+176 °F)
Resistance to shock per IEC 60068-2-27		15 G/11ms
Resistance to vibrations per IEC 60068-2-6		5 G/3 ... 150 Hz
Mounting		left side of MPCB


Table 24 - Auxiliary Contact Connecting Characteristics

Connection			No. of Conductors	Side Mounted	Front Mounted
Wiring	Solid		1 or 2	1...1.5 mm ²	1...2.5 mm ²
	Flexible with ferrule		1 or 2	0.75...1.5 mm ²	
	Flexible		1 or 2	0.75...1.5 mm ²	
	Stranded per UL/CSA		1 or 2	No. 16...14 AWG	
	Stripping length			8 mm (0.31 in.)	
Tightening torques				0.8...1.2 N•m/7 lb•in	
Recommended screwdriver				Pozidriv No. 2	

Table 25 - Feeder Terminal and Bus Bar Current Ratings

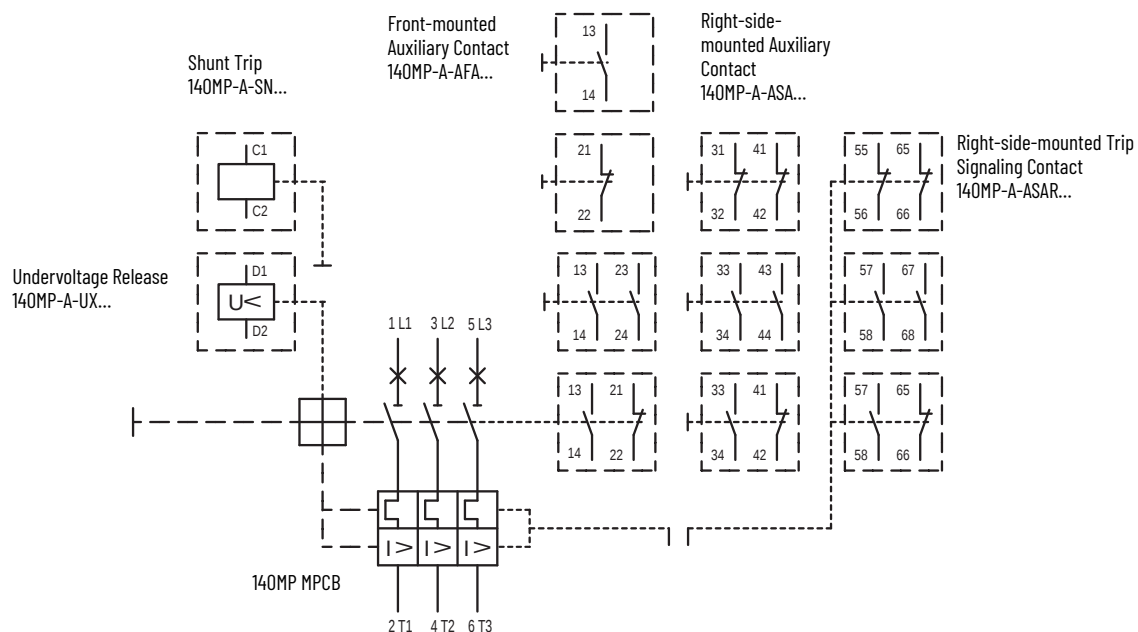
Attribute	140MP-A-W45..., -W54..., -W63...	140MP-A-WT...
Rated operational voltage U_e	690V	
Rated operational voltage U_e per UL/CSA	600V AC	
Rated operational current I_e	65 A	
Rated operational current I_e per UL/CSA	60 A	65 A
Suitable for enclosure size (UL)	200% of size of 140MP-A with bus bars	
Rated frequency	50/60 Hz	
Rated impulse withstand voltage U_{imp}	6 kV	
Rated insulation voltage U_i	690V AC	

Table 26 - Main Circuit Connecting Characteristics

Connection			No. of Conductors	Value
Wiring	Solid		1	6...25 mm ²
	Flexible with ferrule		1	6...16 mm ²
	Flexible with insulated ferrule		1	6...16 mm ²
	Flexible		1	6...16 mm ²
	Stranded per UL/CSA		1	No. 10...4 AWG
	Stripping length			10 mm (0.39 in.)
Tightening torques				2.5 N•m/22 lb•in
Recommended screwdriver				Pozidriv No. 2

Wiring Diagrams

Figure 2 illustrates basic wiring for the 140MP MPCB and accessories.

Figure 2 - 140MP Wiring Example

Approximate Dimensions

Dimensions are in millimeters (inches) and are not intended for manufacturing purposes.

Figure 3 - Mounting Position

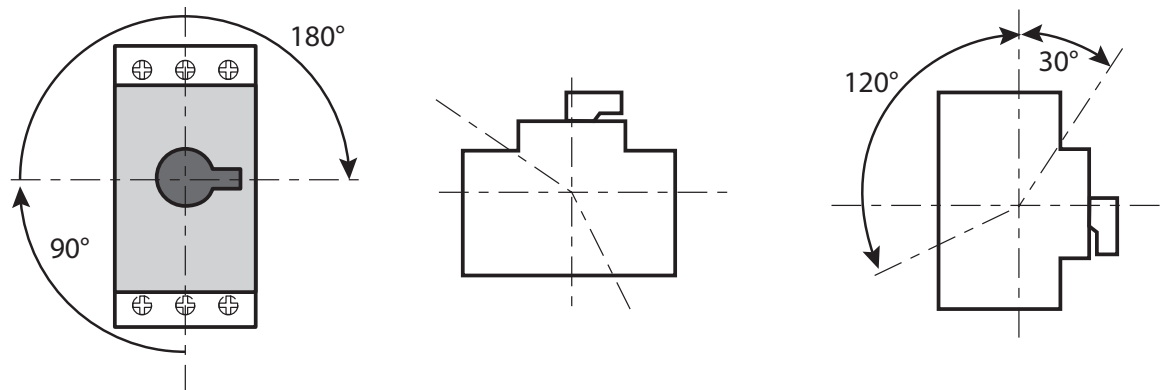


Figure 4 - Cat. No. 140MP-A3E..., 140MP-A-N45 ≤16 A

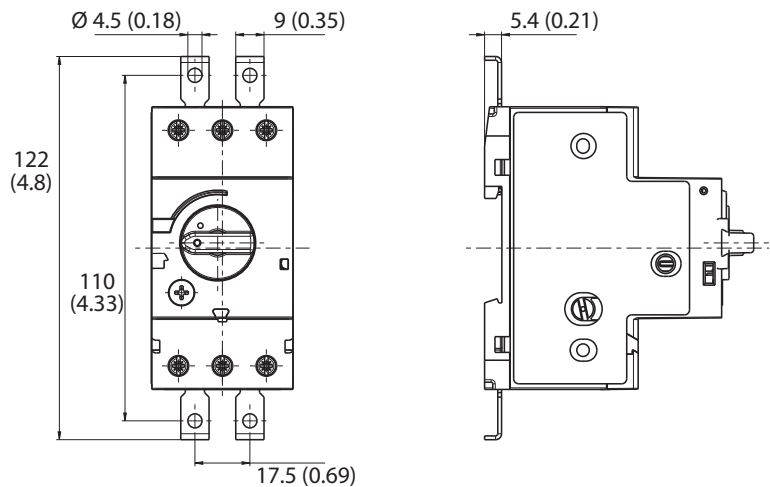


Figure 5 - Cat. No. 140MP-A3E..., 140MP-A-N45 ≥20 A

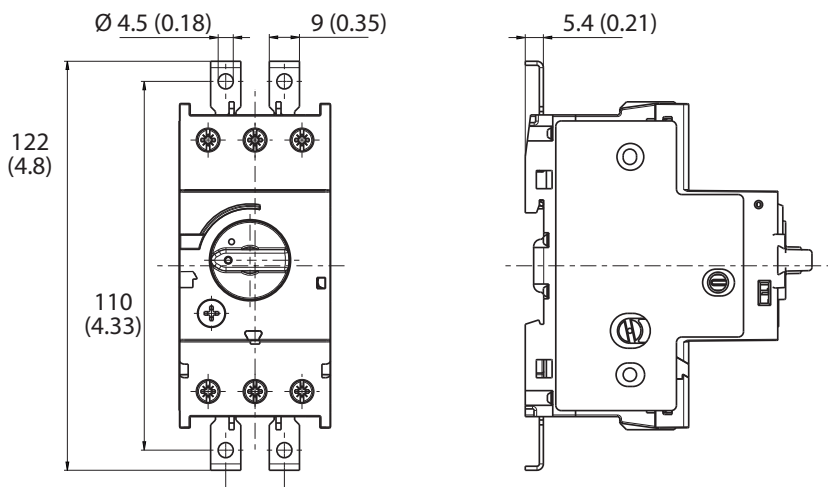


Figure 6 - Cat. No. 140MP-A3E-C16 with Accessories


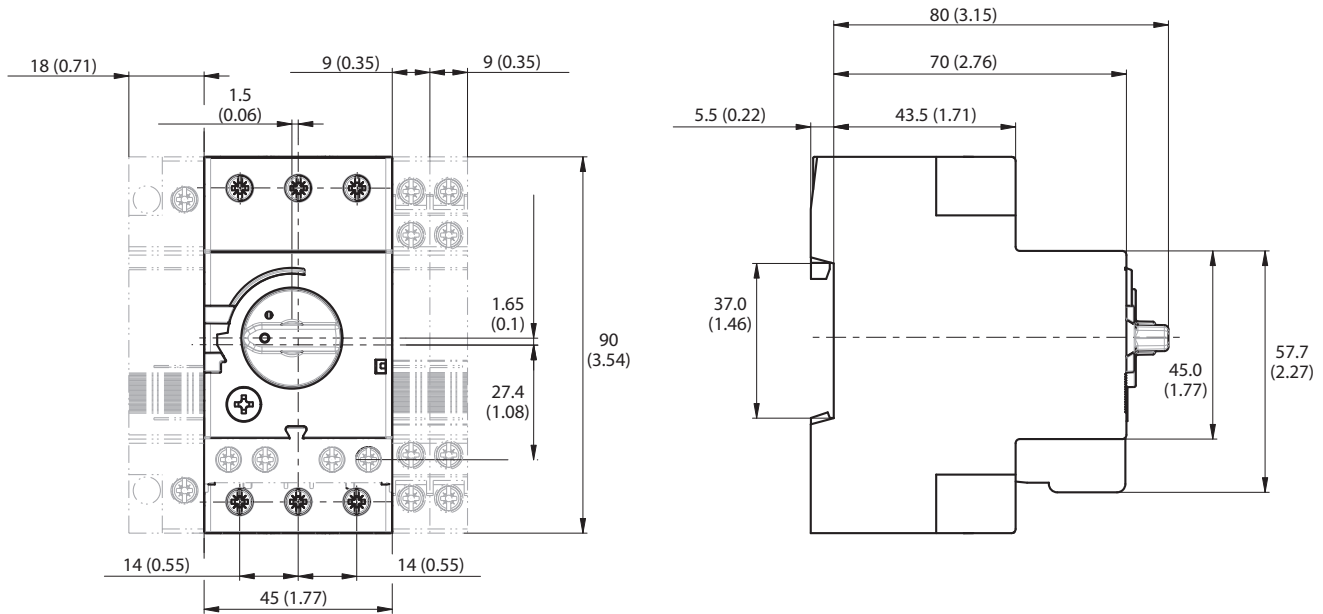


Figure 7 - Cat. No. 140MP-A3E-C32 with Accessories

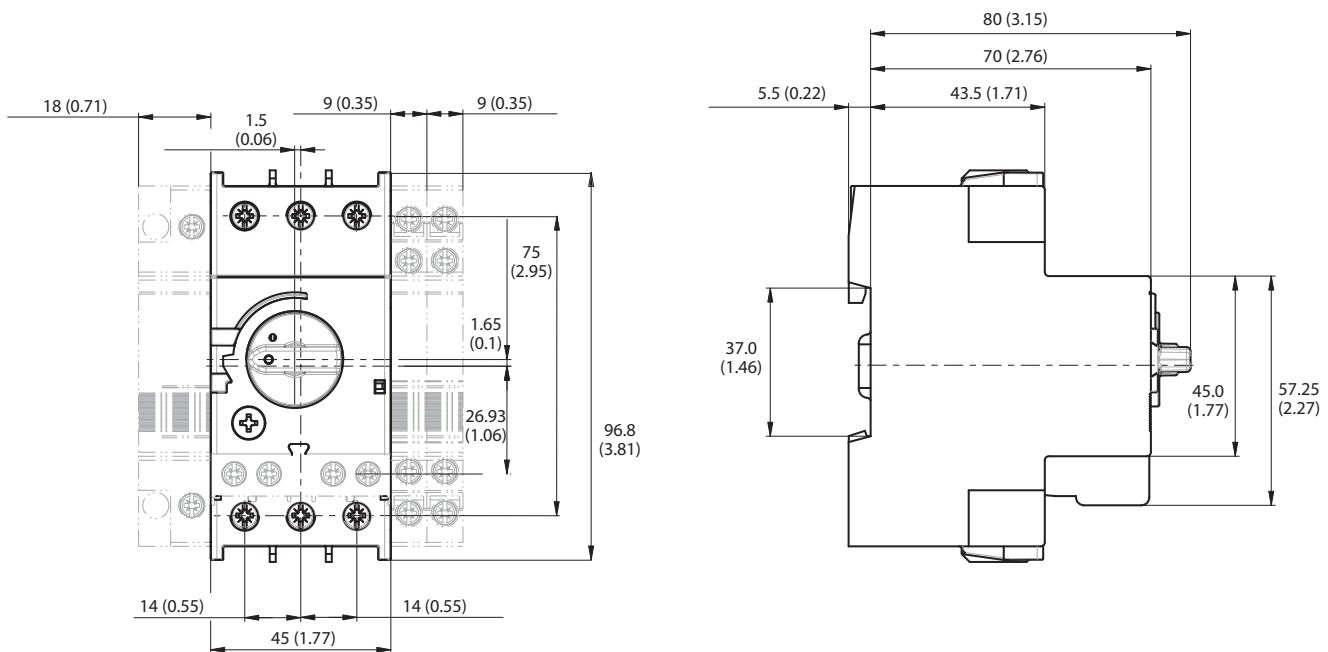

Bulletin 140MT Motor Protective Switching Devices and Motor Circuit Protectors

Product Overview

Bulletin 140MT Motor Protection Circuit Breakers (MPCBs) or Motor Protective Switching Devices (MPSDs) are UL Listed as Manual, Self-Protected Combination Motor Controllers (Type E) and Manual Motor Controllers (with approvals for Suitable as Motor Disconnect and Suitable for use in Group Installation).

When UL/CSA Listed as Manual, Self-Protected Combination Motor Controllers, the 140MT MPCBs provide all necessary NEC/CEC requirements for the protection and control of individual motor branch circuits without additional branch circuit protective devices.

According to UL 60947-4-1, CSA C22.2 No.60947-4-1, these devices may provide the following control and protection functions.

- Disconnect for motor branch circuit
- Short-circuit protection (magnetic protection)
- Overload protection (thermal protection)
- Manual switching (motor control means)

Group motor installations eliminate the need for individual branch short-circuit protective devices for each motor circuit, reducing panel space, installation and wiring time, and costs. There is only one Branch Circuit Protective Device (BCPD) for the "Group". Bulletin 140MT devices are also UL Listed for Tap Conductor protection in group installations, which helps reduce conductor sizing.

According to UL 60947-4-1, CSA C22.2 No.60947-4-1, these devices certified for group motor installation may provide the following control and protection functions.

- Disconnect for motor branch circuit
- Overload protection (thermal protection)
- Manual switching (motor control means)

Bulletin 140MT devices meet requirement of MPSDs according to IEC 60947-4-1 and Circuit Breakers according to the IEC 60947-2 standard for application outside of North America. These devices provide the following functions.

- Disconnect for motor branch circuit
- Short-circuit protection (magnetic protection)
- Overload protection (thermal protection)
- Manual switching (motor control means)

Bulletin 140MT devices provide Trip Class 10 overload protection and phase loss sensitivity protection. These are suitable for single- and three- phase applications.

Cat. No. 140MT-D9V devices can also be applied at the output of a variable frequency drive (VFD) in multi-motor applications.



Application Diagrams

Group Installation with MPCBs

There is only one BCPD for the "Group".


Group installation has been successfully used for many years in the U.S. and Canada. It allows "two or motors or one or more motors and other loads to be connected to the same branch-circuit...". The most restrictive part of the conditions specified for Group Installation is the requirement for the protection of the conductors for each motor circuit. In the U.S. NEC for 2002, a new rule for the conductor sizing was added for devices that are listed and marked "Suitable for use as Tap Conductor Protection".

[Figure 8](#) shows an example that illustrates installations involving multiple motors with a single BCPD protecting the entire "Group".

Bulletin 140MT MPCBs are UL/CSA Listed for Group Installation: conductors from the BCPD to each motor must be a minimum of 1/3 the ampacity of the Branch Circuit conductors.

Bulletin 140MT MPCBs are UL/CSA Listed for Tap conductor Protection in Group Installations: conductors from the BCPD to manual motor controller listed as "...Tap Conductor Protection..." must be minimum of 1/10 the rating or setting of the BCPD. Conductors from the controller to the motor must be 125% of the motor FLA.

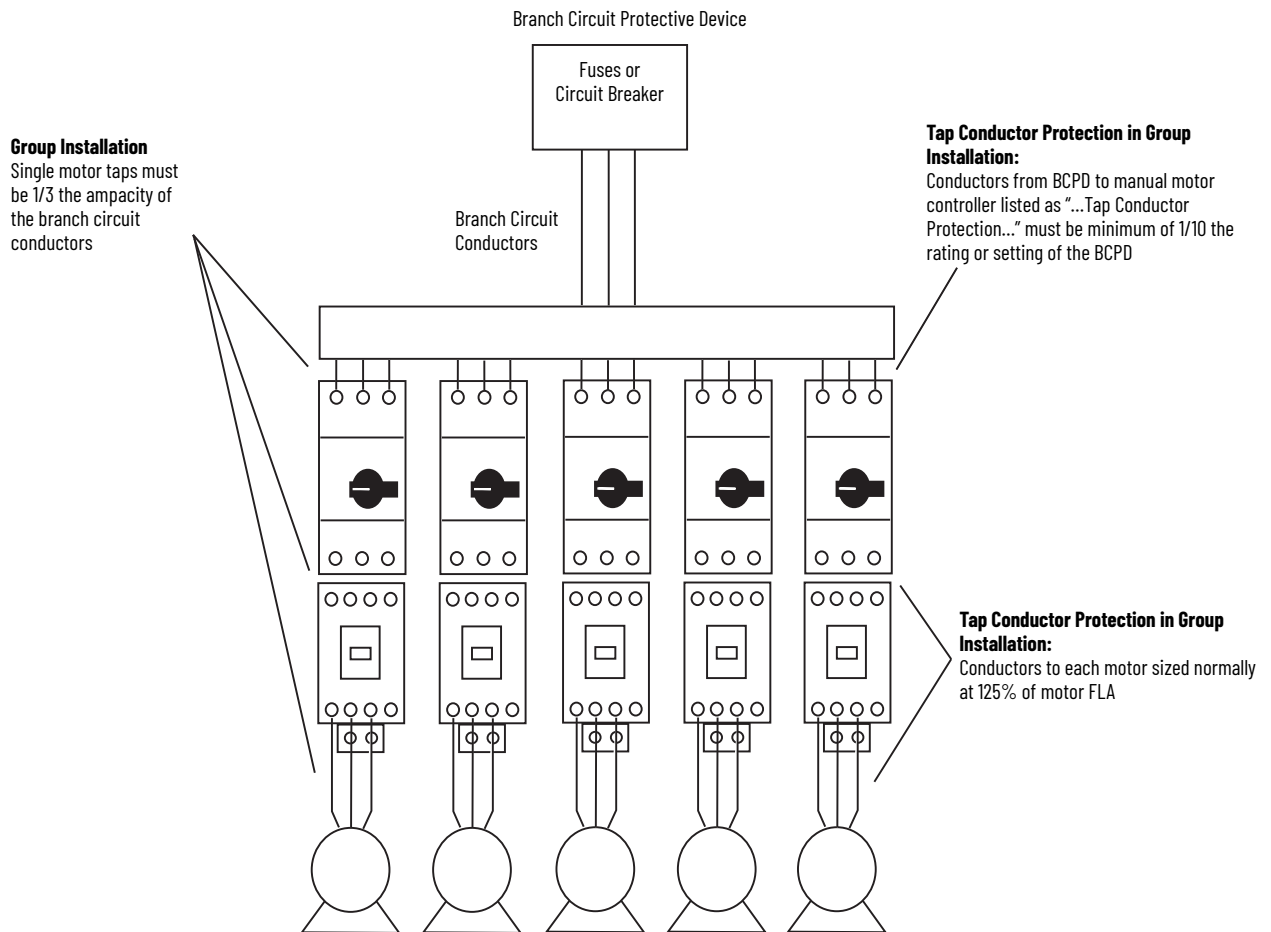Figure 8 - Group Installation with MPCBs




Multiple Motor Installation with MPCBs

Each Motor has an Individual BCPD.

Bulletin 140MT MPCBs are UL/CSA Listed as Type E Manual Self-Protected Combination Motor Controllers or UL/CSA Listed as Circuit Breakers. These UL/CSA Listings allow the Bulletin 140MT MPCBs to provide the branch-circuit, short-circuit protection (and overload protection) for each individual motor circuit. Additional short-circuit protection is not required for the protection of the individual motor circuits, leaving only the requirement for protection of the feeder circuit conductors by an upstream protective device. [Figure 9](#) shows an example that illustrates installations involving multiple motors, each with its own BCPD.

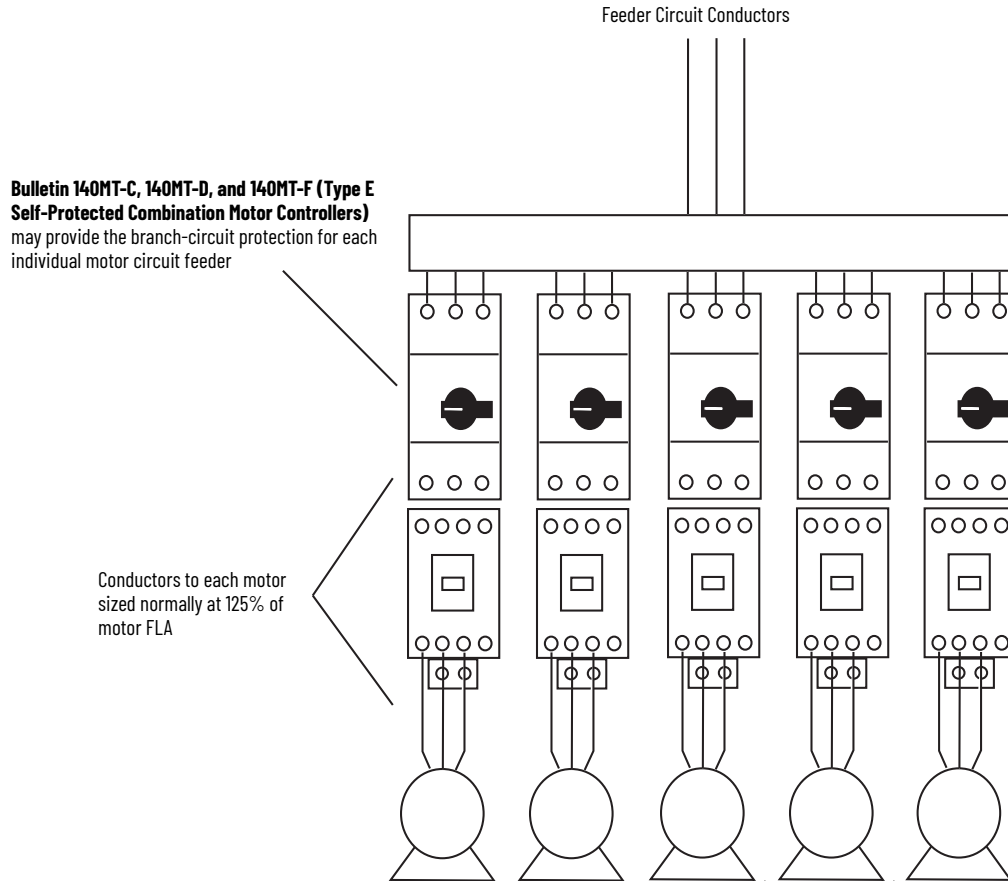Figure 9 - Multiple Motor Installation with MPCBs



Catalog Number Explanation

C- and D-Frame Devices

140MT - C 3 E - B63 - KN - MT - XC - GK
a b c d e f g h i

a	
Bulletin Number	
Code	Description
140MT	140MT Motor Protective Switching Device (Thermal)

b	
Current Rating/ Frame Size	
Code	Description
C	32 A, Frame C
D	40 A, Frame D

c	
Interrupting Rating/ Breaking Capacity	
Code	Description
3	Normal break
9	High break

d	
Function	
Code	Description
E	Adjustable Thermal/Fixed Magnetic ($14 \times I_n$) MPCB
N	Fixed Magnetic ($14 \times I_n$) MCP
T	Adjustable Thermal/Fixed Magnetic ($18...22 \times I_n$) MPCB
V	Fixed Magnetic (application at output of VFD multi-motor)

e	
Current Range	
Code	Description
A	0.10 (example: A16 = 0.16 A)
B	1.0 (example: B16 = 1.6 A)
C	10 (example: C16 = 16 A)

f	
Knob and Adapters	
Code	Description
KN	Black lockable knob
KY	Red/yellow lockable knob
KB	Blue lockable knob (C-Frame only)
TE	Normal break

g	
Mounting Type	
Code	Description
MT	Standard busbar mount, top

h	
Auxiliary Contacts ⁽¹⁾	
Bottom Front	
1st Code	Description
X	No contact
B	1 N.O.
C	1 N.O. + 1 N.C.
D	2 N.O.
R	1 N.C. + 1 N.O. (SC+OL)
S	1 N.O. + 1 N.O. (SC+OL)
M	1 N.O. + 1 N.C. (SC+OL)
N	1 N.O. (SC+OL) + 1 N.O. (SC)
Right Side	
2nd Code	Description
X	No contact
C	1 N.O. + 1 N.C.
D	2 N.C.
E	2 N.C.

i	
Undervoltage and Shunt Trips	
Code	Description
Undervoltage Trip Units	
GK	24V, 50 Hz
GD	110V, 50 Hz/120V, 60 Hz
GF	220...230V, 50 Hz
GA	240...260V, 60 Hz
GN	380...400V, 50 Hz
GB	480V, 60 Hz/415V, 50 Hz
Shunt Trip Units	
PK	24V, 50 Hz
PD	110V, 50 Hz / 120V 60 Hz
PF	220...230V, 50 Hz
PA	240...260V, 60 Hz
PT	240V, 50 Hz/277V, 60 Hz
PN	380...400V, 50 Hz
PB	480V, 60 Hz/415V, 50 Hz
PZJ	24V DC

(1) Choose up to two auxiliary contacts. Use the first character in the code to specify the front mounted auxiliary contact; use the second character to specify the right side-mounted auxiliary contact. Example: code -XC is for no front-mounted contact, and a side-mounted auxiliary contact with 1 N.O. and 1 N.C. contact.

F-Frame Devices

140MT - F 9 E - C10
a b c d e

a	
Bulletin Number	
Code	Description
140MT	140MT Motor Protection Circuit Breaker

b	
Current Rating/ Frame Size	
Code	Description
F	45 A, Frame F

c	
Interrupting Rating/ Breaking Capacity	
Code	Description
9	High break

d	
Function	
Code	Description
E	Adjustable Thermal/Fixed Magnetic ($15 \times I_n$) MPCB
N	Fixed Magnetic ($15 \times I_n$) MCP
T	Adjustable Thermal/Fixed Magnetic ($19...22 \times I_n$) MPCB

e	
Current Range	
Code	Description
C	10 (example: C16 = 16 A)

Product Selection

Selection Using Current and Hp/kW Ratings

Table 27 - Motor Protective Switching Devices

Rated Operational Current (I_e) [A]	Motor Current Adjustment Range [A]	Nominal Magnetic Trip Current [A]	Max Short-circuit Current [kA]		Max. 3-phase Hp Ratings ⁽¹⁾				Max. kW, 3-Phase – AC-3 ⁽¹⁾				Cat. No.
			400V (I_{cu})	480V (group motor)	200V	230V	460V	575V	230V	400/415V	500V	690V	
C-Frame, Adjustable Thermal/Fixed Magnetic (14 x I_n)													
0.16	0.10...0.16	2.2	100	65	—	—	—	—	—	0.02	0.06	0.06	140MT-C3E-A16
0.25	0.16...0.25	3.5	100	65	—	—	—	—	—	0.04	0.09	0.09	140MT-C3E-A25
0.4	0.25...0.40	5.6	100	65	—	—	—	—	0.06	0.09	0.12	0.18	140MT-C3E-A40
0.63	0.40...0.63	8.8	100	65	—	—	—	—	0.09	0.18	0.18	0.25	140MT-C3E-A63
1	0.63...1.0	14	100	65	—	—	0.5	0.5	0.18	0.25	0.37	0.55	140MT-C3E-B10
1.6	1.0...1.6	22	100	65	—	—	0.75	0.75	0.25	0.55	0.75	1.1	140MT-C3E-B16
2.5	1.6...2.5	35	100	65	0.5	0.5	1	1.5	0.37	0.75	1.1	1.8	140MT-C3E-B25
4	2.5...4.0	56	100	65	0.75	0.75	2	3	0.75	1.5	2.2	3	140MT-C3E-B40
6.3	4.0...6.3	88	100	65	1	1.5	3	5	1.5	2.2	3	4	140MT-C3E-B63
10	6.3...10	140	100	65	2	2	5	7.5	2.2	4	6.3	7.5	140MT-C3E-C10
16	10...16	224	65	30	3	5	10	10	4	7.5	10	13	140MT-C3E-C16
20	14.5...20	280	50	30	5	5	10	15	5.5	10	11	17	140MT-C3E-C20
25	18...25	350	15	30	5	7.5	15	20	5.5	11	15	22	140MT-C3E-C25
29	23...29	406	15	30	7.5	10	20	25	7.5	13	18.5	25	140MT-C3E-C29
32	26.5...32	448	15	30	7.5	10	20	30	7.5	15	20	25	140MT-C3E-C32
D-Frame, Adjustable Thermal/Fixed Magnetic (14 x I_n)													
0.63	0.40...0.63	8.8	100	65	—	—	—	—	0.09	0.18	0.18	0.25	140MT-D9E-A63
1	0.63...1.0	14	100	65	—	—	0.5	0.5	0.18	0.25	0.37	0.55	140MT-D9E-B10
1.6	1.0...1.6	22	100	65	—	—	0.75	0.75	0.25	0.55	0.75	1.1	140MT-D9E-B16
2.5	1.6...2.5	35	100	65	0.5	0.5	1	1.5	0.37	0.75	1.1	1.8	140MT-D9E-B25
4	2.5...4.0	56	100	65	0.75	0.75	2	3	0.75	1.5	2.2	3	140MT-D9E-B40
6.3	4.0...6.3	88	100	65	1	1.5	3	5	1.5	2.2	3	4	140MT-D9E-B63
10	6.3...10	140	100	65	2	2	5	7.5	2.2	4	6.3	7.5	140MT-D9E-C10
16	10...16	224	100	65	3	5	10	10	4	7.5	10	13	140MT-D9E-C16
20	14.5...20	280	100	65	5	5	10	15	5.5	10	11	17	140MT-D9E-C20
25	18...25	350	65	50	5	7.5	15	20	5.5	11	15	22	140MT-D9E-C25
29	23...29	406	50	50	7.5	10	20	25	7.5	13	18.5	25	140MT-D9E-C29
32	26.5...32	448	50	50	7.5	10	20	30	7.5	15	20	25	140MT-D9E-C32
36	30...36	432	50	30	10	10	25	30		18.5	20	25	140MT-D9E-C36 ⁽²⁾
40	34...40	480	50	30	10	10	30	30	11	20	24	30	140MT-D9E-C40 ⁽²⁾
D-Frame, Fixed Magnetic (application at output of VFD multi-motor)													
1.6	1.0...1.6	88	100	65	—	—	0.75	—	0.25	0.55	0.75	—	140MT-D9V-B16
2.5	1.6...2.5	88	100	65	0.5	0.5	1	—	0.37	0.75	1.1	—	140MT-D9V-B25
4	2.5...4.0	88	100	65	0.75	0.75	2	—	0.75	1.5	2.2	—	140MT-D9V-B40
6.3	4.0...6.3	88	100	65	1	1.5	3	—	1.5	2.2	3	—	140MT-D9V-B63
10	6.3...10	140	100	65	2	2	5	—	2.2	4	6.3	—	140MT-D9V-C10
16	10...16	224	100	65	3	5	10	—	4	7.5	10	—	140MT-D9V-C16
20	14.5...20	280	100	65	5	5	10	—	5.5	10	11	—	140MT-D9V-C20
25	18...25	350	65	50	5	7.5	15	—	5.5	11	15	—	140MT-D9V-C25
29	23...29	406	50	50	7.5	10	20	—	7.5	13	18.5	—	140MT-D9V-C29
32	26.5...32	448	50	50	7.5	10	20	—	7.5	15	20	—	140MT-D9V-C32
36	30...36	432	50	30	10	10	25	—	—	18.5	20	—	140MT-D9V-C36 ⁽²⁾
40	34...40	480	50	30	10	10	30	—	11	20	24	—	140MT-D9V-C40 ⁽²⁾

Table 27 - Motor Protective Switching Devices (Continued)

Rated Operational Current (I_e) [A]	Motor Current Adjustment Range [A]	Nominal Magnetic Trip Current [A]	Max Short-circuit Current [kA]		Max. 3-phase Hp Ratings ⁽¹⁾				Max. kW, 3-Phase – AC-3 ⁽¹⁾				Cat. No.
			400V (I_{cu})	480V (group motor)	200V	230V	460V	575V	230V	400/415V	500V	690V	
F-Frame, Adjustable Thermal/Fixed Magnetic (15 x I_n)													
12	9...12	180	100	65	3	3	7.5	10	3	5.5	5.5	7.5	140MT-F9E-C12
16	12...16	240	100	65	3	5	10	10	4	7.5	10	11	140MT-F9E-C16
20	15...20	300	100	65	5	5	10	15	5.5	7.5	11	15	140MT-F9E-C20
25	19...25	375	100	65	5	7.5	15	20	5.5	11	15	22	140MT-F9E-C25
32	24...32	480	65	65	7.5	10	20	30	7.5	15	18.5	30	140MT-F9E-C32
38	30...38	570	65	65	10	10	25	30	11	18.5	22	30	140MT-F9E-C38
45	36...45	675	65	65	10	15	30	40	11	22	30	37	140MT-F9E-C45

(1) Hp/kW ratings shown are for reference. The final selection of the MPCB/MPSD depends on the actual motor full load current.

(2) Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150 mm (10 x 7 x 6 in).

Table 28 - High Inrush Motor Protection Switching Devices

Rated Operational Current (I_e) [A]	Motor Current Adjustment Range [A]	Nominal Magnetic Trip Current [A]	Max Short-circuit Current [kA]		Max. 3-phase Hp Ratings ⁽¹⁾				Max. kW, 3-Phase – AC-3 ⁽¹⁾				Cat. No.
			400V	480V	200V	230V	460V	575V	230V	400/415V	500V	690V	
			(I_{cu})	(group motor)									
D-Frame, Adjustable Thermal/Fixed Magnetic (18...22 x I_n)													
0.16	0.10...0.16	3.5	100	65	—	—	—	—	—	0.02	0.06	0.06	140MT-D9T-A16
0.25	0.16...0.25	5.5	100	65	—	—	—	—	—	0.04	0.09	0.09	140MT-D9T-A25
0.4	0.25...0.40	8.8	100	65	—	—	—	—	0.06	0.09	0.12	0.18	140MT-D9T-A40
0.63	0.40...0.63	14	100	65	—	—	—	—	0.09	0.18	0.18	0.25	140MT-D9T-A63
1	0.63...1.0	22	100	65	—	—	0.5	0.5	0.18	0.25	0.37	0.55	140MT-D9T-B10
1.6	1.0...1.6	35	100	65	—	—	0.75	0.75	0.25	0.55	0.75	1.1	140MT-D9T-B16
2.5	1.6...2.5	55	100	65	0.5	0.5	1	1.5	0.37	0.75	1.1	1.8	140MT-D9T-B25
4	2.5...4.0	88	100	65	0.75	0.75	2	3	0.75	1.5	2.2	3	140MT-D9T-B40
6.3	4.0...6.3	139	100	65	1	1.5	3	5	1.5	2.2	3	4	140MT-D9T-B63
10	6.3...10	220	100	65	2	2	5	7.5	2.2	4	6.3	7.5	140MT-D9T-C10
16	10...16	320	100	65	3	5	10	10	4	7.5	10	13	140MT-D9T-C16
20	14.5...20	400	100	65	5	5	10	15	5.5	10	11	17	140MT-D9T-C20
25	18...25	450	65	50	5	7.5	15	20	5.5	11	15	22	140MT-D9T-C25
F-Frame, Adjustable Thermal/Fixed Magnetic (19...22 x I_n)													
25	19...25	550	65	65	5	7.5	15	20	5.5	11	15	22	140MT-F9T-C25
32	24...32	704	65	65	7.5	10	20	30	7.5	15	18.5	30	140MT-F9T-C32
38	30...38	836	65	65	10	10	25	30	11	18.5	22	30	140MT-F9T-C38
45	36...45	990	65	65	10	15	30	40	11	22	30	37	140MT-F9T-C45

(1) Hp/kW ratings shown are for reference. The final selection of the MPCB/MPSD depends on the actual motor full load current.

Table 29 - Motor Circuit Protectors

Rated Operational Current (I_e) [A]	Motor Current Adjustment Range [A]	Nominal Magnetic Trip Current [A]	Max. Short Circuit Current [kA]		Max. 3-phase Hp Ratings ⁽¹⁾				Max. kW, 3-Phase – AC-3 ⁽¹⁾				Cat. No.
			400V	480V	200V	230V	460V	575V	230V	400/415V	500V	690V	
			(I_{cu})	(group motor)									
D-Frame, Fixed Magnetic (14 x I_n)													
0.16	—	2.2	100	65	—	—	—	—	—	0.02	0.06	0.06	140MT-D9N-A16
0.25	—	3.5	100	65	—	—	—	—	—	0.04	0.09	0.09	140MT-D9N-A25
0.4	—	5.6	100	65	—	—	—	—	0.06	0.09	0.12	0.18	140MT-D9N-A40
0.63	—	8.8	100	65	—	—	—	—	0.09	0.18	0.18	0.25	140MT-D9N-A63
1	—	14	100	65	—	—	0.5	0.5	0.18	0.25	0.37	0.55	140MT-D9N-B10
1.6	—	22	100	65	—	—	0.75	0.75	0.25	0.55	0.75	1.1	140MT-D9N-B16
2.5	—	35	100	65	0.5	0.5	1	1.5	0.37	0.75	1.1	1.8	140MT-D9N-B25
4	—	56	100	65	0.75	0.75	2	3	0.75	1.5	2.2	3	140MT-D9N-B40
6.3	—	88	100	65	1	1.5	3	5	1.5	2.2	3	4	140MT-D9N-B63
10	—	140	100	65	2	2	5	7.5	2.2	4	6.3	7.5	140MT-D9N-C10
16	—	224	100	65	3	5	10	10	4	7.5	10	13	140MT-D9N-C16
20	—	280	100	65	5	5	10	15	5.5	10	11	17	140MT-D9N-C20
25	—	350	65	50	5	7.5	15	20	5.5	11	15	22	140MT-D9N-C25
29	—	406	50	50	7.5	10	20	25	7.5	13	18.5	25	140MT-D9N-C29
32	—	448	50	50	7.5	10	20	30	7.5	15	20	25	140MT-D9N-C32
36	—	432	50	30	10	10	25	30	—	18.5	20	25	140MT-D9N-C36 ⁽²⁾
40	—	480	50	30	10	10	30	30	11	20	24	30	140MT-D9N-C40 ⁽²⁾
F-Frame, Fixed Magnetic (15 x I_n)													
25	—	375	100	65	5	7.5	15	20	5.5	11	15	22	140MT-F9N-C25
32	—	480	65	65	7.5	10	20	30	7.5	15	18.5	30	140MT-F9N-C32
38	—	570	65	65	10	10	25	30	11	18.5	22	30	140MT-F9N-C38
45	—	675	65	65	10	15	30	40	11	22	30	37	140MT-F9N-C45

(1) Hp/kW ratings shown are for reference. The final selection of the MCP depends on the actual motor full load current.

(2) Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150 mm (10 x 7 x 6 in).



Motor Circuit Protectors (Cat. No. 140MT-D9N, 140MT-F9N) do not provide thermal protection for themselves nor for downstream components. You must install a separate protective device against thermal overload, such as an overload relay as part of a starter combination. In applications that use these devices as the short-circuit protection device of heavy-duty starting motors, the rated operational current I_e of the devices must be over-sized using the factors in [Table 30](#).

Table 30 - Oversizing for Heavy-duty Starting

Current Range [A]	Device Type	Class 10	Class 20	Class 30
0.16...10	140MT-D9N	—	—	—
16...29		—	—	1.41
32...40		—	1.41	1.73
9...38	140MT-F9N	—	1.41	1.73
45...80		—	—	1.41

Selection Using Application Ratings

See [page 46](#) for combination ratings.

Table 31 - UL/CSA Listed Application Ratings, Motor Protective Switching Devices

UL 60947-4-1 – Manual Motor Controller							UL 60947-4-1 Self-Protected (Type E) Combination Motor Controller		Cat. No.
Max. Fuse or Circuit Breaker per NEC [A]	Max Short-circuit Current [kA]						Max Short-circuit Current [kA]		
	Group Motor Installation		Motor Disconnect		Tap Conductor Protection				
	480V	600V	480V	600V	480Y/277V ⁽¹⁾	600Y/347V ⁽¹⁾	480Y/277V ⁽¹⁾	600Y/347V ⁽¹⁾	
C-Frame, Adjustable Thermal/Fixed Magnetic (14 x I _n)									
450	65	50	65	50	65	50	65	50	140MT-C3E-A16
450	65	50	65	50	65	50	65	50	140MT-C3E-A25
450	65	50	65	50	65	50	65	50	140MT-C3E-A40
450	65	50	65	50	65	50	65	50	140MT-C3E-A63
450	65	50	65	50	65	50	65	50	140MT-C3E-B10
450	65	50	65	50	65	50	65	50	140MT-C3E-B16
450	65	30	65	30	65	30	65	30	140MT-C3E-B25
450	65	30	65	30	65	30	65	30	140MT-C3E-B40
450	65	30	65	30	65	—	65	—	140MT-C3E-B63
450	65	30	65	30	65	—	65	—	140MT-C3E-C10
450	30	30	30	30	30	—	30	—	140MT-C3E-C16
450	30	30	30	10	—	—	—	—	140MT-C3E-C20
450	30	18	30	5	—	—	—	—	140MT-C3E-C25
450	30	10	10	--	—	—	—	—	140MT-C3E-C29
450	30	10	10	--	—	—	—	—	140MT-C3E-C32
D-Frame, Adjustable Thermal/Fixed Magnetic (14 x I _n)									
450	65	50	65	50	65	50	65	50	140MT-D9E-A63
450	65	50	65	50	65	50	65	50	140MT-D9E-B10
450	65	50	65	50	65	50	65	50	140MT-D9E-B16
450	65	30	65	30	65	30	65	30	140MT-D9E-B25
450	65	30	65	30	65	30	65	30	140MT-D9E-B40
450	65	30	65	30	65	30	65	30	140MT-D9E-B63
450	65	30	65	30	65	30	65	30	140MT-D9E-C10
450	65	30	65	30	65	30	65	30	140MT-D9E-C16
450	65	30	65	30	65	—	65	—	140MT-D9E-C20
450	50	30	50	30	50	—	50	—	140MT-D9E-C25
450	50	30	50	30	50	—	50	—	140MT-D9E-C29
450	50	30	50	30	30	—	30	—	140MT-D9E-C32
450	50	30	50	30	30	—	30	—	140MT-D9E-C36 ⁽²⁾
450	50	30	50	30	30	—	30	—	140MT-D9E-C40 ⁽²⁾
D-Frame, Adjustable Thermal/Fixed Magnetic (application at output of VFD multi-motor)									
450	65	—	65	—	65	—	65	—	140MT-D9V-B16
450	65	—	65	—	65	—	65	—	140MT-D9V-B25
450	65	—	65	—	65	—	65	—	140MT-D9V-B40
450	65	—	65	—	65	—	65	—	140MT-D9V-B63
450	65	—	65	—	65	—	65	—	140MT-D9V-C10
450	65	—	65	—	65	—	65	—	140MT-D9V-C16
450	65	—	65	—	65	—	65	—	140MT-D9V-C20
450	50	—	50	—	50	—	50	—	140MT-D9V-C25
450	50	—	50	—	50	—	50	—	140MT-D9V-C29
450	50	—	50	—	30	—	30	—	140MT-D9V-C32
450	50	—	50	—	30	—	30	—	140MT-D9V-C36 ⁽²⁾
450	50	—	50	—	30	—	30	—	140MT-D9V-C40 ⁽²⁾

Table 31 - UL/CSA Listed Application Ratings, Motor Protective Switching Devices (Continued)

UL 60947-4-1 – Manual Motor Controller							UL 60947-4-1 Self-Protected (Type E) Combination Motor Controller		Cat. No.
Max. Fuse or Circuit Breaker per NEC [A]	Max Short-circuit Current [kA]						Max Short-circuit Current [kA]		
	Group Motor Installation		Motor Disconnect		Tap Conductor Protection				
	480V	600V	480V	600V	480Y/277V ⁽¹⁾	600Y/347V ⁽¹⁾	480Y/277V ⁽¹⁾	600Y/347V ⁽¹⁾	
D-Frame, Adjustable Thermal/Fixed Magnetic (18...22 x I _n)									
450	65	50	65	50	65	50	65	50	140MT-D9T-A16
450	65	50	65	50	65	50	65	50	140MT-D9T-A25
450	65	50	65	50	65	50	65	50	140MT-D9T-A40
450	65	50	65	50	65	50	65	50	140MT-D9T-A63
450	65	50	65	50	65	50	65	50	140MT-D9T-B10
450	65	50	65	50	65	50	65	50	140MT-D9T-B16
450	65	30	65	30	65	30	65	30	140MT-D9T-B25
450	65	30	65	30	65	30	65	30	140MT-D9T-B40
450	65	30	65	30	65	30	65	30	140MT-D9T-B63
450	65	30	65	30	65	30	65	30	140MT-D9T-C10
450	65	30	65	30	65	30	65	—	140MT-D9T-C16
450	65	30	65	30	65	—	65	—	140MT-D9T-C20
450	50	30	50	18	50	—	50	—	140MT-D9T-C25
F-Frame, Adjustable Thermal/Fixed Magnetic (15 x I _n)									
600	65	30	65	30	65	30	65	30	140MT-F9E-C12
600	65	30	65	30	65	30	65	30	140MT-F9E-C16
600	65	30	65	30	65	30	65	30	140MT-F9E-C20
600	65	30	65	30	65	30	65	30	140MT-F9E-C25
600	65	30	65	30	65	30	65	30	140MT-F9E-C32
600	65	30	65	30	65	30	65	30	140MT-F9E-C38
600	65	30	65	30	65	30	65	30	140MT-F9E-C45
F-Frame, Adjustable Thermal/Fixed Magnetic (19...22 x I _n)									
600	65	30	65	30	65	30	65	30	140MT-F9T-C25
600	65	30	65	30	65	30	65	30	140MT-F9T-C32
600	65	30	65	30	65	30	65	30	140MT-F9T-C38
600	65	30	65	30	65	30	65	30	140MT-F9T-C45

(1) For full voltage (delta) ratings above 277V or 347V, follow the NEC or CEC rules for group motor applications.

(2) Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150 mm (10 x 7 x 6 in).

Table 32 - UL/CSA Listed Application Ratings, Motor Circuit Protectors

UL 60947-4-1 – Manual Motor Controller							Cat. No.
Max. Fuse or Circuit Breaker per NEC [A]	Max. Short Circuit Current [kA]						
	Group Motor Installation		Motor Disconnect		Tap Conductor Protection		
	480V	600V	480V	600V	480Y/277V ⁽¹⁾	600Y/347V ⁽¹⁾	
D-Frame, Fixed Magnetic (14 x I _n)							
450	65	50	65	50	65	50	140MT-D9N-A16
450	65	50	65	50	65	50	140MT-D9N-A25
450	65	50	65	50	65	50	140MT-D9N-A40
450	65	50	65	50	65	50	140MT-D9N-A63
450	65	50	65	50	65	50	140MT-D9N-B10
450	65	50	65	50	65	50	140MT-D9N-B16
450	65	30	65	30	65	30	140MT-D9N-B25
450	65	30	65	30	65	30	140MT-D9N-B40
450	65	30	65	30	65	30	140MT-D9N-B63
450	65	30	65	30	65	30	140MT-D9N-C10
450	65	30	65	30	65	30	140MT-D9N-C16
450	65	30	65	30	65	—	140MT-D9N-C20
450	50	30	50	30	50	—	140MT-D9N-C25
450	50	30	50	30	50	—	140MT-D9N-C29
450	50	30	50	30	30	—	140MT-D9N-C32
450	50	30	50	30	30	—	140MT-D9N-C36 ⁽²⁾
450	50	30	50	30	30	—	140MT-D9N-C40 ⁽²⁾
F-Frame, Fixed Magnetic (15 x I _n)							
600	65	30	65	30	—	—	140MT-F9N-C25
600	65	30	65	30	—	—	140MT-F9N-C32
600	65	30	65	30	—	—	140MT-F9N-C38
600	65	30	65	30	—	—	140MT-F9N-C45

(1) For full voltage (delta) ratings above 277V or 347V, follow the NEC or CEC rules for group motor applications.

(2) Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150 mm (10 x 7 x 6 in).

Table 33 - IEC Application Ratings, Interrupting Rating/Breaking Capacity

Breaking Capacity, IEC 60947-2															Cat. No.	
230/240V AC			400/415V AC			440/460V AC			500/525V AC			690V AC				
I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]		
C-Frame, Adjustable Thermal/Fixed Magnetic (14 x I_n)																
100	100	_(2)	100	100	_(2)	100	100	_(2)	100	100	_(2)	100	100	_(2)	140MT-C3E-A16	
100	100		100	100		100	100		100	100		100	100		140MT-C3E-A25	
100	100		100	100		100	100		100	100		100	100		140MT-C3E-A40	
100	100		100	100		100	100		100	100		100	100		140MT-C3E-A63	
100	100		100	100		100	100		100	100		100	100		140MT-C3E-B10	
100	100		100	100		100	100		100	100		4	4	16	140MT-C3E-B16	
100	100		100	100		100	100		100	100		4	4	20	140MT-C3E-B25	
100	100		100	100		100	100		100	100		4	4	35	140MT-C3E-B40	
100	100		100	100		100	100		100	100		3	3	50	140MT-C3E-B63	
100	100		100	100	50	80	50	50	80	50	50	63	3	3	50	140MT-C3E-C10
100	100		100	65	50	80	10	6	80	10	6	80	3	3	63	140MT-C3E-C16
65	50	100	50	15	100	6	6	80	6	6	80	3	2	63	140MT-C3E-C20	
65	50	100	15	15	100	6	4	80	6	4	80	3	2	63	140MT-C3E-C25	
50	25	125	15	10	125	6	4	100	6	4	100	3	2	80	140MT-C3E-C29	
50	25	125	15	10	125	6	4	100	6	4	100	3	2	80	140MT-C3E-C32	

Table 33 - IEC Application Ratings, Interrupting Rating/Breaking Capacity (Continued)

Breaking Capacity, IEC 60947-2															Cat. No.
230/240V AC			400/415V AC			440/460V AC			500/525V AC			690V AC			
I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	
D-Frame, Adjustable Thermal/Fixed Magnetic (14 x I_n)															
100	100	— ⁽²⁾	100	100	— ⁽²⁾	100	100	— ⁽²⁾	100	100	— ⁽²⁾	100	100	— ⁽²⁾	140MT-D9E-A63
100	100		100	100		100	100		100	100		100	100		140MT-D9E-B10
100	100		100	100		100	100		100	100		100	100		140MT-D9E-B16
100	100		100	100		100	100		100	100		6	4	20	140MT-D9E-B25
100	100		100	100		100	100		100	100		6	4	35	140MT-D9E-B40
100	100		100	100		100	100		100	100		6	4	50	140MT-D9E-B63
100	100		100	100	100	100	100	100	6	3	50	140MT-D9E-C10			
100	100		100	50	80	50	25	80	50	25	80	4	3	63	140MT-D9E-C16
100	100		100	25	100	50	25	100	50	25	80	4	3	63	140MT-D9E-C20
100	100		65	25	100	35	20	100	35	20	80	4	3	63	140MT-D9E-C25
65	50	125	50	25	125	25	15	125	25	15	100	4	3	80	140MT-D9E-C29
65	50	125	50	25	125	25	15	125	25	15	100	4	3	80	140MT-D9E-C32
50	35	125	50	25	125	12	6	125	12	6	100	3	2	100	140MT-D9E-C36 ⁽³⁾
50	35	125	50	25	125	12	6	125	12	6	100	3	2	100	140MT-D9E-C40 ⁽³⁾
D-Frame, Fixed Magnetic (application at output of VFD multi-motor)															
100	100	— ⁽²⁾	100	100	— ⁽²⁾	100	100	— ⁽²⁾	100	100	— ⁽²⁾	—	—	— ⁽²⁾	140MT-D9V-B16
100	100		100	100		100	100		100	100		—	—		140MT-D9V-B25
100	100		100	100		100	100		100	100		—	—		140MT-D9V-B40
100	100		100	100		100	100		100	100		—	—		140MT-D9V-B63
100	100		100	100		100	100		100	100		—	—		140MT-D9V-C10
100	100		100	50	80	50	25	80	50	25	80	—	—		140MT-D9V-C16
100	100		100	25	100	50	25	100	50	25	80	—	—		140MT-D9V-C20
100	100		65	25	100	35	20	100	35	20	80	—	—		140MT-D9V-C25
65	50	125	50	25	125	25	15	125	25	15	100	—	—		140MT-D9V-C29
65	50	125	50	25	125	25	15	125	25	15	100	—	—		140MT-D9V-C32
50	35	125	50	25	125	12	6	125	12	6	100	—	—	140MT-D9V-C36 ⁽³⁾	
50	35	125	50	25	125	12	6	125	12	6	100	—	—	140MT-D9V-C40 ⁽³⁾	
F-Frame, Adjustable Thermal/Fixed Magnetic (15 x I_n)															
100	100	—	100	100	—	50	25	80	50	25	80	10	6	63	140MT-F9E-C12
100	100		100	50		50	25	100	50	25	100	10	6	80	140MT-F9E-C16
100	100		100	35		50	25	100	50	25	100	10	6	80	140MT-F9E-C20
100	100		100	35		50	25	100	50	25	100	10	6	80	140MT-F9E-C25
100	100		65	35	125	50	15	125	50	15	125	10	4	100	140MT-F9E-C32
100	100		65	35	125	50	15	125	50	15	125	10	4	100	140MT-F9E-C38
100	100		65	35	125	50	15	125	50	15	125	10	4	100	140MT-F9E-C45

Table 33 - IEC Application Ratings, Interrupting Rating/Breaking Capacity (Continued)

Breaking Capacity, IEC 60947-2															Cat. No.			
230/240V AC			400/415V AC			440/460V AC			500/525V AC			690V AC						
I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]				
D-Frame, High Inrush, Adjustable Thermal/Fixed Magnetic (18...22 x I_n)																		
100	100	_ (2)	100	100	_ (2)	100	100	_ (2)	100	100	_ (2)	100	100	_ (2)	140MT-D9T-A16			
100	100		100	100		100	100		100	100		100	100		140MT-D9T-A25			
100	100		100	100		100	100		100	100		100	100		140MT-D9T-A40			
100	100		100	100		100	100		100	100		100	100		140MT-D9T-A63			
100	100		100	100		100	100		100	100		100	100		140MT-D9T-B10			
100	100		100	100		100	100		100	100		100	100		140MT-D9T-B16			
100	100		100	100		100	100		100	100		100	100	100	6	4	20	140MT-D9T-B25
100	100		100	100		100	100		100	100		100	100	100	6	4	35	140MT-D9T-B40
100	100		100	100		100	100		100	100		100	100	100	6	4	50	140MT-D9T-B63
100	100		100	100		100	100		100	100		100	100	100	6	3	50	140MT-D9T-C10
100	100		100	50	80	50	25	80	50	25	80	4	3	63	140MT-D9T-C16			
100	100		100	25	100	50	25	100	50	25	80	4	2	63	140MT-D9T-C20			
100	100		65	25	100	35	12	100	35	12	80	4	2	63	140MT-D9T-C25			
F-Frame, High Inrush, Adjustable Thermal/Fixed Magnetic (19...22 x I_n)																		
100	100	—	65	35	—	25	15	100	25	15	100	10	6	80	140MT-F9T-C25			
100	100		65	35	125	25	15	125	25	15	125	10	4	100	140MT-F9T-C32			
100	100		65	35	125	25	15	125	25	15	125	10	4	100	140MT-F9T-C38			
100	100		65	35	125	25	15	125	25	15	125	10	4	100	140MT-F9T-C45			
D-Frame, Motor Circuit Protectors, Fixed Magnetic (14 x I_n)																		
100	100	_ (2)	100	100	_ (2)	100	100	_ (2)	100	100	_ (2)	100	100	_ (2)	140MT-D9N-A16			
100	100		100	100		100	100		100	100		100	100		100	100	140MT-D9N-A25	
100	100		100	100		100	100		100	100		100	100		100	100	140MT-D9N-A40	
100	100		100	100		100	100		100	100		100	100		100	100	140MT-D9N-A63	
100	100		100	100		100	100		100	100		100	100		100	100	140MT-D9N-B10	
100	100		100	100		100	100		100	100		100	100		100	100	140MT-D9N-B16	
100	100		100	100		100	100		100	100		100	100	100	6	4	20	140MT-D9N-B25
100	100		100	100		100	100		100	100		100	100	100	6	4	35	140MT-D9N-B40
100	100		100	100		100	100		100	100		100	100	100	6	4	50	140MT-D9N-B63
100	100		100	100		100	100		100	100		100	100	100	6	3	50	140MT-D9N-C10
100	100		100	50	80	50	25	80	50	25	80	4	3	63	140MT-D9N-C16			
100	100		100	25	100	50	25	100	50	25	80	4	3	63	140MT-D9N-C20			
100	100		65	25	100	35	20	100	35	20	80	4	3	63	140MT-D9N-C25			
65	50		125	50	25	125	25	15	125	25	15	100	4	3	80	140MT-D9N-C29		
65	50	125	50	25	125	25	15	125	25	15	100	4	3	80	140MT-D9N-C32			
50	35	125	50	25	125	12	6	125	12	6	100	3	2	100	140MT-D9N-C36 ⁽³⁾			
50	35	125	50	25	125	12	6	125	12	6	100	3	2	100	140MT-D9N-C40 ⁽³⁾			
F-Frame, Motor Circuit Protectors, Fixed Magnetic (15 x I_n)																		
100	100	—	100	35	—	50	25	100	50	25	100	10	6	80	140MT-F9N-C25			
100	100		65	35	125	50	15	125	50	15	125	10	4	100	140MT-F9N-C32			
100	100		65	35	125	50	15	125	50	15	125	10	4	100	140MT-F9N-C38			
100	100		65	35	125	50	15	125	50	15	125	10	4	100	140MT-F9N-C45			







(1) Back-up fuses are type gG, aM.

(2) No Back-up fuse required if $I_{cc} < I_{cs}$.

(3) Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150 mm (10 x 7 x 6 in).

Accessories

Table 34 - Auxiliary Contacts

Description	Operator Position ⁽¹⁾			Term. No.	Contact Description	Connection Diagram ⁽²⁾	For Use With	Cat. No.
	OFF	ON	Tripped					
 Front-Mounted Auxiliary Contact 1-pole or 2-pole - No additional space required - Only one per device	0	X	0	13-14	N.O. Aux		140MT (all) 140UT-D	140MT-C-AFA10
	0	X	0	13-14	N.O. Aux		140MT (all) 140UT-D	140MT-C-AFA11
	X	0	X	21-22	N.C. Aux			
	0	X	0	13-14	N.O. Aux		140MT (all) 140UT-D	140MT-C-AFA20
	0	X	0	23-24	N.O. Aux			
 Right Side-Mounted Auxiliary Contact 2-pole - Adds 9 mm (0.35 in.) to the width of the device - One per device - Not suitable for UL 489 applications	0	X	0	33-34	N.O. Aux		140MT (all) 140UT-D	140MT-C-ASA20
	0	X	0	43-44	N.O. Aux			
	X	0	X	31-32	N.C. Aux		140MT (all) 140UT-D	140MT-C-ASA02
	X	0	X	41-42	N.C. Aux			
	0	X	0	33-34	N.O. Aux		140MT (all) 140UT-D	140MT-C-ASA11
	X	0	X	41-42	N.C. Aux			

(1) X = Contact Closed; 0 = Contact Open

(2) Connection Diagram Reference:




Table 35 - Trip Contacts

Description	Operator Position ⁽¹⁾			Term. No.	Contact Description	Connection Diagram ⁽²⁾	For Use With	Cat. No.
	OFF	ON	Tripped					
 Front-Mounted Trip Contact • 2-pole • Indicates tripping of device • No additional space required	0	X	0	13-14	N.O. Aux		140MT (all) 14OUT-D	140MT-C-AFAR10A10
	0	0	X	27-28	N.O. Trip (short-circuit and overload)			
	X	0	X	11-12	N.C. Aux		140MT (all) 14OUT-D	140MT-C-AFAR10A01
	0	0	X	27-28	N.O. Trip (short-circuit and overload)			
	0	X	0	13-14	N.O. Aux		140MT (all) 14OUT-D	140MT-C-AFAR01A10
	X	X	0	25-26	N.C. Trip (short-circuit and overload)			
	0	0	X	27-28	N.O. Trip (short-circuit and overload)		140MT (all) 14OUT-D	140MT-C-AFAR10M10
	0	0	X	17-18	N.O. Trip (short-circuit)			

(1) X = Contact Closed; 0 = Contact Open

(2) Connection Diagram Reference:




Table 36 - Undervoltage Trip Units

Description	Connection Diagram ⁽¹⁾	Trip Rating	For Use With	Cat. No.
 Undervoltage Trip • Left-side mounted • Adds 18 mm to the width of the device • Automatically trips MPCB/MCP when voltage falls below 35...70%		24V, 50 Hz/24...28V, 60 Hz	140MT (all) 14OUT-D	140MT-C-UXK
		120V, 60 Hz		140MT-C-UXD
		220...230V, 50 Hz		140MT-C-UXF
		240...260V, 60 Hz		140MT-C-UXA
		380...400V, 50 Hz		140MT-C-UXN
		480V, 60 Hz/415V, 50 Hz		140MT-C-UXB

(1) Connection Diagram Reference:





Table 37 - Shunt Trip Units

Description	Connection Diagram ⁽¹⁾	Trip Rating	For Use With	Cat. No.
 Shunt Trip - Left-side mounted - Adds 18 mm to the width of the device - Provides remote tripping of the MPCB/MCP - Maximum on time for DC operated devices: 5 sec.		24V, 50 Hz/24...28V, 60 Hz	140MT (all) 140UT-D	140MT-C-SNK
		110V, 50 Hz/120V, 60 Hz		140MT-C-SND
		220...230V, 50 Hz		140MT-C-SNF
		240...260V, 60 Hz		140MT-C-SNA
		277V, 60 Hz		140MT-C-SNT
		380...400V, 50 Hz		140MT-C-SNN
		480V, 60 Hz/415V, 50 Hz		140MT-C-SNB
		24V DC		140MT-C-SNZJ

(1) Connection Diagram Reference:




Table 38 - Additional Accessories

	Description		For Use With	Cat. No.
	Anti-tamper Shield		140MT (all)	140MT-C-CA
	Lockable Twist Knob - For one padlock 4...6 mm (3/16 in.) diameter shackle - Can be locked in OFF position	Blue	140MT (all) 140UT- D	140MT-C-KB
		Black		140MT-C-KN
		Red/Yellow		140MT-C-KRY
	Locking Tag - Padlock attachment to the lockable handles - Up to three padlocks 4...8 mm (5/16 in.) diameter shackle		140MT-C-KB 140MT-C-KN 140MT-C-KRY	140MT-C-M3
	Door Coupling Handle - For 3 padlocks 4...8 mm (5/16 in.) in diameter - IPX4 Protection/Type 1, 3R Interlock override capability - Can be modified for locking in ON position - Ships with coupling – order extension shaft and legend plate separately	Black	140MT (all) 140UT- D	140MT-C-DN66
		Red/Yellow	140MT (all) 140UT- D	140MT-C-DRY66

Table 38 - Additional Accessories (Continued)

	Description		For Use With	Cat. No.
	Extension Shaft (Short length) • Cut to required length for mounting depth (front of DIN Rail to front of enclosure door) • For Cat. Nos. 140MT-C-DN66 and 140MT-C-DRY66 handles	3.2 cm (1.26 in.)	140MT (all) 140UT- D	140MT-C-DSS
	Extension Shaft (Standard length) • Cut to required length for mounting depth (front of DIN Rail to front of enclosure door) • For Cat. Nos. 140MT-C-DN66 and 140MT-C-DRY66 handles	26 cm (10.24 in.)		140MT-C-DS
	Extension Shaft (Extended length) • Cut to required length for mounting depth (front of DIN Rail to front of enclosure door) • For Cat. Nos. 140MT-C-DN66 and 140MT-C-DRY66 handles	41 cm (16.14 in.)		140MT-C-DSL
	Door Coupling Handle • Type 3, 3R, 4, 4X, 12 (IP66) • For up to 2 padlocks • Fits in 30.5 mm cutout • Requires 140MT-C-DNC coupler	Black	140MT (all) 140UT- D	140MT-SB
		Red/Yellow	140MT (all) 140UT- D	140MT-SY
	Extension Shaft • Cut to required length for mounting depth (front of DIN Rail to front of enclosure door) • 140MT-F devices have a max length of 3 in. (7.62 cm)	12 in. (30.48 cm)	140MT-SB, 140MT-SY	140MT-S1
		21 in. (53.34 cm)	140MT-SB, 140MT-SY	140MT-S2
	Coupler • Included with Cat. Nos. 140MT-C-DN66 and 140MT-C-DRY66		140MT (all) 140UT- D	140MT-C-DNC
	Extension Shaft Support • Provides consistent alignment of the 140MT-C-DS and 140MT-C-DSL shafts with the 140MT-C-DN66 or 140MT-C-DRY66 door coupling handles • Recommended for shaft lengths >200 mm (7.9 in.) • Snaps on the right side of the 140MT-C, -D, -F, or 140UT-D device and allows the addition of one side-mounted auxiliary contact • Width: 9 mm (0.35 in.) • For use with screw-mounted or hat rail mounted devices		140MT (all) 140UT- D	140MT-C-SHS
	Legend Plate	Marking: "Hauptschalter" and "Main Switch"	140MT-C-DN66	140MT-C-DFCN
		Marking: "Not-Aus" and "Emergency Off"	140MT-C-DRY66	140MT-C-DFCRY
	Screw Adapter • For screw arrangement of a motor protection circuit breaker • Must be ordered in multiples of 10 (10 pieces/pkg)		140MT-C, D 140UT- D	140MT-C-N45
			140MT-F	140MT-F-N45

Table 39 - Modules and Adapters

	Description	Rating	For Use With	Cat. No.
	ECO Connecting Module • For direct-on-line (DOL) and reversing starters • Eco-starters mount on single DIN Rail (140MT on DIN Rail) • Electrical and mechanical interconnection of 140MT and 100-K contactors	12 A (IEC), 11 A (UL)	140MT-C to 100-K	140MT-C-PEK12
	ECO Connecting Module • Eco-starters mount on single DIN Rail (140MT on DIN Rail) • Electrical and mechanical interconnection of 140MT MPCB and 100-E contactors	18 A (IEC), 17 A (UL)	140MT-C to 100(S)-E09...16 ⁽¹⁾	140MT-C-PE16
			140MT-C to 100(S)-E09QJ...16QJ	140MT-C-PSE16
			140MT-D to 100(S)-E09...16 ⁽¹⁾	140MT-D-PE16
			140MT-D to 100(S)-E09QJ...16QJ	140MT-D-PSE16
	ECO Connecting Module • Eco-starters mount on single DIN Rail (140MT on DIN Rail) • Electrical and mechanical interconnection of 140MT MPCB and 100-C contactors	23 A (IEC), 22 A (UL)	140MT-C to 100-C09...C23	140MT-C-PEC23
			140MT-D to 100-C09...C23	140MT-D-PEC23
	ECO Connecting Module • Eco-starters mount on single DIN Rail (140MT on DIN Rail) • Electrical and mechanical interconnection of 140MT MPCB and 100-E contactors	30 A (IEC), 30 A (UL)	140MT-D to 100-C30...C37	140MT-D-PEC37
			140MT-C to 100(S)-E26...38 ⁽¹⁾	140MT-C-PE38
			140MT-C to 100(S)-E26QJ...38QJ	140MT-C-PSE38
			140MT-D to 100(S)-E26...38 ⁽¹⁾	140MT-D-PE38
	Connecting Module • Contactor and MPCB MUST BE mounted separately on (2) DIN Rails • Electrical interconnection of 140MT and 100-C contactors • Compatible contactor coil types: - AC (all) - 12V DC - 24V DC Electronic	23 A (IEC), 30 A (UL) and 30 A (IEC), 30 A (UL)	140MT-C to 100-C09...C23	140MT-C-PNC23
			140MT-D to 100-C09...C23	140MT-D-PNC23
			140MT-D to 100-C30...C37	140MT-D-PNC37
	Connecting Module • Contactor and MPCB MUST BE mounted separately on (2) DIN Rails • Electrical interconnection of 140MT-F and 100-C contactors	38 A (IEC), 34 A (UL)	140MT-F to 100-C30...C37	140MT-F-PNC37
		45 A	140MT-F to 100-C43...C55	140MT-F-PNC55
	Connecting Module • Contactor and MPCB MUST BE mounted separately on (2) DIN Rails • Electrical interconnection of 140MT-F and 100-E contactors	38 A (IEC), 34 A (UL)	140MT-F to 100-E26...E38	140MT-F-PNE38
		45 A	140MT-F to 100-E40...E65	140MT-F-PNE65
	Coil Extension Modules • Provides access to coil terminals on 3-component starters • 140MT-F-PSC43 fits ONLY on 140MT-C and 140MT-D MPCBs	100-C09...C23 contactors		140MT-C-PSC23
		100-C30...C37 contactors		140MT-F-PSC43
	Spacing Adapter • Required for self-protected combination motor controller (Type E) applications of Bul. 140MT-C, -D, and -F MPCBs. Not for use with bus bars.	140MT-C, -D		140MT-C-TE
		140MT-F		140MT-F-TE

(1) Not suitable for 100(S)-E09...38QJ or 300(S)-T0...B0QJ contactors.

Table 40 - Other Accessories

	Description	For Use With	Cat. No.
	Feeder Block for Compact Busbar • Supply of compact busbars • Increases terminal capacity	140MT-C, -D with 140MT-KBH adapter	140MT-C-WBE
		140MT-F	140MT-F-WBE

Table 40 - Other Accessories (Continued)




	Description		For Use With	Cat. No.
	Feeder Terminal for Compact Busbar - For supply of compact busbars - Top feed — overlaps compact busbar - Meets UL Type E spacing requirements	64 A	140MT-C, -D	140MT-C-WTEN
		160 A	140MT-C, -D, 14OUT-D	14OUT-D-WTE
	Three-phase Compact Busbar for MPCBs — 64 A Max Continuous Current 45 mm (1.77 in.) spacing - For use with front-mounted auxiliary contact	2 connections	140MT-C, -D	140MT-C-W452
		3 connections		140MT-C-W453
		4 connections		140MT-C-W454
		5 connections		140MT-C-W455
	Three-phase Compact Busbar for MPCBs — 64 A Max Continuous Current 54 mm (2.13 in.) spacing - For use with side-mounted auxiliary contact	2 connections	140MT-C, -D	140MT-C-W542
		3 connections		140MT-C-W543
		4 connections		140MT-C-W544
		5 connections		140MT-C-W545
	Three-phase Compact Busbar for 80 A MPCBs— 120 A Max. Continuous Current 55 mm (2.165 in.) spacing - For use with front-mounted auxiliary contact	2 connections	140MT-F	140MT-F-W552
		3 connections		140MT-F-W553
	Terminal Cover - For covering of unused compact bus bar terminals IP2X finger protection - Must be ordered in multiples of 10 10 pieces/pkg		140MT-C, -D	140MT-C-WSN
			140MT-F	140MT-F-WSN
	Top Hat Rail Adapter — 10 mm (0.39 in.) - Adjusts the depth of the 140MT-C to the 140MT-D - Allows the use of compact busbars across both frame sizes - Must be ordered in multiples of 10 10 pieces/pkg		140MT-C	140MT-KBH
	DIN (#3) symmetrical hat rail 35 mm x 7.5 mm x 1 m (1.4 x 0.3 x 39 in.) long 10 pieces/package		140MT (all) 14OUT-D	199-DR1
	DIN (#3) Symmetrical Rail 35 mm x 15 mm x 1 m (1.4 x 0.6 x 39 in.) long - Top Hat Rail (DIN #3 Symmetrical Rail) 5 pieces/package		140MT (all) 14OUT-D	1492-DR9
	Current Limiter - Operational voltage U_g: 690V - Rated impulse-withstand voltage U_{imp}: 6 kV - Thermal current I_{th} - IEC: 64 A - UL: 52 A		140MT-D, versions E and N 140ME	140MT-D-CL
	Plastic Enclosure - IP66, Type 4X - Chemical-resistant plastic construction	Red/yellow handle	140MT-C up to: 13 A (IEC) 16 A (UL)	140MT-C-ENRY
		Black/grey handle	140MT-C up to: 13 A (IEC) 16 A (UL)	140MT-C-ENN

Table 40 - Other Accessories (Continued)

	Description		For Use With	Cat. No.
	Label Sheet 105 self-adhesive paper labels each, 6 x 17 mm (0.236 x 0.67 in)	Pkg. qty. 10	140MT (all)	100-FMS
	Self-adhesive Markers 40 markers/card - Package qty. 5 cards	each label 6 x 15 mm (0.236 x 0.59 in)	140MT (all)	1492-MAS6X15
	Adhesive labels - White, halogen-free polyester, with acrylate adhesive - Ambient temperature range -40...+120 °C (-40...+248 °F) - Qty: 3000/roll	each label 6 x 17 mm (0.236 x 0.67 in)	140MT (all)	1492-MDM6X17-W
		each label 8 x 20 mm (0.315 x 0.787 in)	140MT (all)	1492-MDM8X20-W

Specifications

Table 41 - General Data

Attribute			140MT-C	140MT-D	140MT-F
Standards compliance		IEC	IEC/EN 60947-2, IEC/EN 60947-4-1		
		cULus	UL 60947-4-1, CSA C22.2, No. 60947-4-1		
Certifications		Regional	cULus Listed (File No. E54612, NLRV(7); E205542, NKJH(7); E518407		
			CCC, EAC, CE, IEC, CB Scheme		CCC, EAC, CE
Rated Insulation Voltage U_i	IEC	[V]	690		
	UL/CSA	[V]	600		
Rated Impulse Withstand Voltage U_{imp}	Pollution degree		3		
	Main circuits U_{imp} /Overvoltage Category		6 kV/III, 8 kV (Disconnect)		
	Auxiliary circuits U_{imp} /Overvoltage Category		6 kV/III		
Rated Frequency		[Hz]	45...65		
Utilization Category	IEC 60947-2 (Circuit breaker)		A		
	IEC 60947-4-1 (Motor starter)		AC-3		AC-3e
Life Span	Mechanical	[operations]	100,000		30,000
	Electrical (I_e max.)	[operations]	100,000		30,000
Switching Frequency		[operations/hour]	max. 25		—
Ambient Temperature	Storage	[°C (°F)]	-40...+85 (-40...+185)		
	Operation	[°C (°F)]	-25...+70 (-13...+158)		
Climatic resistance	Operating Humidity/Moisture heat (60068-2-3)		5...95% Non-condensing		
Site Altitude			to 2000 (6561)		
Protection Class			IP2X from all directions		
Resistance to Shock, Transport (60068-2-27)		ON	15 G/11 ms		
		OFF	30 G/11 ms		
Resistance to Vibration, Operation (60068-2-6)			2 G		
Rated Thermal Current I_{th}	up to 40 °C (104 °F) ambient temperature	[A]	0.1...32	0.63...40	9...45
	up to 60 °C (140 °F) ambient temperature	[A]	0.1...32	0.63...40	9...45
Rated Supply Current I_e		[A]	0.1...32	0.63...40	9...45
Dependence on Temperature	40 °C (104 °F)	[A]	no reduction		
	50 °C (122 °F)	[A]	no reduction		
	60 °C (140 °F)	[A]	no reduction		
	70 °C (158 °F)	[A]	15% current reduction of the upper rated current I_e		
Overload Protection Characteristics			IEC 60947-4-1 Motor protection (except Cat. Nos. 140MT-D9N, 140MT-F9N)		
Ambient Temperature Compensation		[°C (°F)]	-25...+60 (-13...+140)		
Phase-loss Protection			Differential release		
Trip class			10 (except Cat. No. 140MT-D9N and 140MT-F9N), fixed setting		
Magnetic Release			fixed setting		
Release current ($\pm 20\%$)	for E, N Version	[A]	14 x I_e max. ⁽¹⁾		15 x I_e max
	for E, N Version C36, C40	[A]	12 x I_e max. ⁽¹⁾		—
	for T Version	[A]	18...22 x I_e max. ⁽²⁾		19...22 x I_e max. ⁽²⁾
Total Power loss P_v	Circuit Breaker at rated load/operating temp.	[W]	4...11	4...14	8.5 (at 12 A)...12 (at 45 A)
Main Disconnect Switch Application			Yes, with accessories		

(1) I_e max. = maximum values of setting ranges fixed magnetic setting for 140MT-D9V; see ratings.(2) I_e max. = maximum values of setting ranges; see ratings.

Table 42 - Application Considerations

Device	Description
All 140MT devices	140MT-D...C36, -C40: Suitable for continuous operation at 90% current rating at 480V only if used in a minimum enclosure size of 250 x 175 x 150 mm (10 x 7 x 6 in).
	For utilization outside North America, assemblies (of products) shall comply to the IEC 61439-1 requirements
	140MT manual motor starters are intended for use in closed areas without hazardous operating conditions such as dust or explosive or corrosive gases. Enclosures of appropriate manner need to be in place to protect devices in such environments. See Table 43 .
Cat. No. 140MT-D9V	PWM frequency ≤ 4 kHz VFD output frequency 0...400 Hz Maximum cable length that is listed in the drive instruction manual applies. Adding a common mode core and utilizing XLPE cable helps minimize cable charging current.

Table 43 - Minimum Enclosure Size

Frame size	Rated Current [A]	Description	Application Type			
			480V Group Installation and At-motor Disconnect	600V Group Installation and At-motor Disconnect	480Y/277V Self-protected (Type E) Combination Motor Controller	600Y/347V Self-protected (Type E) Combination Motor Controller
140MT-C, -D	≤ 6.3	without accessories	[mm]	166 x 68 x 125	166 x 68 x 125	166 x 68 x 125
			[in]	6.5 x 2.7 x 5	6.5 x 2.7 x 5	6.5 x 2.7 x 5
		with accessories	[mm]	166 x 108 x 125	166 x 108 x 125	166 x 108 x 125
			[in]	6.5 x 4.25 x 5	6.5 x 4.25 x 5	6.5 x 4.25 x 5
	10...16	without accessories	[mm]	166 x 68 x 125	166 x 68 x 125	200 x 68 x 125
			[in]	6.5 x 2.7 x 5	6.5 x 2.7 x 5	7.9 x 2.7 x 5
		with accessories	[mm]	166 x 108 x 125	166 x 108 x 125	200 x 108 x 125
			[in]	6.5 x 4.25 x 5	6.5 x 4.25 x 5	7.9 x 4.25 x 5
	20...32	without accessories	[mm]	166 x 68 x 125	250 x 68 x 125	200 x 68 x 125
			[in]	6.5 x 2.7 x 5	10 x 2.7 x 5	7.9 x 2.7 x 5
		with accessories	[mm]	166 x 108 x 125	250 x 108 x 125	200 x 108 x 125
			[in]	6.5 x 4.25 x 5	10 x 4.25 x 5	7.9 x 4.25 x 5
	36...40	with or without accessories	[mm]	250 x 175 x 150	250 x 175 x 150	250 x 175 x 150
			[in]	10 x 7 x 6	10 x 7 x 6	10 x 7 x 6
140MT-F	9...45	with or without accessories	[mm]	272 x 162 x 290	272 x 162 x 290	272 x 162 x 290
			[in]	10.7 x 6.4 x 11.4	10.7 x 6.4 x 11.4	10.7 x 6.4 x 11.4

Table 44 - MPCB Connecting Characteristics

Connection			No. of Conductors	140MT-C, 140MT-D ≤ 16 A	140MT-C, 140MT-D > 16 A	140MT-F
Type of terminals						
				Screw Clamp up to 16 A, M4	Screw Clamp greater than 16 A, M4	—
Connection Screw				Pozidriv No. 2/Blade No. 3	Pozidriv No. 2/Blade No. 3	Pozidriv No. 2/Blade No. 3
Wiring	Solid or stranded 	1	1...6 mm ²	1.5...10 mm ²	1...50 mm ²	
		2	1...2.5 mm ² 2.5...6 mm ²	1.5...4 mm ² 4...10 mm ²	1...35 mm ²	
	Flexible with ferrule (end sleeve) 	1	1...6 mm ²	1.5...10 mm ²	1...35 mm ²	
		2	1...2.5 mm ² 2.5...4 mm ²	1.5...4 mm ² 4...10 mm ²	1...35 mm ²	
	Finely stranded 	1	1.5...6 mm ²	2.5...10 mm ²	1.5...35 mm ²	
		2	1.5...4 mm ² 2.5...6 mm ²	2.5...6 mm ² 4...10 mm ²	1.5...35 mm ²	
	Cross section per UL/CSA solid, stranded 	1	No. 14...10 AWG	No. 14...8 AWG	No. 14...1 AWG	
		2	No. 14...10 AWG	No. 14...10 AWG No. 12...8 AWG	No. 14...2 AWG	
	Stripping length			10 mm (0.39 in.)	10 mm (0.39 in.)	15 mm (0.59 in.)
Tightening torques			[N·m]/[lb·in.]	2...2.5/18...22	2...2.5/18...22	3...3.5/27...30

Combination Ratings

Bulletin 140MT Devices with Bulletin 100-K Miniature IEC Contactors

Table 45 - UL 60947 Application Ratings, MPSDs and MCPs with Bulletin 100-K Miniature IEC Contactors

Cat. No.	UL 60947-4-1 Manual Motor Controller						UL 60947-4-1 Type F Type 1		
	Max. Fuse or Circuit Breaker per NEC [A]	Minimum Contactor Size ⁽¹⁾	Group Motor Installation		Motor Disconnect		Combination Motor Controller		
			Max Short-circuit Current [kA]		Max Short-circuit Current [kA]		Minimum Contactor Size ⁽¹⁾	Max Short-circuit Current [kA]	
			480V	600V	480V	600V		480Y/277V ⁽²⁾	600Y/347V ⁽²⁾
C-Frame, Adjustable Thermal/Fixed Magnetic (14 x I _n)									
140MT-C3E-A16	450	100-K05	65	50	65	50	100-K05	65	50
140MT-C3E-A25	450	100-K05	65	50	65	50	100-K05	65	50
140MT-C3E-A40	450	100-K05	65	50	65	50	100-K05	65	50
140MT-C3E-A63	450	100-K05	65	50	65	50	100-K05	65	50
140MT-C3E-B10	450	100-K05	65	50	65	50	100-K05	65	50
140MT-C3E-B16	450	100-K05	65	50	65	50	100-K05	65	50
140MT-C3E-B25	450	100-K05	65	30	65	30	100-K05	65	30
140MT-C3E-B40	450	100-K05	65	30	65	30	100-K05	65	30
140MT-C3E-B63	450	100-K05	65	30	65	30	100-K05	65	—
140MT-C3E-C10	450	100-K09	65	30	65	30	100-K09	65	—
140MT-C3E-C16	450	100-K12	30	30	30	30	100-K12	30	—
D-Frame, Adjustable Thermal/Fixed Magnetic (14 x I _n)									
140MT-D9E-A63	450	100-K05	65	50	65	50	100-K05	65	50
140MT-D9E-B10	450	100-K05	65	50	65	50	100-K05	65	50
140MT-D9E-B16	450	100-K05	65	50	65	50	100-K05	65	50
140MT-D9E-B25	450	100-K05	65	30	65	30	100-K05	65	30
140MT-D9E-B40	450	100-K05	65	30	65	30	100-K05	65	30
140MT-D9E-B63	450	100-K05	65	30	65	30	100-K05	65	30
140MT-D9E-C10	450	100-K09	65	30	65	30	100-K09	65	30
140MT-D9E-C16	450	100-K12	65	30	65	30	100-K12	65	30

(1) Similar for other contactor configurations (100-K, 104-K).

(2) For full voltage (delta) ratings above 277V or 347V, follow the NEC or CEC rules for group motor applications.

Table 46 - IEC 60947-4-1, Type 1 Coordination Ratings, MPSDs with Bulletin 100-K IEC Contactors

Cat. No.	415V	
	Max Short-circuit Current [kA]	Min Contactor Size ⁽¹⁾
C-Frame, Adjustable Thermal/Fixed Magnetic ($14 \times I_n$)		
140MT-C3E-A16	65	100-K05
140MT-C3E-A25	65	100-K05
140MT-C3E-A40	65	100-K05
140MT-C3E-A63	65	100-K05
140MT-C3E-B10	65	100-K05
140MT-C3E-B16	65	100-K05
140MT-C3E-B25	65	100-K05
140MT-C3E-B40	65	100-K05
140MT-C3E-B63	65	100-K05
140MT-C3E-C10	65	100-K09
140MT-C3E-C16	30	100-K12
D-Frame, Adjustable Thermal/Fixed Magnetic ($14 \times I_n$)		
140MT-D9E-A63	65	100-K05
140MT-D9E-B10	65	100-K05
140MT-D9E-B16	65	100-K05
140MT-D9E-B25	65	100-K05
140MT-D9E-B40	65	100-K05
140MT-D9E-B63	65	100-K05
140MT-D9E-C10	65	100-K09
140MT-D9E-C16	65	100-K12

(1) Similar for other contactor configurations (100-K, 104-K).

Bulletin 140MT Devices with Bulletin 100-C IEC Contactors

Table 47 - UL 60947 Type 1 Application Ratings, MPSDs with Bulletin 100-C IEC Contactors

Cat. No.	UL 60947-4-1 Manual Motor Controller						UL 60947-4-1 Type F, Type 1		
	Max. Fuse or Circuit Breaker per NEC [A]	Minimum Contactor Size ⁽¹⁾	Group Motor Installation		Motor Disconnect		Combination Motor Controller		
			Max Short-circuit Current [kA]		Max Short-circuit Current [kA]		Minimum Contactor Size ⁽¹⁾	Max Short-circuit Current [kA]	
			480V	600V	480V	600V		480V/277V ⁽²⁾	600V/347V ⁽²⁾
C-Frame, Adjustable Thermal/Fixed Magnetic (14 x I _N)									
140MT-C3E-A16	450	100-C09	65	50	65	50	100-C09	65	50
140MT-C3E-A25	450	100-C09	65	50	65	50	100-C09	65	50
140MT-C3E-A40	450	100-C09	65	50	65	50	100-C09	65	50
140MT-C3E-A63	450	100-C09	65	50	65	50	100-C09	65	50
140MT-C3E-B10	450	100-C09	65	50	65	50	100-C09	65	50
140MT-C3E-B16	450	100-C09	65	50	65	50	100-C09	65	50
140MT-C3E-B25	450	100-C09	65	30	65	30	100-C09	65	30
140MT-C3E-B40	450	100-C09	65	30	65	30	100-C09	65	30
140MT-C3E-B63	450	100-C09	65	30	65	30	100-C09	65	—
140MT-C3E-C10	450	100-C09	65	30	65	30	100-C09	65	—
140MT-C3E-C16	450	100-C12	30	30	30	30	100-C12	30	—
140MT-C3E-C20	450	100-C16	30	30	30	10	—	—	—
140MT-C3E-C25	450	100-C23	30	18	10	5	—	—	—
	450	100-C30	30	18	30	5	—	—	—
140MT-C3E-C29	450	100-C30	30	10	10	—	—	—	—
140MT-C3E-C32	450	100-C37	30	10	10	—	—	—	—
D-Frame, Adjustable Thermal/Fixed Magnetic (14 x I _N)									
140MT-D9E-A63	450	100-C09	65	50	65	50	100-C09	65	50
140MT-D9E-B10	450	100-C09	65	50	65	50	100-C09	65	50
140MT-D9E-B16	450	100-C09	65	50	65	50	100-C09	65	50
140MT-D9E-B25	450	100-C09	65	30	65	30	100-C09	65	30
140MT-D9E-B40	450	100-C09	65	30	65	30	100-C09	65	30
140MT-D9E-B63	450	100-C09	65	30	65	30	100-C09	65	30
140MT-D9E-C10	450	100-C09	65	30	65	30	100-C09	65	30
140MT-D9E-C16	450	100-C12	65	30	65	30	100-C12	65	30
140MT-D9E-C20	450	100-C23	65	30	65	30	100-C23	65	—
140MT-D9E-C25	450	100-C23	50	30	50	30	100-C23	50	—
140MT-D9E-C29	450	100-C30	50	30	50	30	100-C30	50	—
140MT-D9E-C32	450	100-C37	50	30	30	18	100-C37	30	—
140MT-D9E-C36	450	100-C37	30	30	30	18	100-C37	30	—
140MT-D9E-C40	450	100-C37	30	30	30	18	100-C37	30	—
F-Frame, Adjustable Thermal/Fixed Magnetic (15 x I _N)									
140MT-F9E-C12	600	100-C30	65	30	65	30	100-C30	65	30
140MT-F9E-C16	600	100-C30	65	30	65	30	100-C30	65	30
140MT-F9E-C20	600	100-C30	65	30	65	30	100-C30	65	30
140MT-F9E-C25	600	100-C30	65	30	65	30	100-C30	65	30
140MT-F9E-C32	600	100-C30	65	30	65	30	100-C30	65	30
140MT-F9E-C38	600	100-C37	65	30	65	30	100-C37	65	30
140MT-F9E-C45	600	100-C43	65	30	65	30	100-C43	65	30

(1) Similar for other contactor configurations (100-C, 104-C, 100S-C, 104S-C).

(2) For full-voltage (delta) ratings above 277V or 347V, follow the NEC or CEC rules for group motor applications.

Table 48 - UL 60947 Type 1 Application Ratings, MCPs with Bulletin 100-C IEC Contactors

Cat. No.	UL 60947-4-1 Manual Motor Controller						Overload Relay
	Max. Fuse or Circuit Breaker per NEC [A]	Minimum Contactor Size	Group Motor Installation		Motor Disconnect		
			Max Short-circuit Current [kA]		Max Short-circuit Current [kA]		
			480V	600V	480V	600V	
D-Frame, Motor Circuit Protectors, Fixed Magnetic (14 x I _n)							
140MT-D9N-A16	450	100-C09	65	50	65	50	—
140MT-D9N-A25	450	100-C09	65	50	65	50	—
140MT-D9N-A40	450	100-C09	65	50	65	50	—
140MT-D9N-A63	450	100-C09	65	50	65	50	—
140MT-D9N-B10	450	100-C09	65	50	65	50	—
140MT-D9N-B16	450	100-C09	65	50	65	50	—
140MT-D9N-B25	450	100-C09	65	30	65	30	—
140MT-D9N-B40	450	100-C09	65	30	65	30	—
140MT-D9N-B63	450	100-C09	65	30	65	30	—
140MT-D9N-C10	450	100-C09	65	30	65	30	—
140MT-D9N-C16	450	100-C12	65	30	65	30	—
140MT-D9N-C20	450	100-C23	65	30	65	30	—
140MT-D9N-C25	450	100-C23	50	30	50	30	—
140MT-D9N-C29	450	100-C30	50	30	50	30	—
140MT-D9N-C32	450	100-C37	50	30	30	18	—
140MT-D9N-C36	450	100-C37	30	30	30	18	—
140MT-D9N-C40	450	100-C37	30	30	30	18	—
F-Frame, Motor Circuit Protectors, Fixed Magnetic (15 x I _n)							
140MT-F9N-C25	600	100-C30	65	30	65	30	193-1..., 193-E...FD
140MT-F9N-C32	600	100-C30	65	30	65	30	
140MT-F9N-C38	600	100-C37	65	30	65	30	
140MT-F9N-C45	600	100-C43	65	30	65	30	

Table 49 - UL 60947-4-1 Short-Circuit Current Ratings, 140MT Combination Motor Controller as Type F, Type 2 Combination with 100-C Contactors

Cat. No.	Current Range [A]	Contactor Size ⁽¹⁾	UL 60947-4-1 Type F, Type 2 Combination Motor Controller			
			Max Short-circuit Current [kA]		Max Current Rating [A]	
			480Y/277V	600Y/347V	Fuse	Circuit Breaker
C-Frame, Adjustable Thermal/Fixed Magnetic (14 x I _N)						
140MT-C3E-A16	0.10...0.16	100-C09	65	50	450	450
140MT-C3E-A25	0.16...0.25	100-C09	65	50	450	450
140MT-C3E-A40	0.25...0.40	100-C09	65	50	450	450
140MT-C3E-A63	0.40...0.63	100-C09	65	50	450	450
140MT-C3E-B10	0.63...1.0	100-C09	65	50	450	450
140MT-C3E-B16	1.0...1.6	100-C09	65	50	450	450
140MT-C3E-B25	1.6...2.5	100-C23	65	30	450	450
140MT-C3E-B40	2.5...4.0	100-C30	65	30	450	450
140MT-C3E-B63	4.0...6.3	100-C30	65	—	450	450
140MT-C3E-C10	6.3...10	100-C30	65	—	450	450
140MT-C3E-C16	10...16	100-C30	30	—	450	450
D-Frame, Adjustable Thermal/Fixed Magnetic (14 x I _N)						
140MT-D9E-A63	0.40...0.63	100-C09	65	50	450	450
140MT-D9E-B10	0.63...1.0	100-C09	65	50	450	450
140MT-D9E-B16	1.0...1.6	100-C09	65	50	450	450
140MT-D9E-B25	1.6...2.5	100-C23	65	30	450	450
140MT-D9E-B40	2.5...4.0	100-C23	65	—	450	450
140MT-D9E-B40	2.5...4.0	100-C30	65	30	450	450
140MT-D9E-B63	4.0...6.3	100-C30	65	30	450	450
140MT-D9E-C10	6.3...10	100-C30	65	30	450	450
140MT-D9E-C16	10...16	100-C30	65	30	450	450
140MT-D9E-C20	14.5...20	100-C30	65	—	450	450
140MT-D9E-C25	18...25	100-C30	50	—	450	450
140MT-D9E-C29	23...29	100-C30	50	—	450	450
140MT-D9E-C32	26.5...32	100-C37	30	—	450	450
140MT-D9E-C36	30...36	100-C37	30	—	450	450
140MT-D9E-C40	34...40	100-C37	30	—	450	450
140MT-D9E-C40	34...40	100-C43	30	—	450	450
D-Frame, Adjustable Thermal/Fixed Magnetic (18...22 x I _N)						
140MT-D9T-A63	0.40...0.63	100-C09	65	50	450	450
140MT-D9T-B10	0.63...1.0	100-C09	65	50	450	450
140MT-D9T-B16	1.0...1.6	100-C23	65	30	450	450
140MT-D9T-B25	1.6...2.5	100-C23	65	—	450	450
140MT-D9T-B25	1.6...2.5	100-C30	65	30	450	450
140MT-D9T-B40	2.5...4.0	100-C30	65	30	450	450
140MT-D9T-B63	4.0...6.3	100-C30	65	30	450	450
140MT-D9T-C10	6.3...10	100-C30	65	30	450	450
140MT-D9T-C16	10...16	100-C30	65	-	450	450
140MT-D9T-C20	14.5...20	100-C30	50	-	450	450
140MT-D9T-C25	18...25	100-C30	50	-	450	450

(1) Similar for other contactor configurations (100-C, 104-C, 100S-C, 104S-C).

Table 50 - IEC 60947-4-1, Type 2 Coordination Ratings, MPSDs with Bulletin 100-C IEC Contactors

Cat. No.			IEC 60947-4-1 Type 2 Coordination						Overload Relay
Standard Motor Protection	High Inrush Motor Protection	Motor Circuit Protection	400V		480V		600V		
			Max Short-circuit Current [kA]	Min Contactor Size ⁽¹⁾	Max Short-circuit Current [kA]	Min Contactor Size ⁽¹⁾	Max Short-circuit Current [kA]	Min Contactor Size ⁽¹⁾	
C-Frame, Adjustable Thermal/Fixed Magnetic (14 x I _n)									
140MT-C3E-A16	—	—	100	100-C09	—	—	—	—	—
140MT-C3E-A25	—	—	100	100-C09	—	—	—	—	—
140MT-C3E-A40	—	—	100	100-C09	—	—	—	—	—
140MT-C3E-A63	—	—	100	100-C09	—	—	—	—	—
140MT-C3E-B10	—	—	100	100-C09	—	—	—	—	—
140MT-C3E-B16	—	—	100	100-C09	—	—	—	—	—
140MT-C3E-B25	—	—	65	100-C23	—	—	—	—	—
140MT-C3E-B40	—	—	65	100-C23	—	—	—	—	—
140MT-C3E-B63	—	—	65	100-C23	—	—	—	—	—
140MT-C3E-C10	—	—	65	100-C23	—	—	—	—	—
140MT-C3E-C16	—	—	50	100-C30	—	—	—	—	—
140MT-C3E-C20	—	—	50	100-C30	—	—	—	—	—
140MT-C3E-C25	—	—	15	100-C30	—	—	—	—	—
140MT-C3E-C29	—	—	15	100-C30	—	—	—	—	—
140MT-C3E-C32	—	—	15	100-C30	—	—	—	—	—
D-Frame, Adjustable Thermal/Fixed Magnetic (14 x I _n)									
140MT-D9E-A63	—	—	100	100-C09	—	—	—	—	—
140MT-D9E-B10	140MT-D9T-A63	140MT-D9N-B10	100	100-C09	—	—	—	—	—
140MT-D9E-B16	140MT-D9T-B10	140MT-D9N-B16	100	100-C09	—	—	—	—	—
140MT-D9E-B25	140MT-D9T-B16	140MT-D9N-B25	100	100-C09	—	—	—	—	—
140MT-D9E-B40	140MT-D9T-B25	140MT-D9N-B40	65	100-C09	—	—	—	—	—
140MT-D9E-B63	140MT-D9T-B40	140MT-D9N-B63	65	100-C09	—	—	—	—	—
140MT-D9E-C10	140MT-D9T-B63	140MT-D9N-C10	65	100-C09	—	—	—	—	—
140MT-D9E-C16	140MT-D9T-C10	140MT-D9N-C16	65	100-C23	—	—	—	—	—
140MT-D9E-C20	140MT-D9T-C16	140MT-D9N-C20	65	100-C23	—	—	—	—	—
140MT-D9E-C25	140MT-D9T-C20	140MT-D9N-C25	65	100-C23	—	—	—	—	—
140MT-D9E-C29	140MT-D9T-C25	140MT-D9N-C29	65	100-C30	—	—	—	—	—
140MT-D9E-C32	140MT-D9T-C29	140MT-D9N-C32	65	100-C30/C37	—	—	—	—	—
140MT-D9E-C36	140MT-D9T-C32	—	65	100-C30/C37	—	—	—	—	—
140MT-D9E-C40	140MT-D9T-C36	140MT-D9N-C40	65	100-C30/C37	—	—	—	—	—
F-Frame, Adjustable Thermal/Fixed Magnetic (15 x I _n)									
140MT-F9E-C12	—	—	—	—	—	—	—	—	—
140MT-F9E-C16	—	—	65	100-C30	50	100-C30	10	100-C30	—
140MT-F9E-C20	—	—	65	100-C30	50	100-C30	10	100-C30	—
140MT-F9E-C25	—	—	65	100-C30	50	100-C30	10	100-C37	—
140MT-F9E-C32	—	—	65	100-C30	50	100-C30	10	100-C43	—
140MT-F9E-C38	—	—	65	100-C30	50	100-C37	10	100-C60	—
140MT-F9E-C45	—	—	65	100-C37	50	100-C43	10	100-C72	—
—	140MT-F9T-C25	—	65	100-C30	50	100-C30	10	100-C37	—
—	140MT-F9T-C32	—	65	100-C30	50	100-C30	10	100-C43	—
—	140MT-F9T-C38	—	65	100-C30	50	100-C37	10	100-C60	—
—	140MT-F9T-C45	—	65	100-C37	50	100-C43	10	100-C72	—
—	—	140MT-F9N-C25	65	100-C30	50	100-C30	10	100-C37	193-1E_ED 193-E_FD
—	—	140MT-F9N-C32	65	100-C30	50	100-C30	10	100-C43	
—	—	140MT-F9N-C38	65	100-C30	50	100-C37	10	100-C60	
—	—	140MT-F9N-C45	65	100-C37	50	100-C43	10	100-C72	

(1) Similar for other contactor configurations (100-C, 104-C, 100S-C, 104S-C).

Bulletin 140MT Devices with Bulletin 100-E IEC Contactors

Table 51 - UL 60947 Type 1 Application Ratings, MPSDs with Bulletin 100-E IEC Contactors

Cat. No.	UL 60947-4-1 Manual Motor Controller						UL 60947-4-1 Type F Type 1		
	Max. Fuse or Circuit Breaker per NEC [A]	Minimum Contactor Size ⁽¹⁾	Group Motor Installation		Motor Disconnect		Combination Motor Controller		
			Max Short-circuit Current [kA]		Max Short-circuit Current [kA]		Minimum Contactor Size ⁽¹⁾	Max Short-circuit Current [kA]	
			480V	600V	480V	600V		480V/277V ⁽²⁾	600V/347V ⁽²⁾
C-Frame, Adjustable Thermal/Fixed Magnetic (14 x I _N)									
140MT-C3E-A16	450	100-E09	65	50	65	50	100-E09	65	50
140MT-C3E-A25	450	100-E09	65	50	65	50	100-E09	65	50
140MT-C3E-A40	450	100-E09	65	50	65	50	100-E09	65	50
140MT-C3E-A63	450	100-E09	65	50	65	50	100-E09	65	50
140MT-C3E-B10	450	100-E09	65	50	65	50	100-E09	65	50
140MT-C3E-B16	450	100-E09	65	50	65	50	100-E09	65	50
140MT-C3E-B25	450	100-E09	65	30	65	30	100-E09	65	30
140MT-C3E-B40	450	100-E09	65	30	65	30	100-E09	65	30
140MT-C3E-B63	450	100-E09	65	30	65	30	100-E09	65	—
140MT-C3E-C10	450	100-E09	65	30	65	30	100-E09	65	—
140MT-C3E-C16	450	100-E12	30	30	30	30	100-E12	30	—
140MT-C3E-C20	450	100-E16	30	30	30	10	—	—	—
140MT-C3E-C25	450	100-E26	30	18	10	5	—	—	—
	450	100-E30	30	18	30	5	—	—	—
140MT-C3E-C29	450	100-E30	30	10	10	—	—	—	—
140MT-C3E-C32	450	100-E38	30	10	10	—	—	—	—
D-Frame, Adjustable Thermal/Fixed Magnetic (14 x I _N)									
140MT-D9E-A63	450	100-E09	65	50	65	50	100-E09	65	50
140MT-D9E-B10	450	100-E09	65	50	65	50	100-E09	65	50
140MT-D9E-B16	450	100-E09	65	50	65	50	100-E09	65	50
140MT-D9E-B25	450	100-E09	65	30	65	30	100-E09	65	30
140MT-D9E-B40	450	100-E09	65	30	65	30	100-E09	65	30
140MT-D9E-B63	450	100-E09	65	30	65	30	100-E09	65	30
140MT-D9E-C10	450	100-E09	65	30	65	30	100-E09	65	30
140MT-D9E-C16	450	100-E12	65	30	65	30	100-E12	65	30
140MT-D9E-C20	450	100-E26	65	30	65	30	100-E26	65	—
140MT-D9E-C25	450	100-E26	50	30	50	30	100-E26	50	—
140MT-D9E-C29	450	100-E30	50	30	50	30	100-E30	50	—
140MT-D9E-C32	450	100-E38	50	30	30	18	100-E38	30	—
140MT-D9E-C36	450	100-E38	30	30	30	18	100-E38	30	—
140MT-D9E-C40	450	100-E38	30	30	30	18	100-E38	30	—
140MT-D9E-C40	450	100-E40	30	30	30	18	100-E40	30	—

(1) Similar for other contactor configurations (100-E, 104-E, 100S-E, 104S-E).

(2) For full-voltage (delta) ratings above 277V or 347V, follow the NEC or CEC rules for group motor applications.

Table 52 - UL 60947-4-1 Short-Circuit Current Ratings, 140MT Combination Motor Controller as Type F, Type 2 Combination with 100-E Contactors

Cat. No.	Current Range [A]	Contactor Size ⁽¹⁾	UL 60947-4-1 Type F, Type 2 Combination Motor Controller			
			Max Short-circuit Current [kA]		Max Current Rating [A]	
			480Y/277V	600Y/347V	Fuse	Circuit Breaker
C-Frame, Adjustable Thermal/Fixed Magnetic (14 x I _n)						
140MT-C3E-A16	0.10...0.16	100-E09	65	50	450	450
140MT-C3E-A25	0.16...0.25	100-E09	65	50	450	450
140MT-C3E-A40	0.25...0.40	100-E09	65	50	450	450
140MT-C3E-A63	0.40...0.63	100-E09	65	50	450	450
140MT-C3E-B10	0.63...1.0	100-E09	65	50	450	450
140MT-C3E-B16	1.0...1.6	100-E09	65	50	450	450
140MT-C3E-B25	1.6...2.5	100-E26	65	30	450	450
140MT-C3E-B40	2.5...4.0	100-E26	65	30	450	450
140MT-C3E-B63	4.0...6.3	100-E26	65	—	450	450
140MT-C3E-C10	6.3...10	100-E26	65	—	450	450
140MT-C3E-C16	10...16	100-E30	30	—	450	450
D-Frame, Adjustable Thermal/Fixed Magnetic (14 x I _n)						
140MT-D9E-A63	0.40...0.63	100-E09	65	50	450	450
140MT-D9E-B10	0.63...1.0	100-E09	65	50	450	450
140MT-D9E-B16	1.0...1.6	100-E09	65	50	450	450
140MT-D9E-B25	1.6...2.5	100-E26	65	30	450	450
140MT-D9E-B40	2.5...4.0	100-E26	65	—	450	450
		100-E30	65	30	450	450
140MT-D9E-B63	4.0...6.3	100-E26	65	—	450	450
		100-E30	65	30	450	450
140MT-D9E-C10	6.3...10	100-E26	65	—	450	450
		100-E30	65	30	450	450
140MT-D9E-C16	10...16	100-E26	65	—	450	450
		100-E30	65	30	450	450
140MT-D9E-C20	14.5...20	100-E26	65	—	450	450
140MT-D9E-C25	18...25	100-E26	50	—	450	450
140MT-D9E-C29	23...29	100-E26	50	—	450	450
140MT-D9E-C32	26.5...32	100-E38	30	—	450	450
140MT-D9E-C36	30...36	100-E38	30	—	450	450
140MT-D9E-C40	34...40	100-E38	30	—	450	450
		100-E40	30	—	450	450
D-Frame, Adjustable Thermal/Fixed Magnetic (18...22 x I _n)						
140MT-D9T-A63	0.40...0.63	100-E09	65	50	450	450
140MT-D9T-B10	0.63...1.0	100-E09	65	50	450	450
140MT-D9T-B16	1.0...1.6	100-E26	65	30	450	450
140MT-D9T-B25	1.6...2.5	100-E26	65	—	450	450
		100-E30	65	30	450	450
140MT-D9T-B40	2.5...4.0	100-E26	65	—	450	450
		100-E30	65	30	450	450
140MT-D9T-B63	4.0...6.3	100-E26	65	—	450	450
		100-E30	65	30	450	450
140MT-D9T-C10	6.3...10	100-E26	65	—	450	450
		100-E30	65	30	450	450
140MT-D9T-C16	10...16	100-E26	65	—	450	450
140MT-D9T-C20	14.5...20	100-E26	50	—	450	450
140MT-D9T-C25	18...25	100-E26	50	—	450	450

(1) Similar for other contactor configurations (100-C, 104-C, 100S-C, 104S-C).

Table 53 - IEC 60947-4-1, Type 2 Coordination Ratings, MPSDs with Bulletin 100-E IEC Contactors

Cat. No.		IEC 60947-4-1 Type 2 Coordination	
Standard Motor Protection	High Inrush Motor Protection	415V	
		Max Short-circuit Current [kA]	Min Contactor Size ⁽¹⁾
C-Frame, Adjustable Thermal/Fixed Magnetic (14 x I _n)			
140MT-C3E-A16	—	100	100-E09
140MT-C3E-A25	—	100	100-E09
140MT-C3E-A40	—	100	100-E09
140MT-C3E-A63	—	100	100-E09
140MT-C3E-B10	—	100	100-E09
140MT-C3E-B16	—	100	100-E09
140MT-C3E-B25	—	65	100-E26
140MT-C3E-B40	—	65	100-E26
140MT-C3E-B63	—	65	100-E26
140MT-C3E-C10	—	65	100-E26
140MT-C3E-C16	—	50	100-E26
140MT-C3E-C20	—	50	100-E26
140MT-C3E-C25	—	15	100-E30
140MT-C3E-C29	—	15	100-E30
140MT-C3E-C32	—	15	100-E30
D-Frame, Adjustable Thermal/Fixed Magnetic (14 x I _n)			
140MT-D9E-A63	—	100	100-E09
140MT-D9E-B10	—	100	100-E09
140MT-D9E-B16	—	100	100-E09
140MT-D9E-B25	—	100	100-E09
140MT-D9E-B40	—	65	100-E26
140MT-D9E-B63	—	65	100-E26
140MT-D9E-C10	—	65	100-E26
140MT-D9E-C16	—	65	100-E26
140MT-D9E-C20	—	65	100-E26
140MT-D9E-C25	—	65	100-E26
140MT-D9E-C29	—	65	100-E26
140MT-D9E-C32	—	65	100-E30
140MT-D9E-C36	—	65	100-E30
140MT-D9E-C40	—	66	100-E30
140MT-D9E-C40	—	65	100-E40
D-Frame, Adjustable Thermal/Fixed Magnetic (18...22 x I _n)			
—	140MT-D9T-A63	100	100-E09
—	140MT-D9T-B10	100	100-E09
—	140MT-D9T-B16	100	100-E09
—	140MT-D9T-B25	65	100-E26
—	140MT-D9T-B40	65	100-E26
—	140MT-D9T-B63	65	100-E26
—	140MT-D9T-C10	65	100-E26
—	140MT-D9T-C16	65	100-E26
—	140MT-D9T-C20	65	100-E26
—	140MT-D9T-C25	65	100-E26

(1) Similar for other contactor configurations (100-E, 104-E, 100S-E, 104S-E).

Accessory Specifications

Table 54 - Auxiliary Contact Specifications—For 140MT-C... and 140MT-D... Devices

Attribute			Front-mounted Auxiliary Contacts Cat. Nos. 140MT-C-AFA, -AFAR/ -AFAR10M10	Right Side-mounted Auxiliary Contacts Cat. No. 140MT-C-ASA	
Rated Thermal Current I_{th}	at 40 °C (104 °F) ambient temperature		[A]	5	10
	at 60 °C (140 °F) ambient temperature		[A]	4	6
Back-up Fuses gG, gL			[A]	10	10
General Use current			[A]	5	10
Rated insulation voltage U_i	IEC		[V]	250	690
	UL/CSA		[V]	240	600
Contact rating code designation (UL/CSA)			AC	B300	A600
			DC	R300	Q600
Rated Supply Current I_e	AC-15	24V	[A]	4	6
		120V	[A]	3	5
		240V	[A]	1.5	3
		415V	[A]	—	2
		690V	[A]	—	1
	DC-13	24V	[A]	1.2	2
		125V	[A]	0.22	0.55
		250V	[A]	0.11	0.27
		400V	[A]	—	0.15
		500V	[A]	—	0.13
Type of Terminals					
Recommended screwdriver			Pozidriv No. 2/Blade No. 3	Pozidriv No. 2/Blade No. 3	
Flexible with insulated ferrule 	1 or 2 conductors		0.5...1.5 mm ² /No. 18...14 AWG	0.5...2.5 mm ² /No. 18...14 AWG	
Flexible 	1 or 2 conductors		0.5...1.5 mm ² /No. 18...14 AWG	0.75...2.5 mm ² /No. 18...14 AWG	
Stranded per UL/CSA 	1 or 2 conductors		0.75...1.5 mm ² /No. 18...14 AWG	0.75...2.5 mm ² /No. 18...14 AWG	
Solid 	1 or 2 conductors		0.5...1.5 mm ² /No. 18...14 AWG	0.5...2.5 mm ² /No. 18...14 AWG	
Conductor steps			Max 2 conductor steps allowed	Max 2 conductor steps allowed	
Tightening torque			1...1.2 N•m/8.9...10.6 lb•in	1...1.2 N•m/8.9...10.6 lb•in1...1.2	

Table 55 - Auxiliary Contact Specifications—For 140MT-F... Devices

Attribute				Front-mounted Auxiliary Contacts		Right Side-mounted Auxiliary Contacts		
Rated Thermal Current I_{th}		at 40 °C (104 °F) ambient temperature	[A]	5		10		
		at 60 °C (140 °F) ambient temperature	[A]	4		6		
Back-up Fuses gG, gL			[A]	10		10		
General Use Current			[A]	5		10		
Rated Insulation Voltage U_i		IEC		AC	250		690	
		UL/CSA		DC	240		600	
Contact rating code designation (UL/CSA)			AC	B300		A600		
			DC	R300		Q600		
Rated Supply Current I_e		AC-15	24V	[A]	4		6	
			120V	[A]	3		6	
			240V	[A]	1.5		3	
			415V	[A]	—		2	
			690V	[A]	—		1	
		DC-13	24V	[A]	1.2		2	
			125V	[A]	0.22		0.55	
			250V	[A]	0.11		0.27	
			400V	[A]	—		0.15	
			500V	[A]	—		0.13	
Type of Terminals								
Recommended screwdriver				Pozidriv No. 2/Blade No. 3		Pozidriv No. 2/Blade No. 3		
Solid		1 or 2 conductors		0.5...1.5 mm ²		0.5...2.5 mm ²		
Flexible with ferrule		1 or 2 conductors		0.5...1.5 mm ²		0.5...2.5 mm ²		
Flexible with insulated ferrule		1 or 2 conductors		0.5...1.5 mm ²		0.5...1.5 mm ²		
Finely stranded		1 or 2 conductors		0.75...1.5 mm ²		0.75...2.5 mm ²		
Cross section per UL/CSA, solid or stranded		1 or 2 conductors		No. 18...14 AWG		No. 18...14 AWG		
Stripping length				9 mm (0.35 in.)		10 mm (0.39 in.)		
Conductor steps				max 2 allowed		max 2 allowed		
Tightening torque				1...1.2 N•m/8.9...10.6 lb•in		1...1.2 N•m/8.9...10.6 lb•in		
Degree of protection per IEC 60529				IP2X		IP2X		

Table 56 - Undervoltage and Shunt Trip Specifications—For 140MT-C..., 140MT-D... and 140MT-F... Devices

Attribute				Undervoltage Trip for Left-side Mounting Cat. No. 140MT-C-UX	Shunt Trip for Left-side Mounting Cat. No. 140MT-C-SN
Actuating Voltage	Pick-up		[V]	$0.85...1.1 \times U_s$	$0.7...1.1 \times U_s$
	Drop-out		[V]	$0.7...0.35 \times U_s$	$0.7...1.1 \times U_s$
Rated AC Control Voltage	140MT-C-UXK	50 Hz	[V AC]	24	—
		60 Hz	[V AC]	28	—
	140MT-C-UXD	50 Hz	[V AC]	110	—
		60 Hz	[V AC]	120	—
	140MT-C-UXF	50 Hz	[V AC]	220...230	—
		60 Hz	[V AC]	—	—
	140MT-C-UXA	50 Hz	[V AC]	—	—
		60 Hz	[V AC]	240...260	—
	140MT-C-UXN	50 Hz	[V AC]	380...400	—
		60 Hz	[V AC]	440...460	—
	140MT-C-UXB	50 Hz	[V AC]	415	—
		60 Hz	[V AC]	480	—
	140MT-C-SNK	50 Hz	[V AC]	—	24
		60 Hz	[V AC]	—	24...28
	140MT-C-SND	50 Hz	[V AC]	—	110
		60 Hz	[V AC]	—	120
	140MT-C-SNF	50 Hz	[V AC]	—	220...230
		60 Hz	[V AC]	—	—
	140MT-C-SNA	50 Hz	[V AC]	—	—
		60 Hz	[V AC]	—	240...260
	140MT-C-SNT	50 Hz	[V AC]	—	240
		60 Hz	[V AC]	—	277
	140MT-C-SNN	50 Hz	[V AC]	—	380...400
		60 Hz	[V AC]	—	440...460
	140MT-C-SNB	50 Hz	[V AC]	—	415
		60 Hz	[V AC]	—	480
	On-time			Continuous duty	Continuous duty
	Coil consumption	Pick-up	[VA/W]	14/10	14/10
		Hold-in	[VA/W]	4/2	4/2
Rated DC Control Voltage	140MT-C-SNZJ		[V DC]	—	24
	On-time			—	Max 5 s
	Coil consumption	Pick-up	[W]	—	50
Type of Terminals					
Recommended screwdriver				Pozidriv No. 2/Blade No. 3	Pozidriv No. 2/Blade No. 3
Solid		1 or 2 conductors		$0.5...2.5 \text{ mm}^2$	$0.5...2.5 \text{ mm}^2$
Flexible with ferrule		1 or 2 conductors		$0.5...2.5 \text{ mm}^2$	$0.5...2.5 \text{ mm}^2$
Flexible with insulated ferrule		1 or 2 conductors		$0.5...2.5 \text{ mm}^2$	$0.5...2.5 \text{ mm}^2$
Finely stranded		1 or 2 conductors		$0.75...2.5 \text{ mm}^2$	$0.75...2.5 \text{ mm}^2$
Cross section per UL/CSA, solid or stranded		1 or 2 conductors		No. 18...14 AWG	No. 18...14 AWG
Stripping length				10 mm (0.39 in.)	10 mm (0.39 in.)
Conductor steps				max 2 allowed	max 2 allowed
Tightening torque				$1...1.2 \text{ N}\cdot\text{m}/8.9...10.6 \text{ lb}\cdot\text{in}$	$1...1.2 \text{ N}\cdot\text{m}/8.9...10.6 \text{ lb}\cdot\text{in}$
Degree of protection per IEC 60529				IP2X	IP2X

Table 57 - Feeder Terminals

Description		IEC 60947, UL 60947/CAN/CSA-C22.2 No. 60947			
		Compact Busbar Feeder Terminal		Compact Busbar ⁽¹⁾	
		140MT-C-WTEN	140MT-F-WTE	140MT-C-W...	140MT-F-W55
Rated Thermal Current I_{th} at 60 °C (140 °F) ambient temperature	[A]	64	150	64	150
Type of Terminals					
Recommended screwdriver		Pozidriv No. 2/Blade No. 3			
Flexible with ferrule	1 conductor	2.5...25 mm ²	4...50 mm ²	—	—
Flexible without ferrule	1 conductor	2.5...25 mm ²	4...50 mm ²	—	—
Stranded	1 conductor	16...25 mm ² /No. 16...4 AWG	16...50 mm ² /No. 12...1/0 AWG	—	—
Solid	1 conductor	2.5...10 mm ² /No. 16...8 AWG	2.5...10 mm ² /No. 12...1/0 AWG	—	—
De-isolation (stripping) length	[mm (in)]	14 (0.55)	12 (0.47)	—	—
Tightening torque		3...3.5 N•m/27...31 lb•in	5...6 N•m/45...54 lb•in	—	—

(1) Rated thermal current is 57 A at 70 °C (158 °F) ambient temperature.

Table 58 - Feeder Blocks for Compact Busbars

Description		IEC 60947				UL 60947/CAN/CSA-C22.2 No. 60947			
		140MT-C-WBE		140MT-F-WBE		140MT-C-WBE		140MT-F-WBE	
		L1, L2, L3	T1, T2, T3	L1, L2, L3	T1, T2, T3	L1, L2, L3	T1, T2, T3	L1, L2, L3	T1, T2, T3
Rated Thermal Current I_{th} at 60 °C (140 °F) ambient temp.	[A]	64		120		64		120	
Type of Terminals									
Recommended screwdriver		Pozidriv No. 2/Blade No. 3							
Flexible with ferrule	1 conductor	4...35 mm ² No. 10...2 AWG	1...10 mm ² / No. 16...8AWG for use with 64 A and 92 A busbar	4...50 mm ²	for use with 140MT-F-W55	4...35 mm ² No. 10...2 AWG	1...10 mm ² / No. 16...8AWG for use with 64 A and 92 A busbar	4...50 mm ²	for use with 140MT-F-W55
Flexible without ferrule	1 conductor			4...50 mm ²	—			4...50 mm ²	—
Stranded	1 conductor			16...50 mm ² No. 12...1/0 AWG	—			16...50 mm ² No. 12...1/0 AWG	—
Solid	1 conductor			2.5...10 mm ² No. 12...8 AWG	—			2.5...10 mm ² No. 12...8 AWG	—
De-isolation (stripping) length	[mm (in)]	14 (0.55)	10 (0.39)	12 (0.47)	—	14 (0.55)	10 (0.39)	12 (0.47)	—
Tightening torque		3...3.5 N•m/ 27...31 lb•in	2...2.5 N•m/ 18...22 lb•in	5...6 N•m/ 45...54 lb•in	—	3...3.5 N•m/ 27...31 lb•in	2...2.5 N•m/ 18...22 lb•in	5...6 N•m/ 45...54 lb•in	—

Table 59 - Current Limiter

Description				140MT-D-CL	
Rated Operational voltage U_e				690V	
Rated impulse-withstand voltage U_{imp}				6 kV	
Thermal current I_{th}			IEC	64 A	
			UL	52 A	
Type of Terminals					
Recommended screwdriver				Pozidriv No. 2/Blade No. 3	
Flexible with ferrule	1 conductor			1.5...10 mm ² /No. 14...8 AWG	
	2 conductors			1.5...4 mm ² & 4...10 mm ² / No. 14...10 & 12...8 AWG	
Flexible without ferrule	1 conductor			2.5...10 mm ² /No. 14...8 AWG	
	2 conductors			2.5...6 mm ² & 4...10 mm ² / No. 14...10 & 12...8 AWG	
Stranded	1 conductor			1.5...10 mm ² /No. 14...8 AWG	
	2 conductors			1.5...4 mm ² & 4...10 mm ² / No. 14...10 & 12...8 AWG	
Solid	1 conductor			1.5...10 mm ² /No. 14...8 AWG	
	2 conductors			1.5...4 mm ² & 4...10 mm ² / No. 14...10 & 12...8 AWG	
De-isolation (stripping) length			[mm (in)]	10 (0.39)	
Tightening torque				2...2.5 N•m (18...22 lb•in)	
Short-circuit current rating Current Range	IEC 440...690V	1.6...16 A	140MT-C3E	15 kA	
			140MT-D9E/N	25 kA	
			140ME-D9	—	
		20...32 A	140MT-C3E	10 kA	
			140MT-D9E/N	25 kA	
			140ME-D9	—	
		36...40 A	140MT-C3E	—	
			140MT-D9E/N	25 kA	
			140ME-D9	—	
		0.25...16 A	140MT-C3E	—	
			140MT-D9E/N	—	
			140ME-D9	20 kA	
		10...40 A	140MT-C3E	—	
			140MT-D9E/N	—	
			140ME-D9	20 kA	
	UL 600V	2.5...40 A	140MT-C3E	—	
			140MT-D9E/N	50 kA	
			140ME-D9	—	
		20...40 A	140MT-C3E	—	
			140MT-D9E/N	30 kA (Type E)	
			140ME-D9	—	
		0.25...16 A	140MT-C3E	—	
			140MT-D9E/N	—	
			140ME-D9	50 kA	
		10...40 A	140MT-C3E	—	
			140MT-D9E/N	—	
			140ME-D9	30 kA	

Time-Current Characteristic

Figure 10 - Motor Protection Circuit Breakers Time-Current Characteristic, 140MT-C, -D... Devices


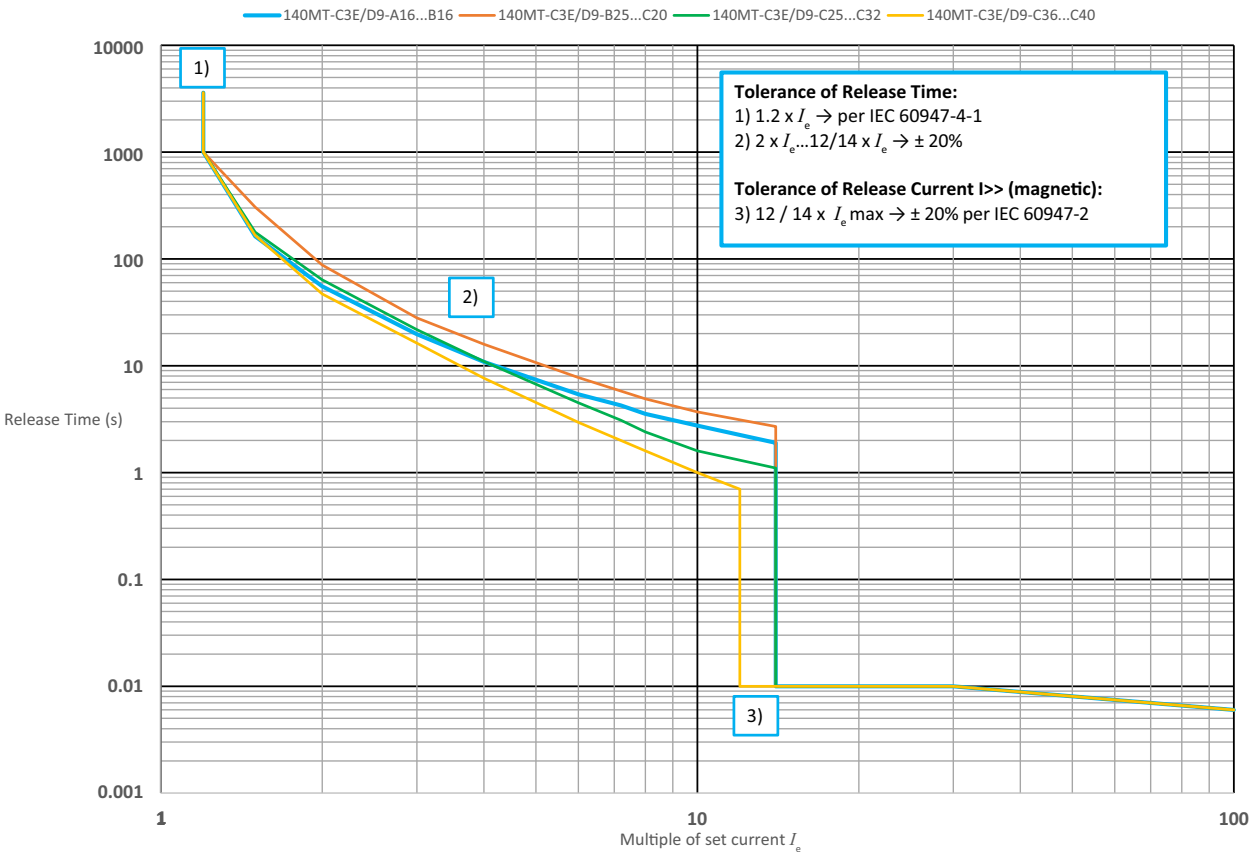


Figure 11 - Motor Protection Circuit Breakers Time-Current Characteristic, 140MT-F... Devices

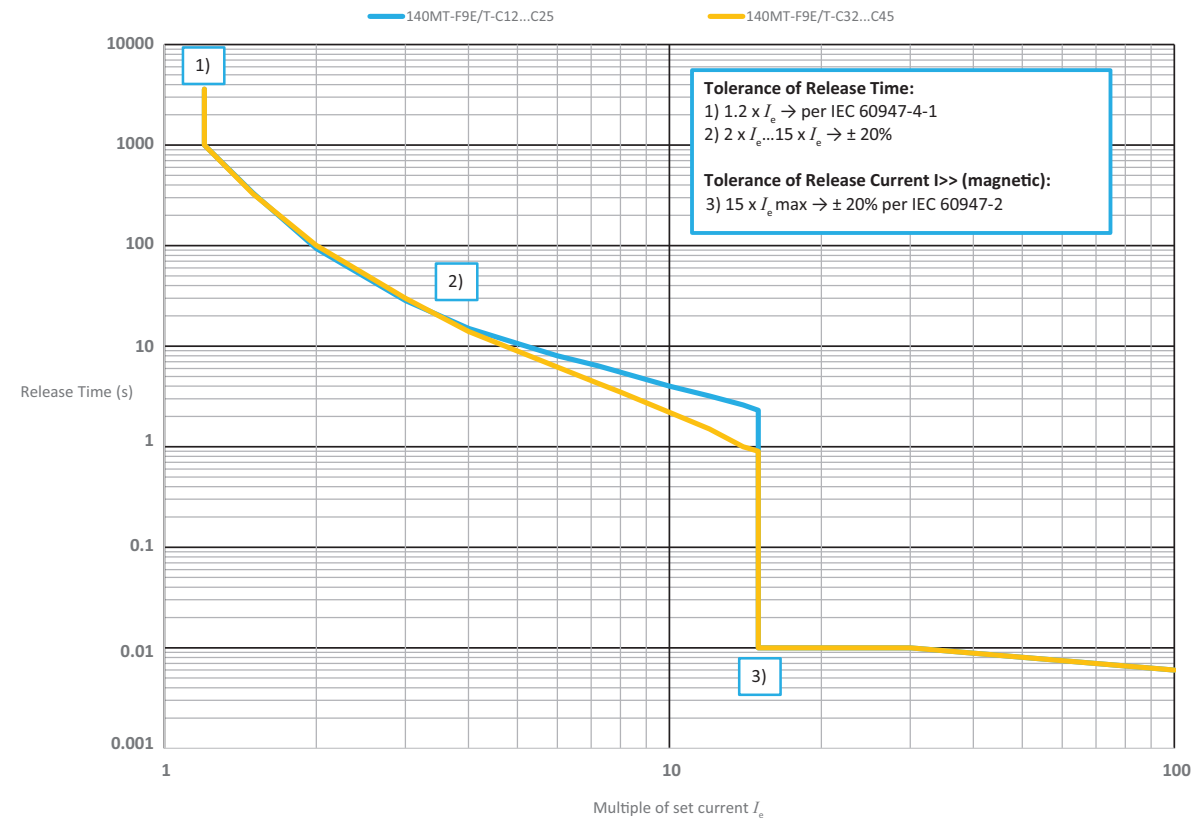

Thermal Release Trip Current

The adjustable current-dependent delayed bimetal release protects motors against overload. The curve shows the mean operating current at an ambient temperature of 20 °C (68 °F) starting from the cold state. Careful testing and setting ensures effective motor protection even in the case of single phasing. The overload characteristic is also valid for transformer protection.

Magnetic Release Trip Current

The instantaneous magnetic trip has a fixed operating current setting. This corresponds to 13...14 times the maximum value of the setting range. (Transformer protection up to 20 x I_e max.) At a lower setting, it is correspondingly higher.

Current Setting $I_e F$

The overload trip corresponds to a thermal overload relay in a motor starter conforming to IEC 60947-4-1. If a different value is prescribed (for example, reduced I_e for cooling medium having a temperature higher than 40 °C (104 °F) or a place of installation higher than 2000 m (6561 ft) above sea level), the setting current is equal to the reduced rated current I_e of the motor.

Let Through Current Characteristic Charts

Figure 12 - Max. Cut-off Current at U_e for 400V / 415V, 50 Hz for 140MT-C3E-*

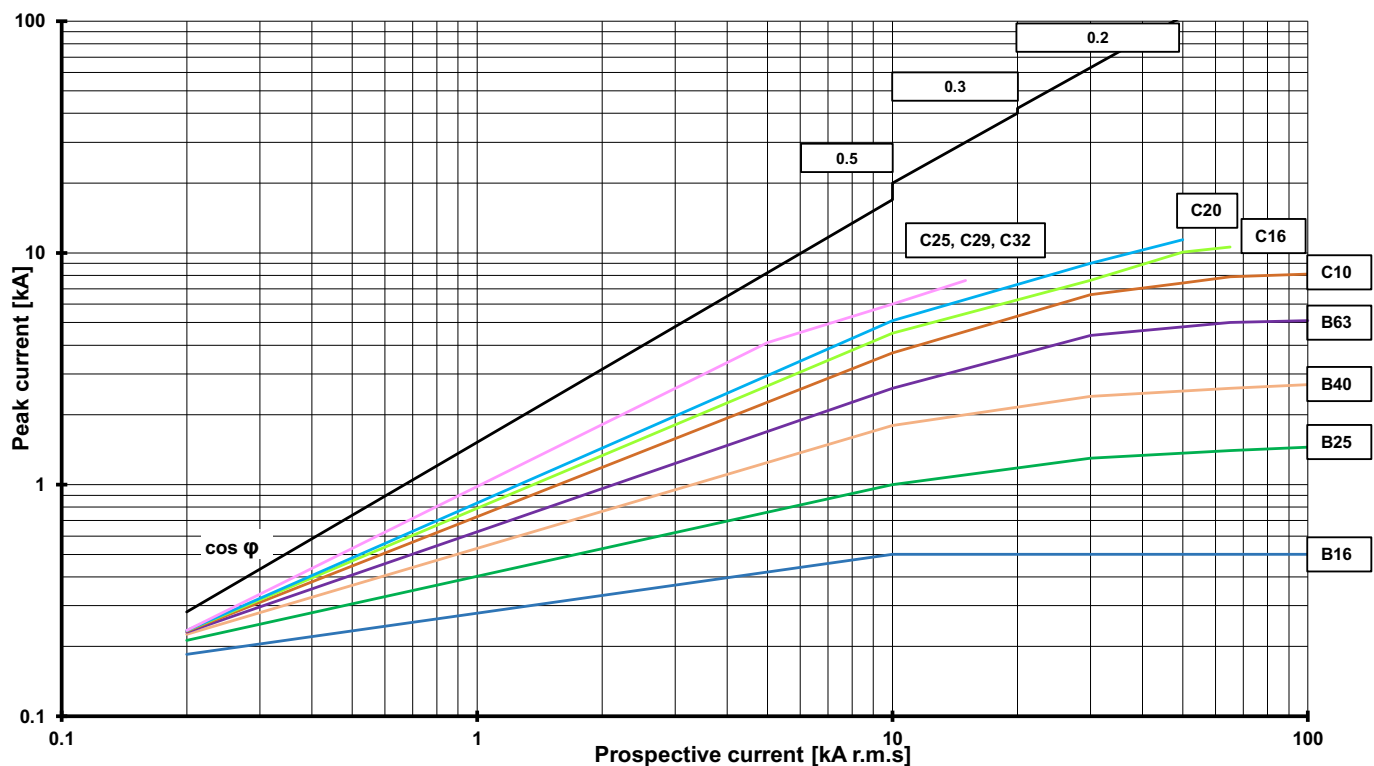


Figure 13 - Max. Let-through Energy at U_e for 400V / 415V, 50 Hz for 140MT-C3E-*

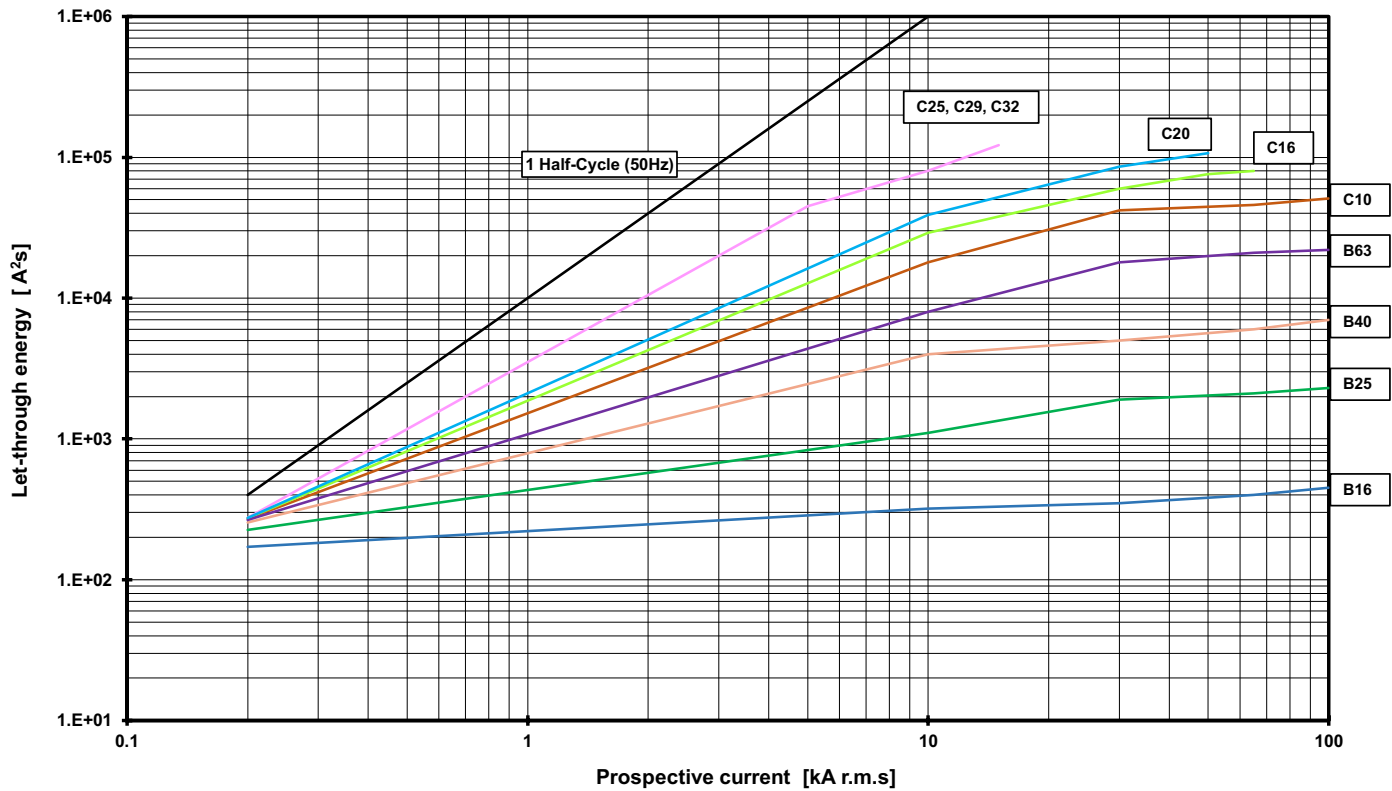


Figure 14 - Max. Cut-off Current at U_e for 400V / 415V, 50 Hz for 140MT-D9**

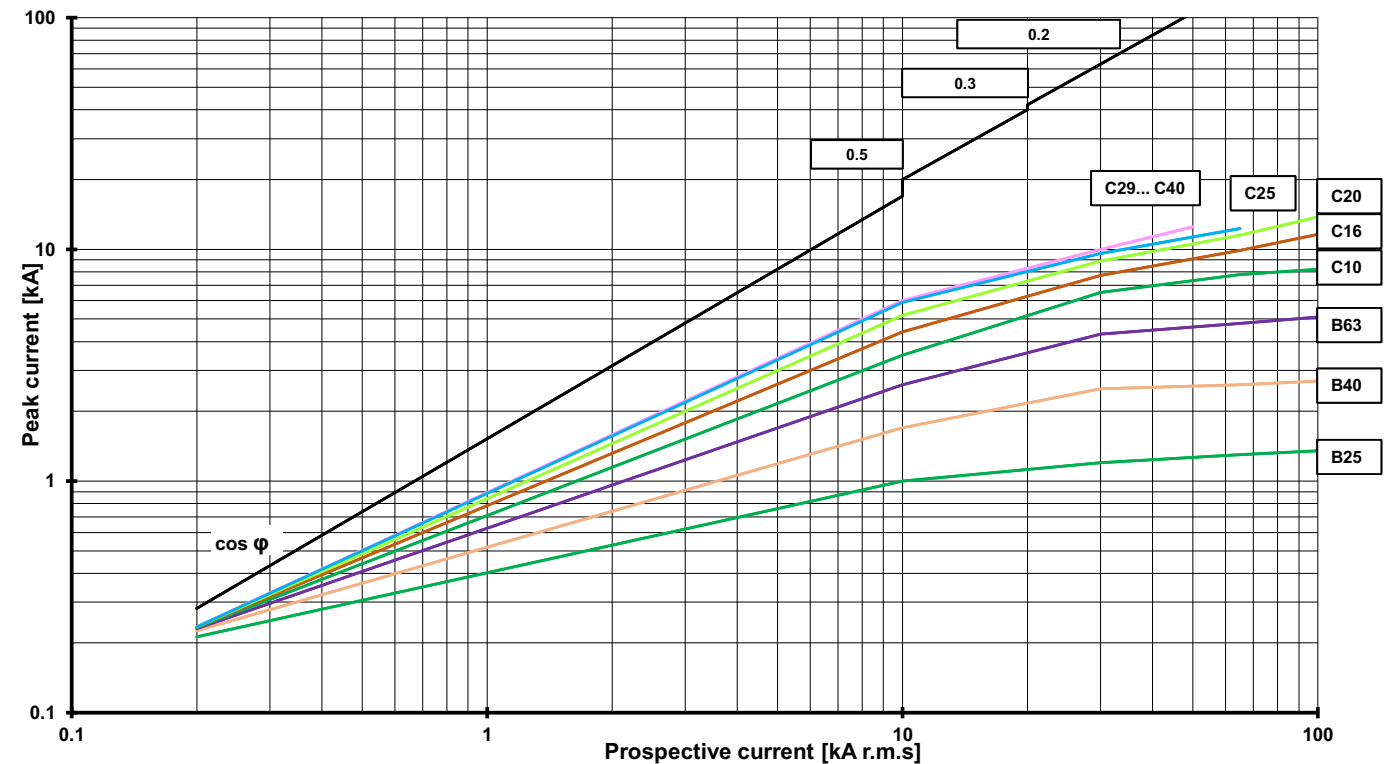


Figure 15 - Max. Let-through Energy at U_g for 400V / 415V, 50 Hz for 140MT-D9**

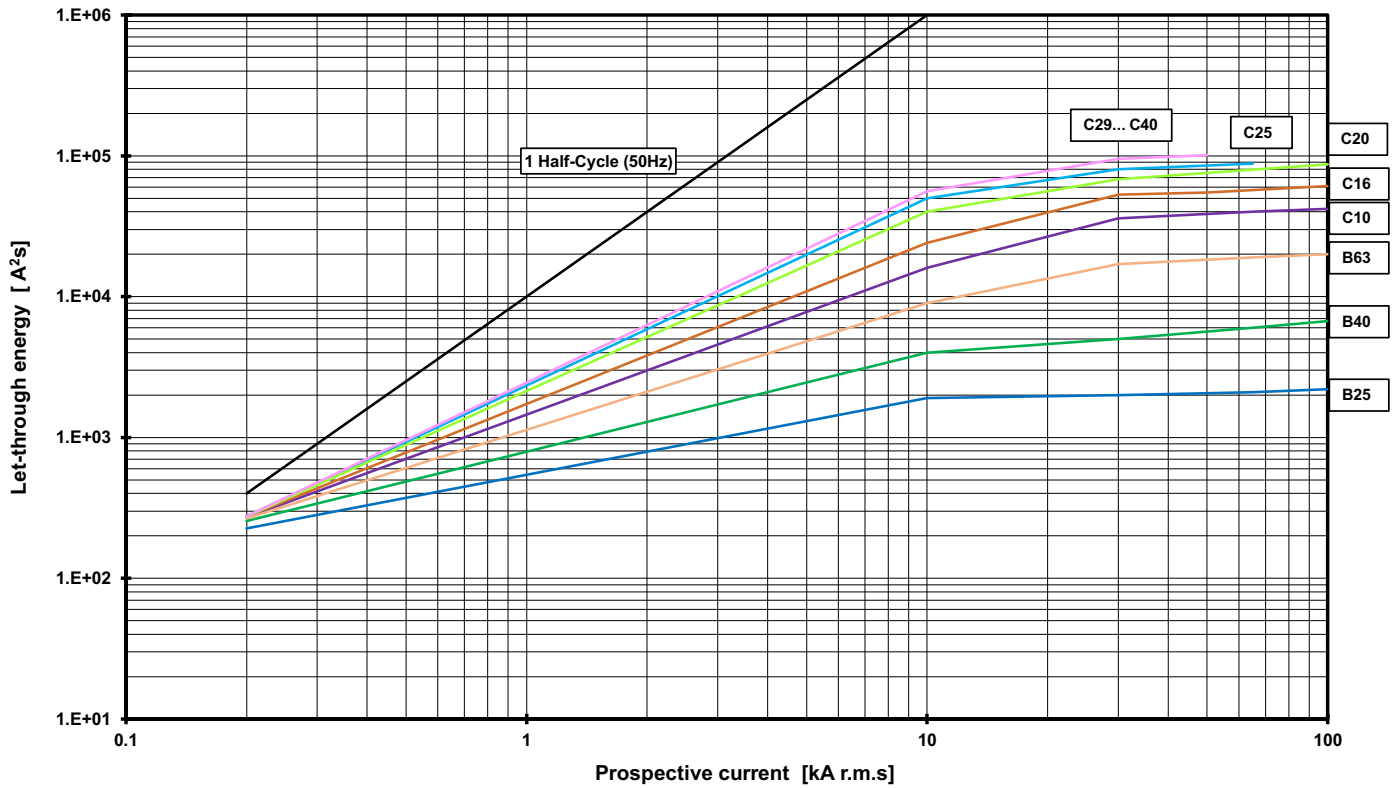


Figure 16 - Max. Cut-off Current at U_g for 480V, 50 Hz for 140MT-C3E-*

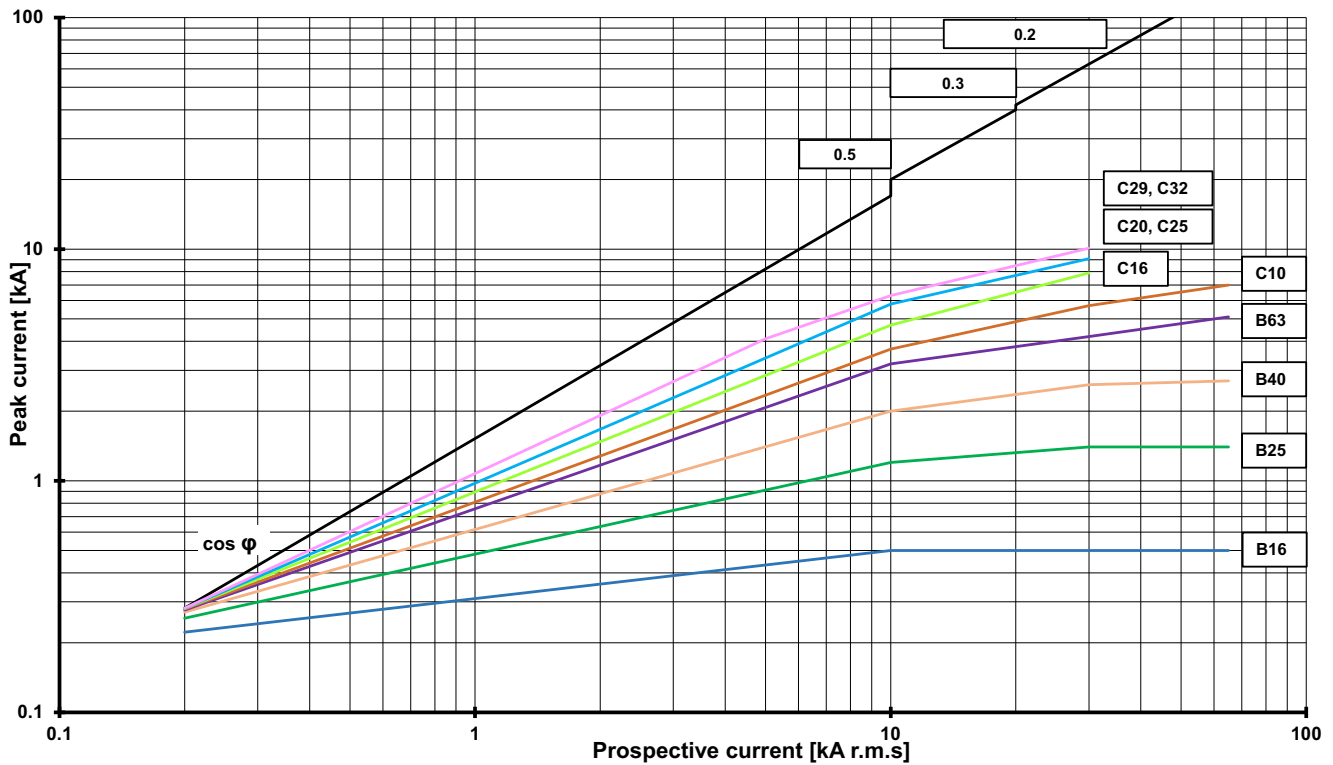


Figure 17 - Max. Let-through Energy at U_g for 480V, 50 Hz for 140MT-C3E-*

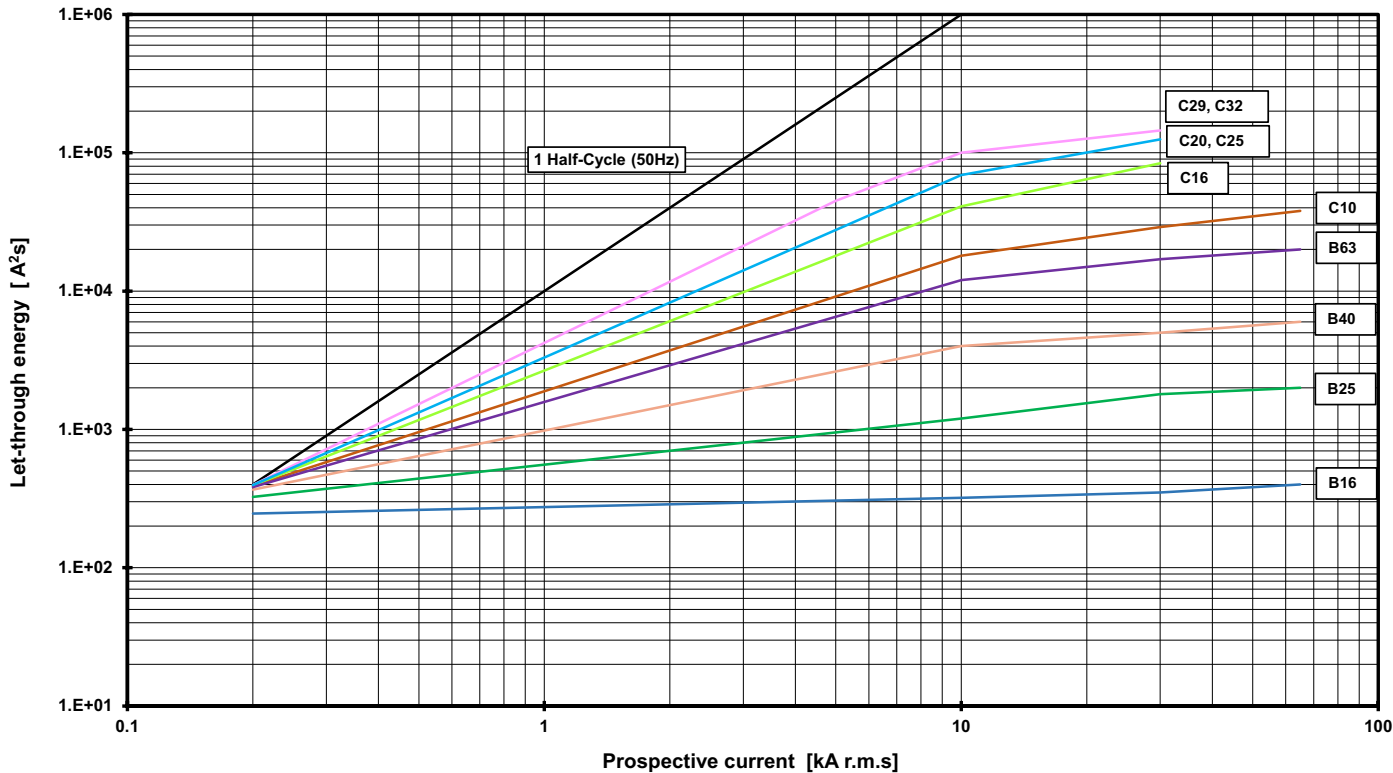


Figure 18 - Max. Cut-off Current at U_g for 480V, 50 Hz for 140MT-D9**

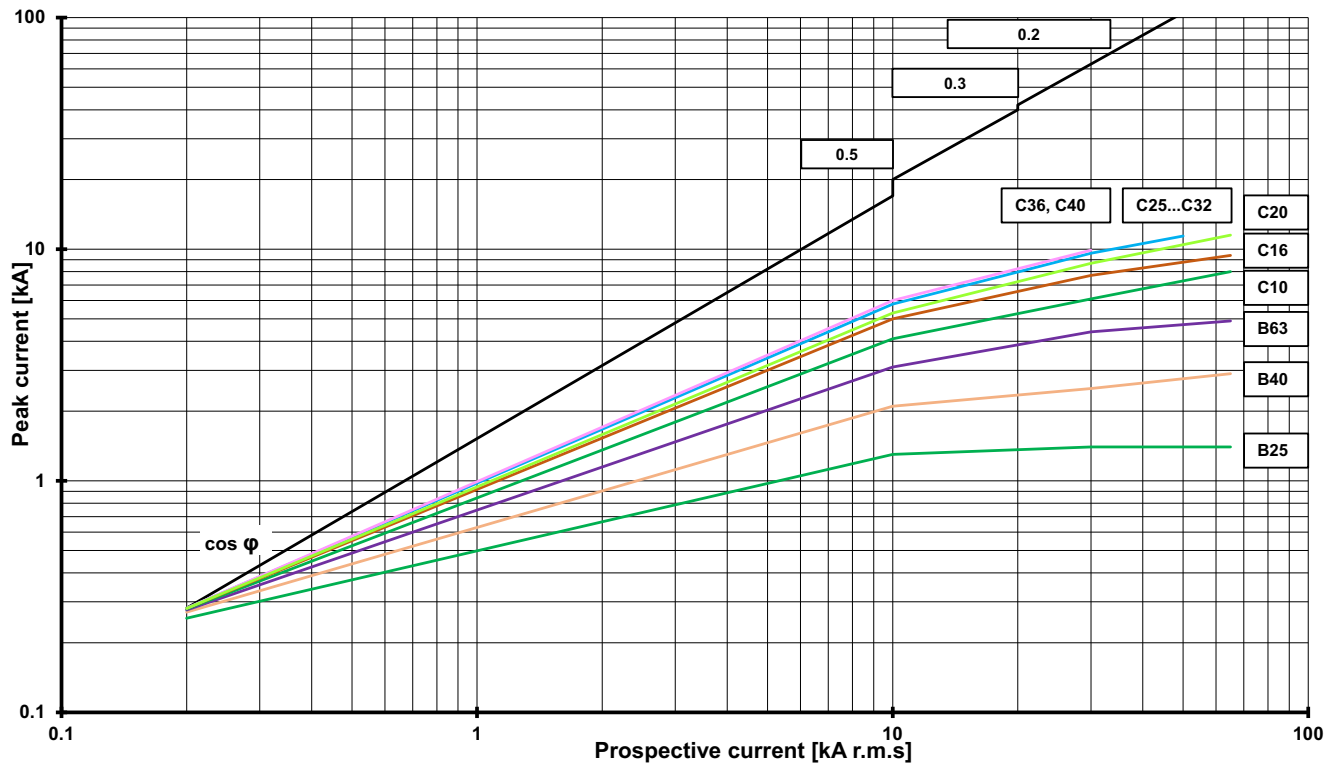


Figure 19 - Max. Let-through Energy at U_e for 480V, 50 Hz for 140MT-D9**

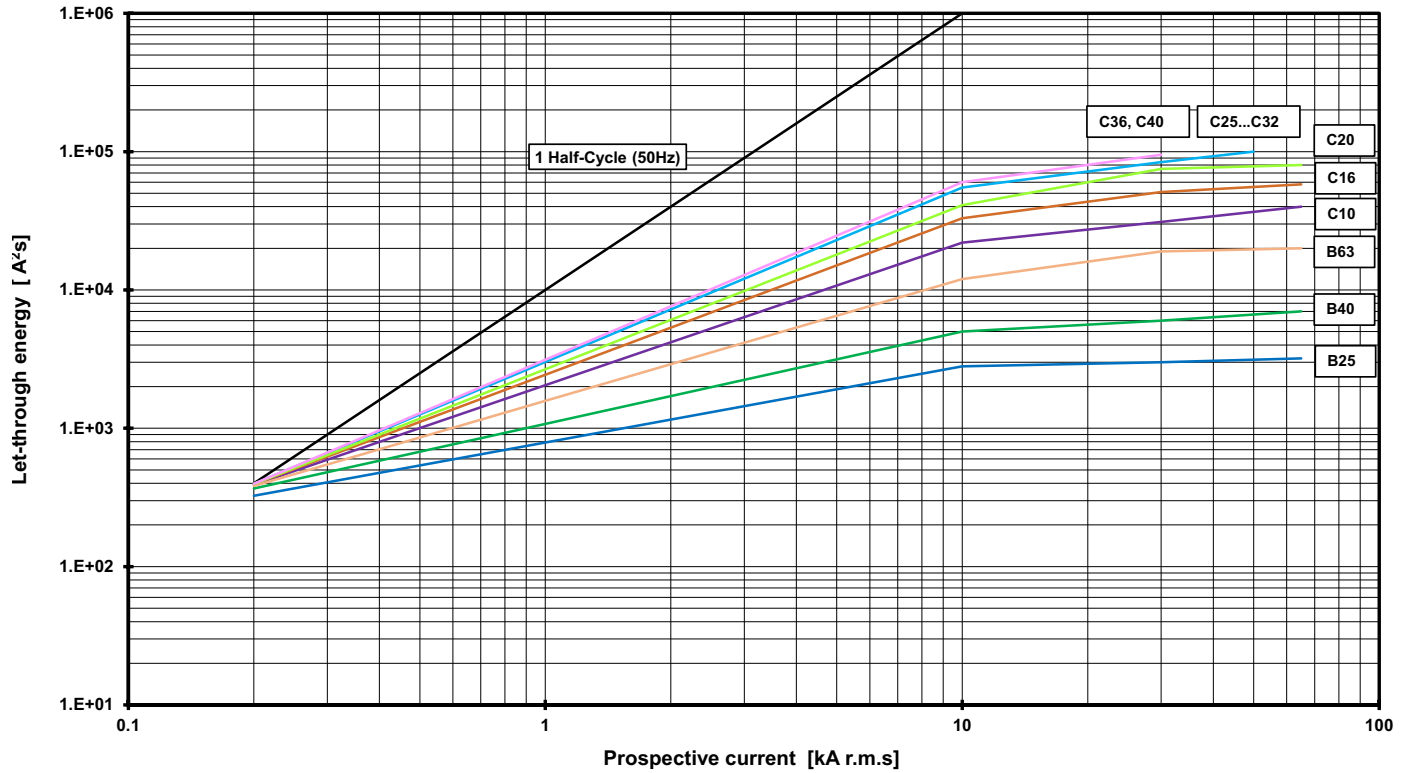


Figure 20 - Max. Cut-off Current at U_e for 600V, 50 Hz for 140MT-C3E-*

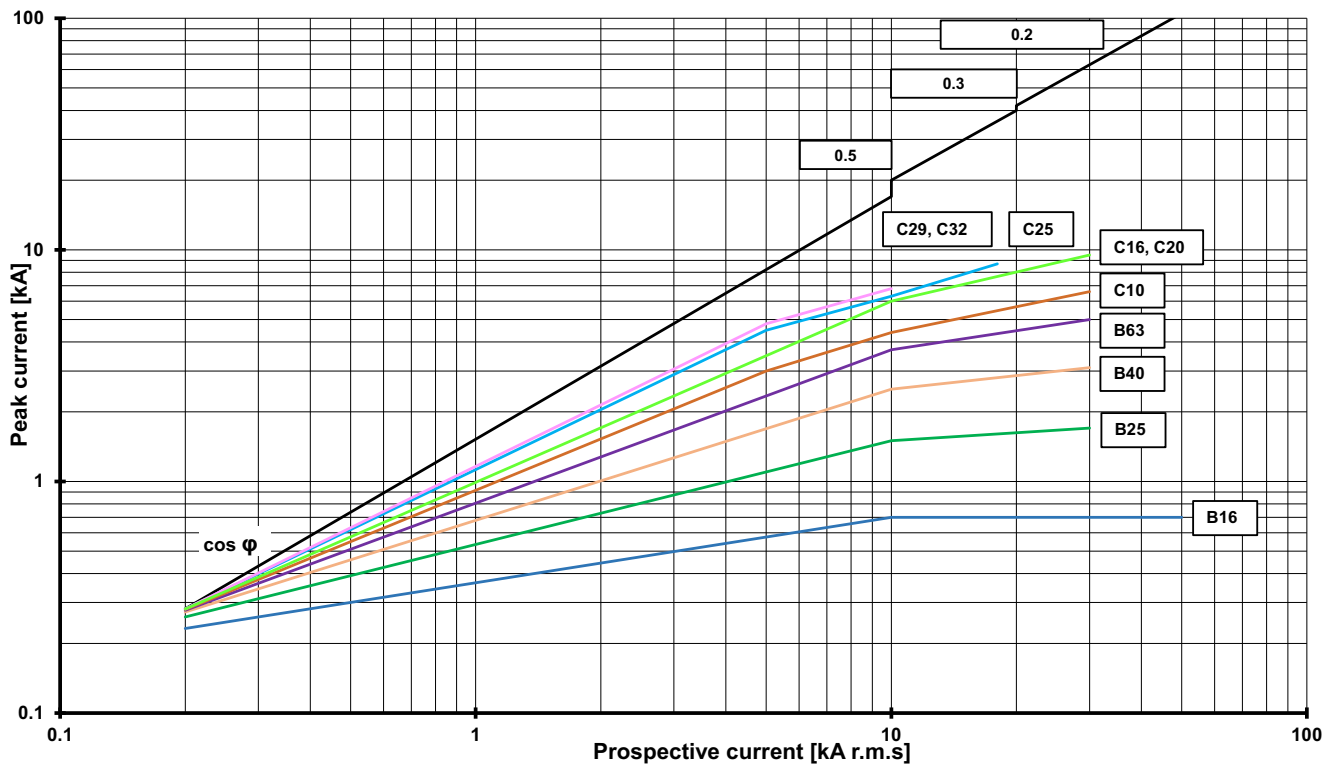


Figure 21 - Max. Let-through Energy at U_e for 600V, 50 Hz for 140MT-C3E-*

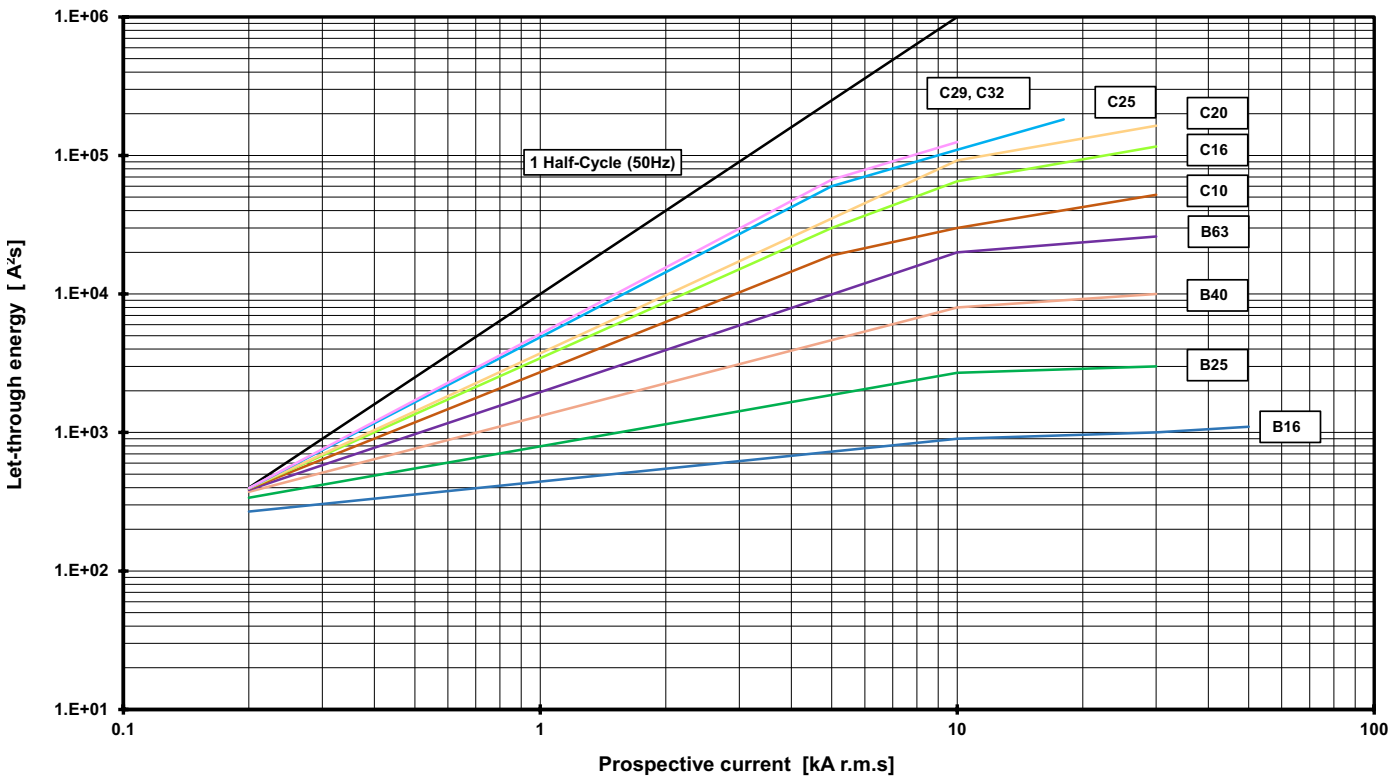


Figure 22 - Max. Cut-off Current at U_e for 600V, 50 Hz for 140MT-D9**

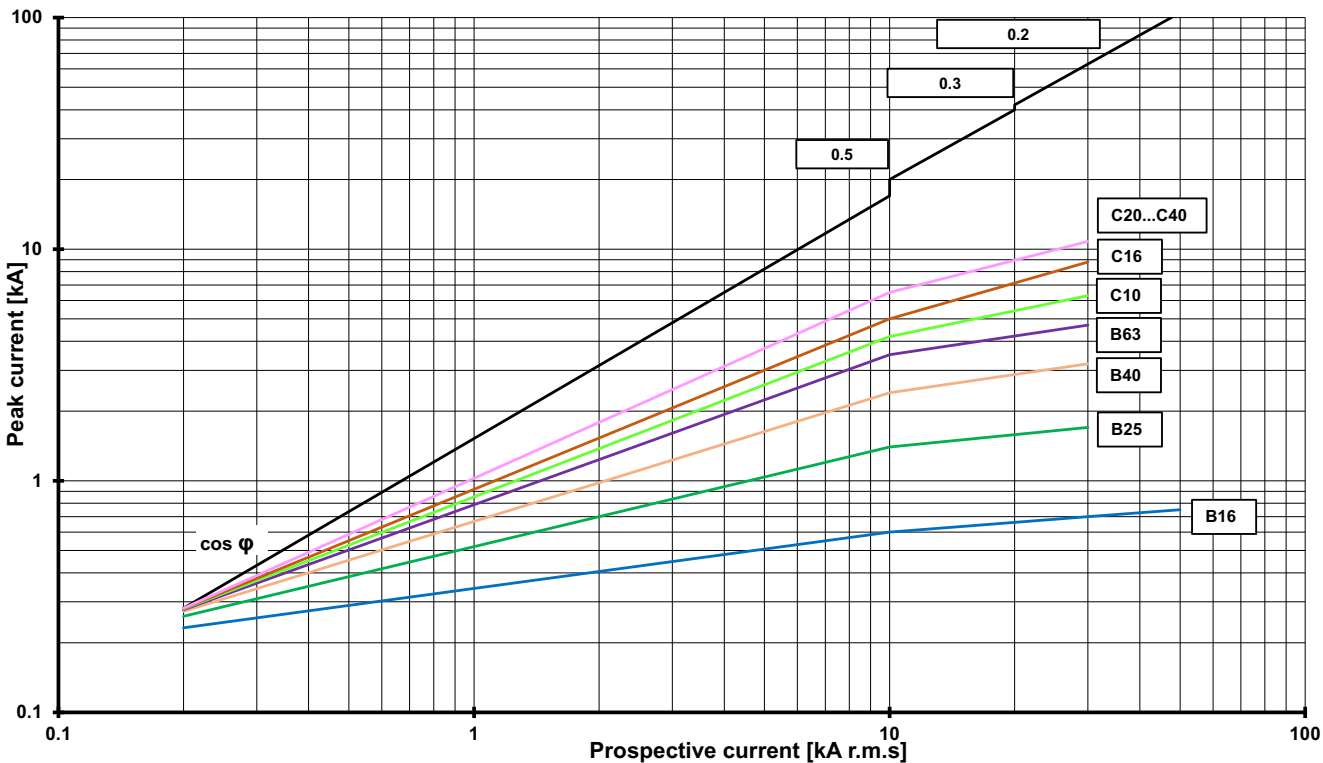


Figure 23 - Max. Let-through Energy at U_e for 600V, 50 Hz for 140MT-D9**

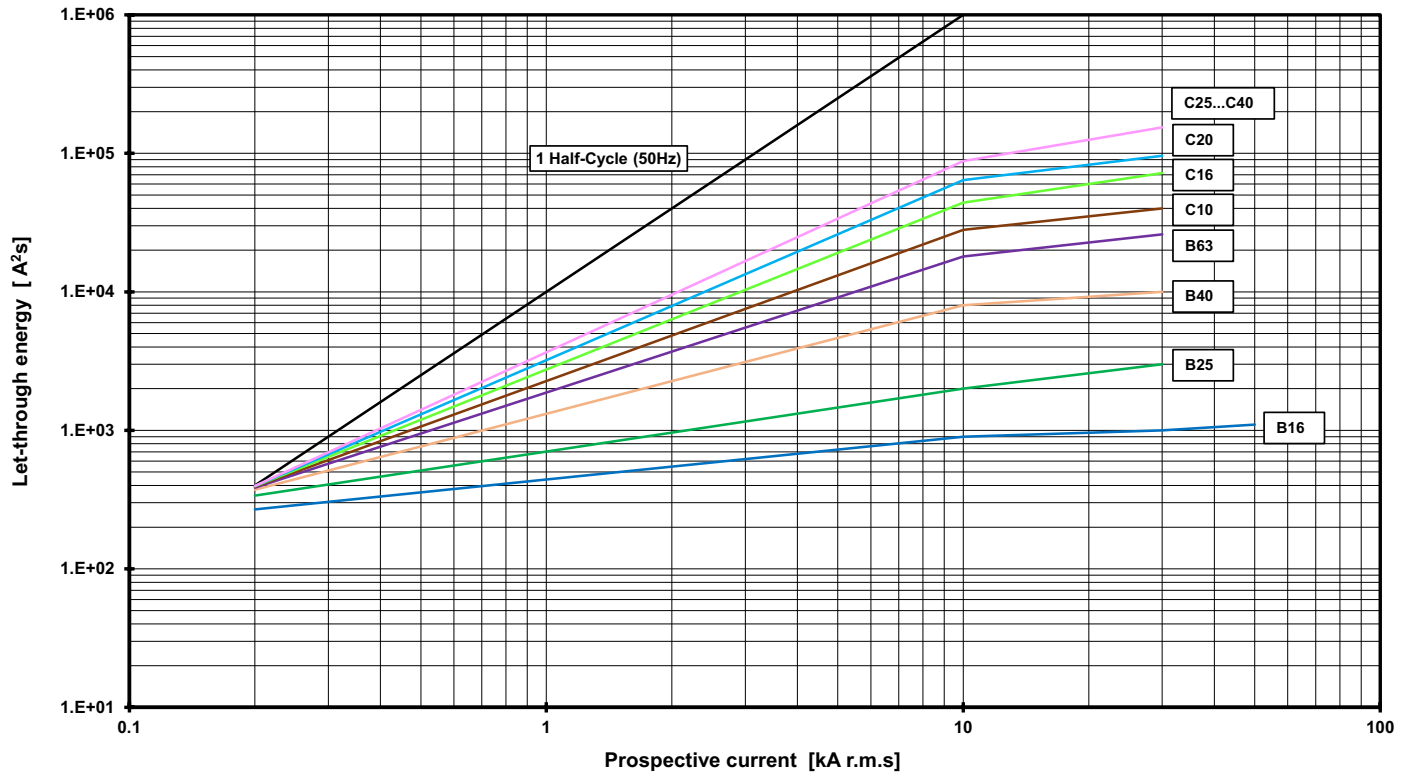


Figure 24 - Max. Cut-off Current at U_e for 480V, 50 Hz for 140MT-F9E/N/T*

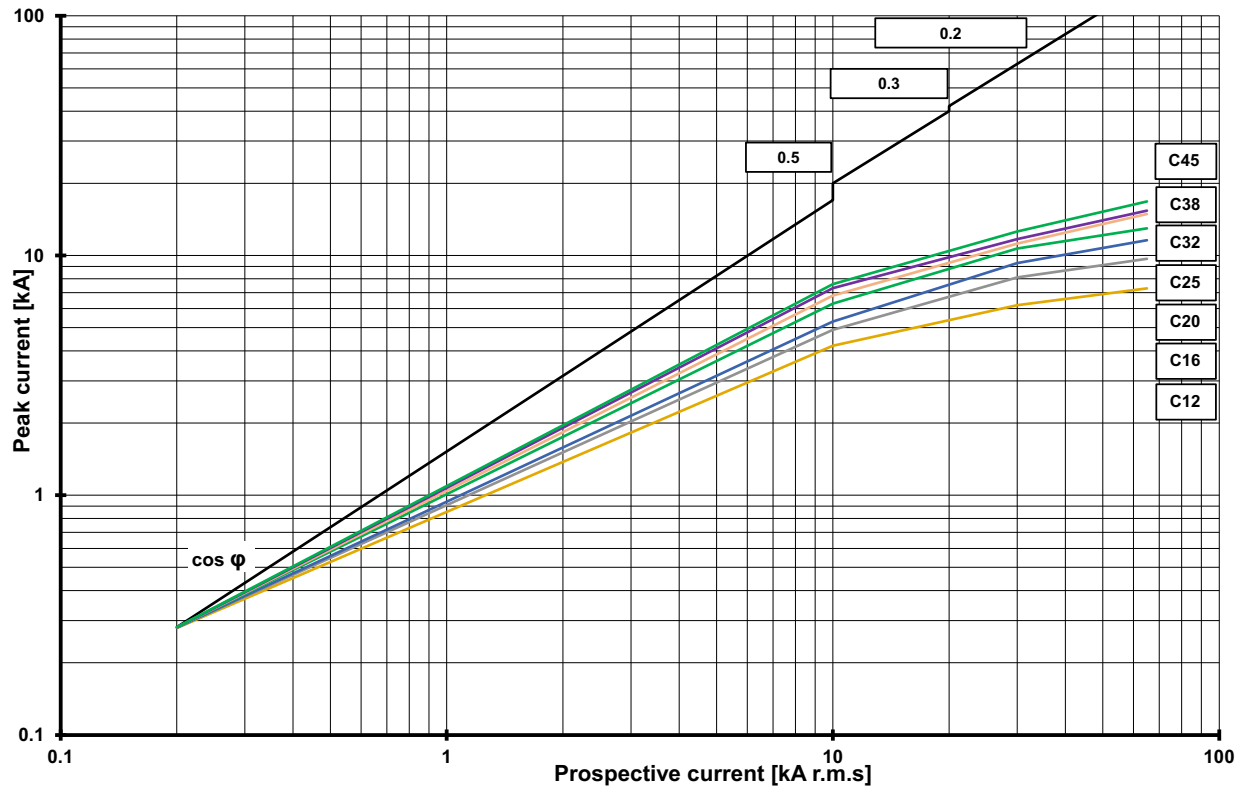


Figure 25 - Max. Let-through Energy at U_e for 480V, 50 Hz for 140MT-F9E/N/T*

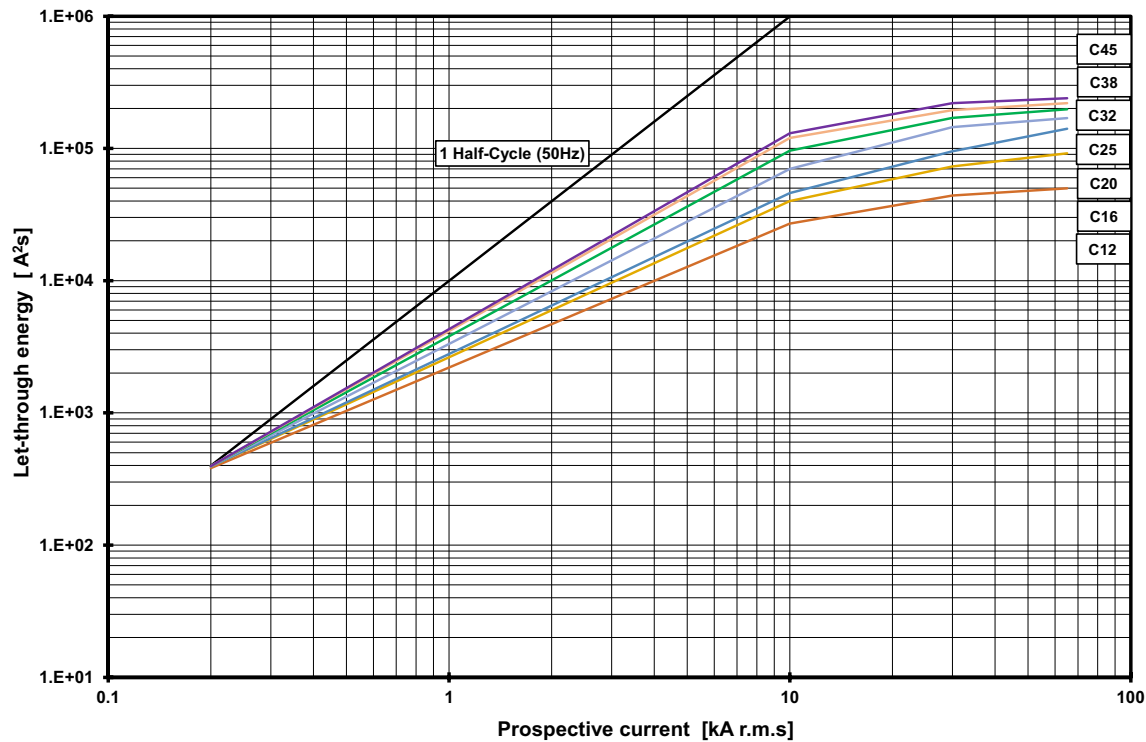


Figure 26 - Max. Cut-off Current at U_e for 600V, 50 Hz for 140MT-F9E/N/T*


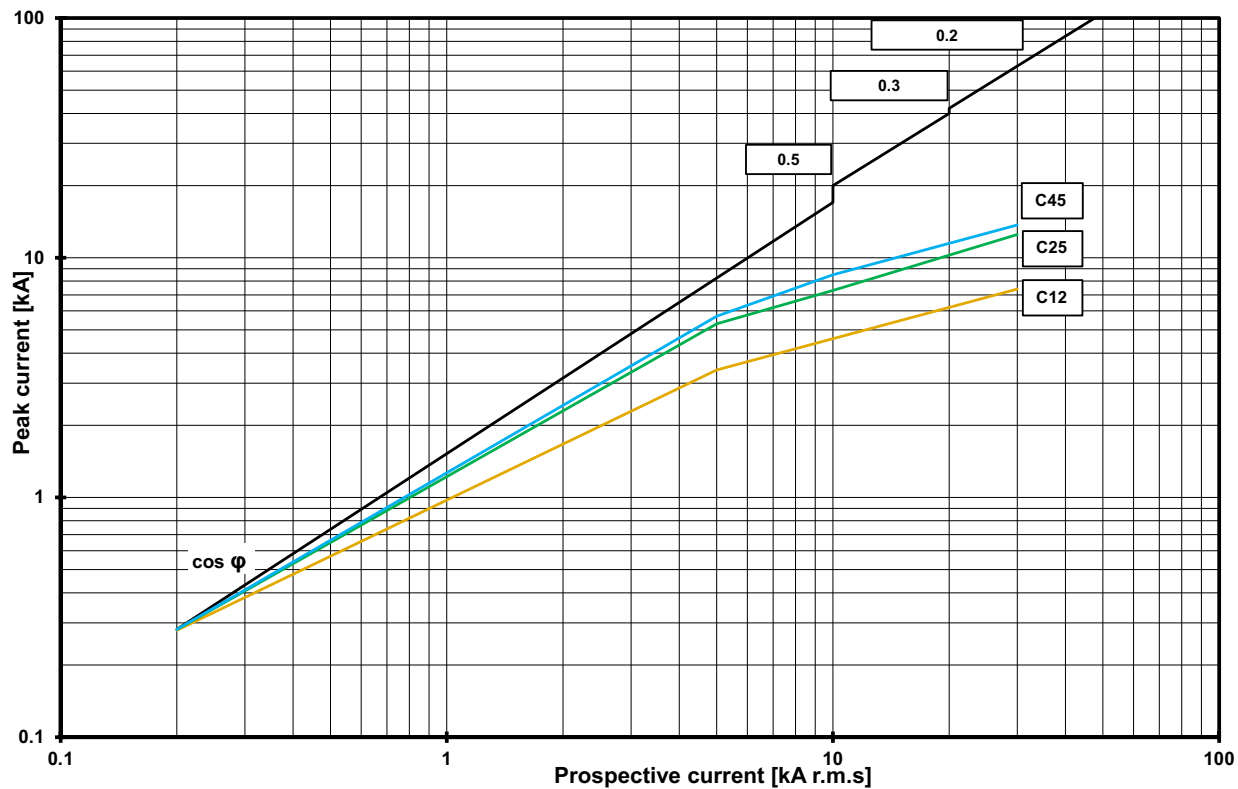


Figure 27 - Max. Let-through Energy at U_g for 600V, 50 Hz for 140MT-F9E/N/T*

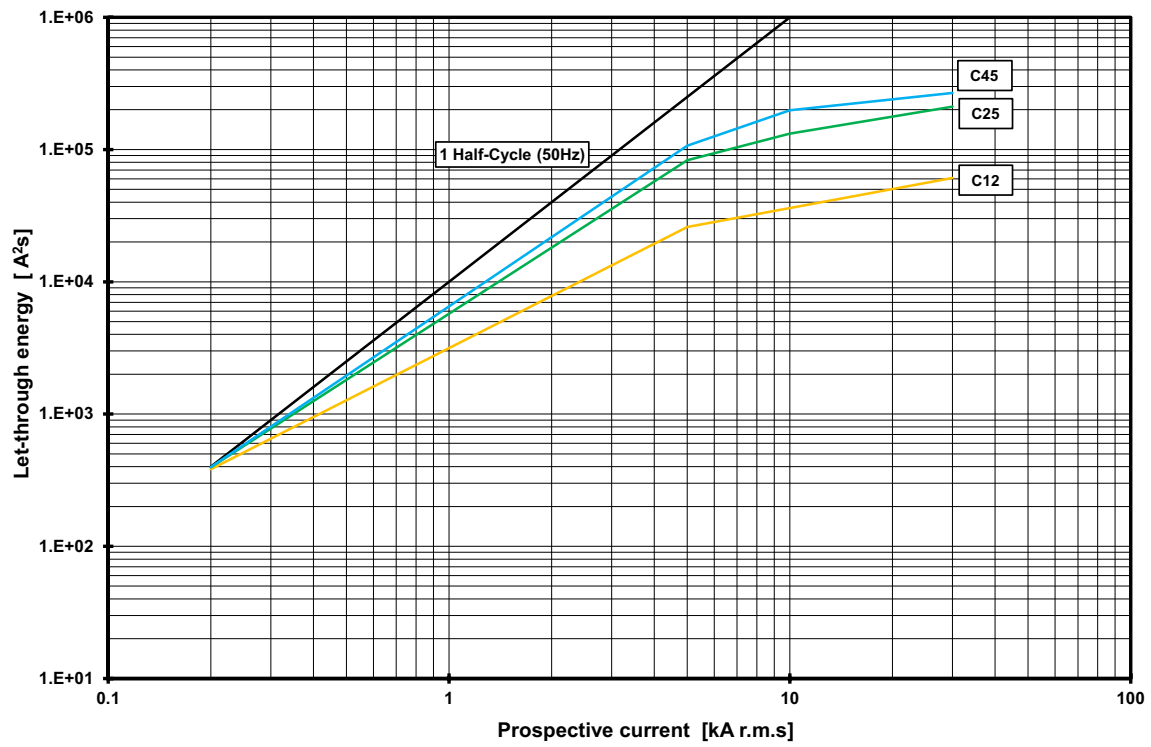

Approximate Dimensions

Dimensions are in millimeters (inches) and are not intended for manufacturing purposes.

140MT-C, 140MT-D Devices and Accessories

Figure 28 - Assembly Diagram

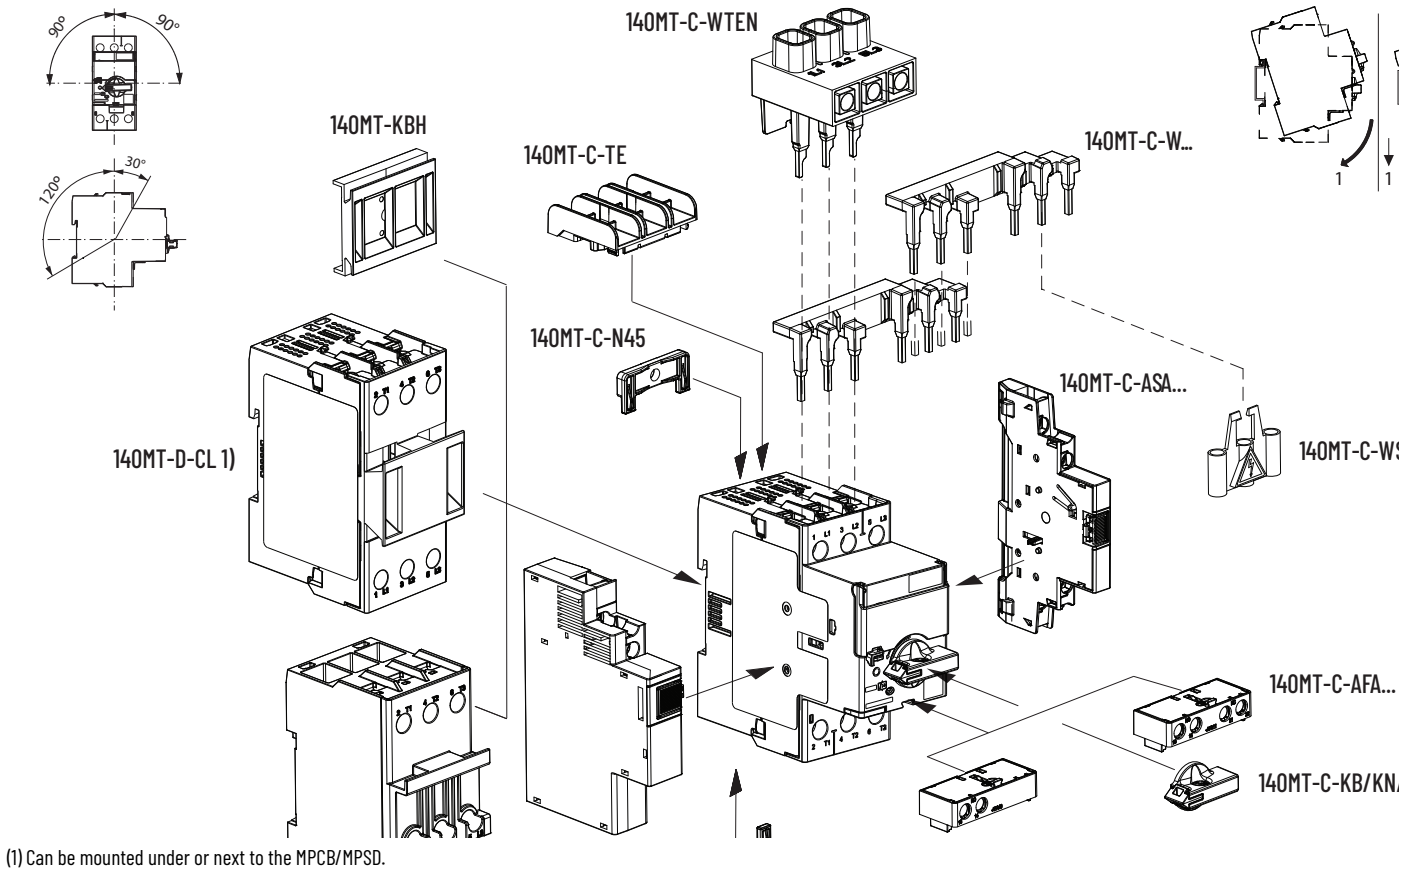


Figure 29 - Mounting Position



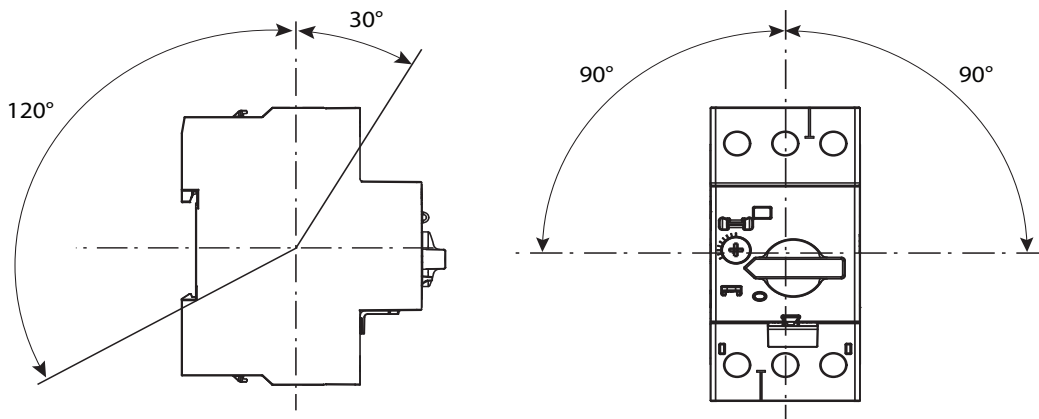


Figure 30 - Spacing Requirements

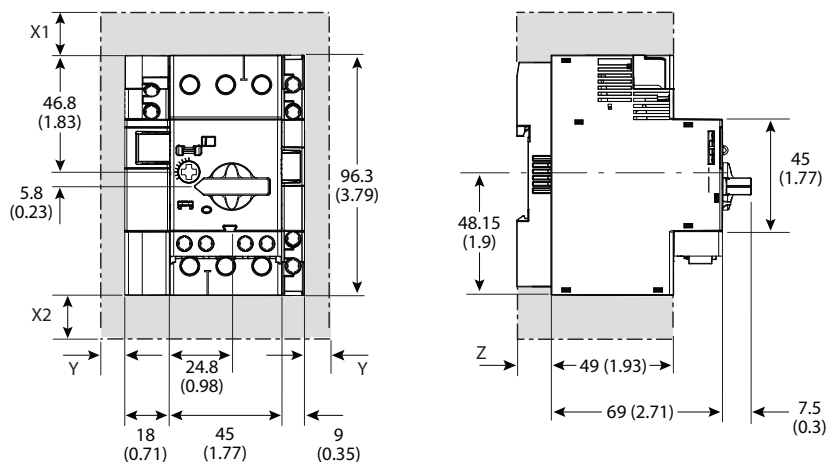

Frame Size	Voltage [V AC]	Minimum Distance to Grounded Parts or Walls [mm (in)]			Z
		X1	X2	Y	
C-Frame	400	30 (1-3/16)	30 (1-3/16)	9 (23/64)	7.5 (19/64)
	500	30 (1-3/16)	30 (1-3/16)	9 (23/64)	
	690	50 (1-31/32)	50 (1-31/32)	30 (1-3/16)	
D-Frame	400	30 (1-3/16)	30 (1-3/16)	9 (23/64)	13.5 (17/32)
	500	30 (1-3/16)	30 (1-3/16)	9 (23/64)	
	690	50 (1-31/32)	50 (1-31/32)	30 (1-3/16)	

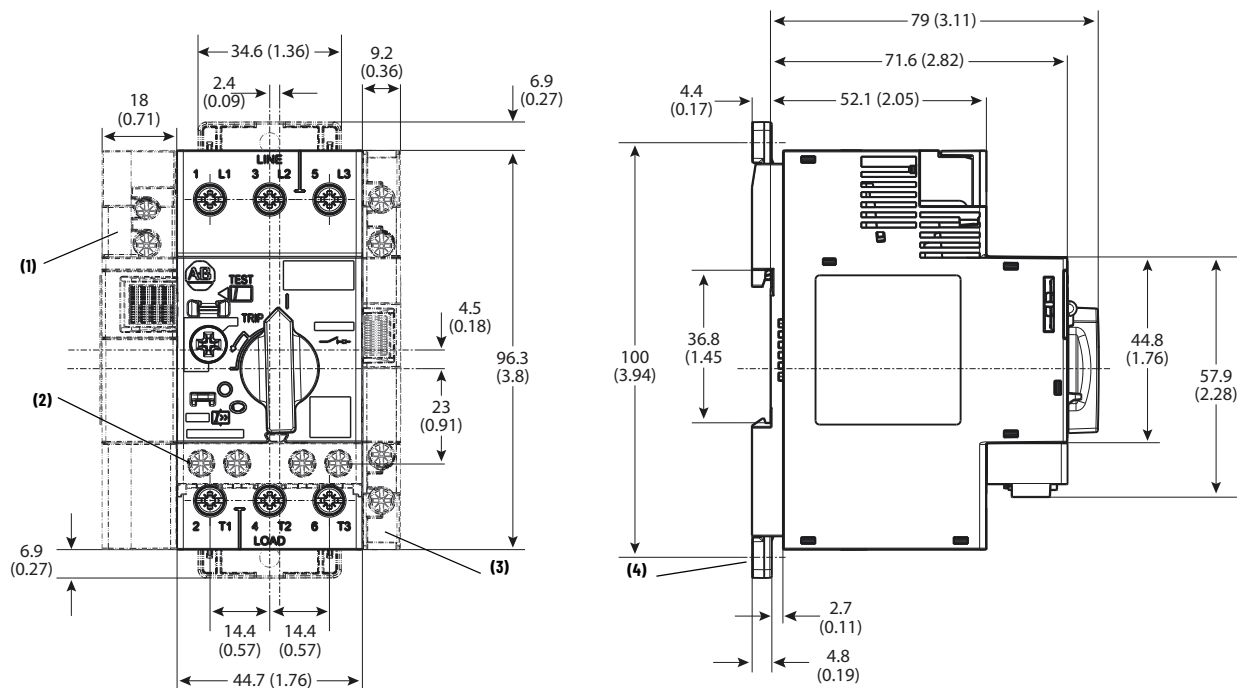Figure 31 - Motor Protection Circuit Breaker (C-Frame), Cat. No. 140MT-C3...




Note	Information
1	Undervoltage/shunt trip
2	Auxiliary contact (front mounted)

Note	Information
3	Auxiliary contact (side mounted)
4	Screw mounting adapter

[illegible]

Note	Information
1	Undervoltage/shunt trip
2	Auxiliary contact (front mounted)

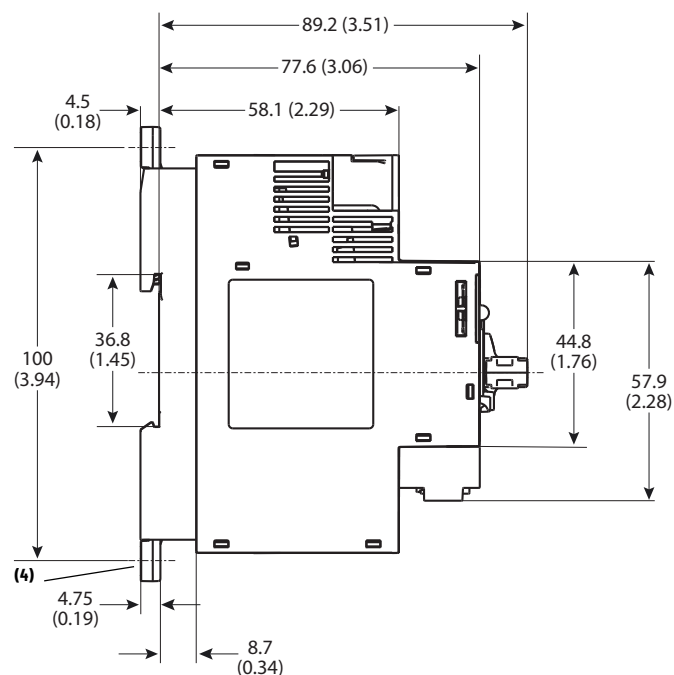

Note	Information
3	Auxiliary contact (side mounted)
4	Screw mounting adapter


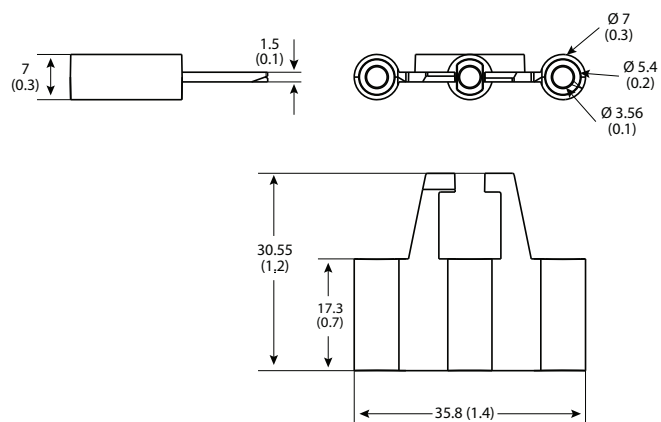
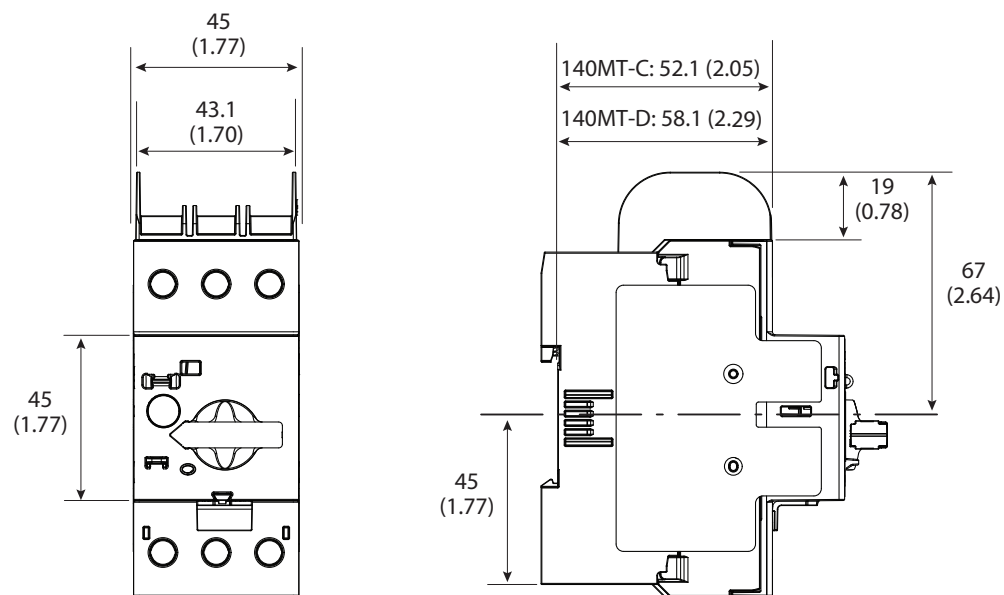
Figure 34 - Terminal Cover, Cat. No. 140MT-C-WSN**Figure 35 - 140MT-C and 140MT-D with Cat. No. 140MT-C-TE Type E Adapter**

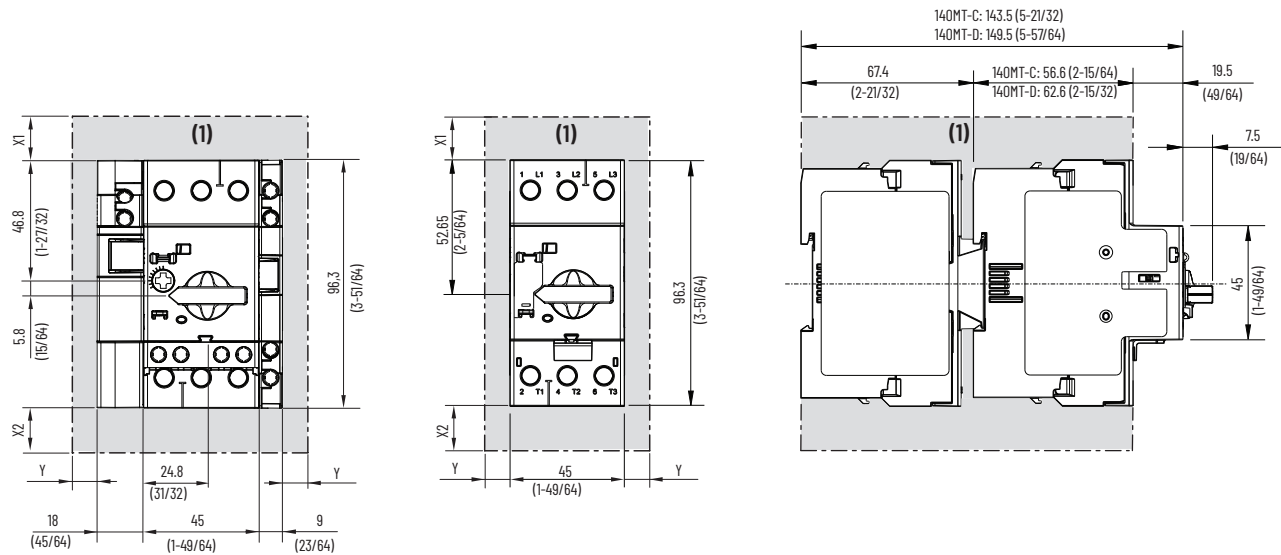Figure 36 - Current Limiter, Cat. No. 140MT-D-CL with 140MT



(1) Minimum clearance to grounded parts or walls (X1, X2, Y)

Voltage	X1	X2	Y
400	30 (1-3/16)	30 (1-3/16)	9 (23/64)
500	30 (1-3/16)	30 (1-3/16)	9 (23/64)
690	50 (1-31/32)	50 (1-31/32)	30 (1-3/16)

140MT-F Devices and Accessories

Figure 37 - Assembly Diagram


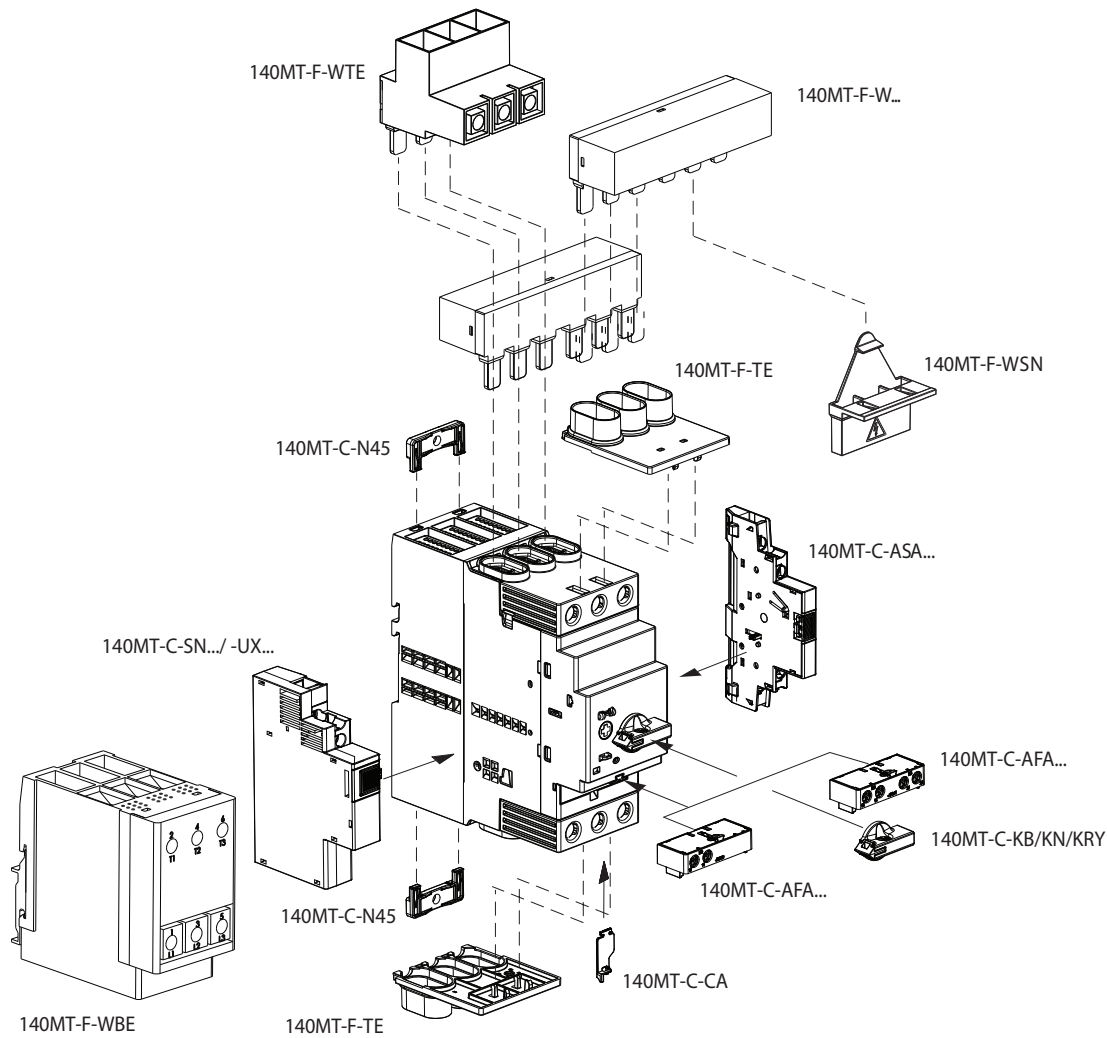


Figure 38 - Mounting Position/Safety Clearance

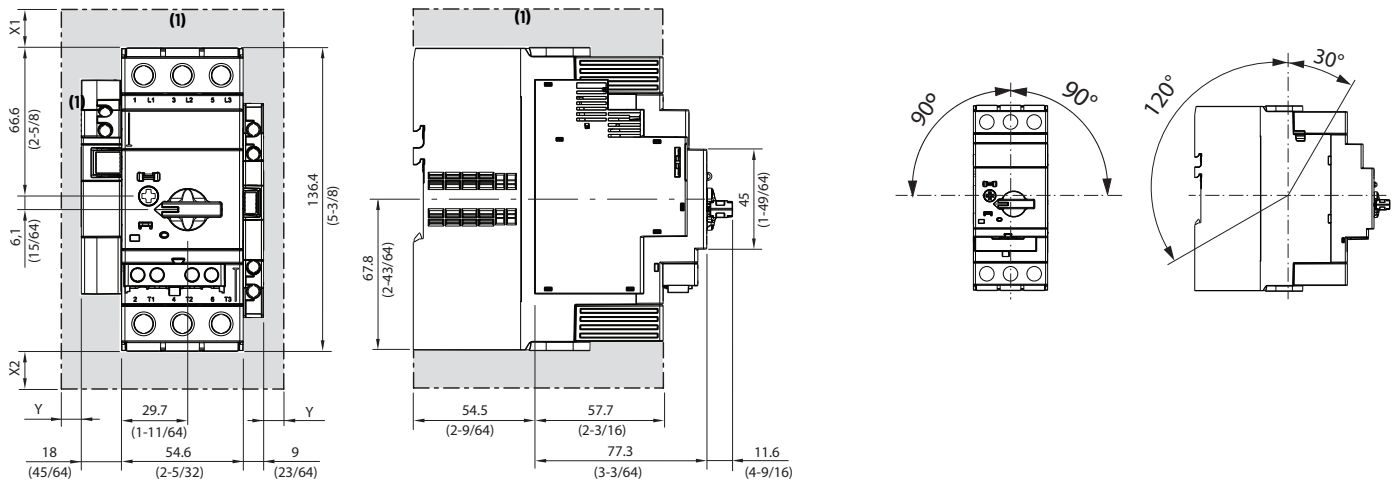

Note	Information
1	Minimum distance to grounded parts or walls

Voltage Rating [A]	X1	X2	Y
400	30 (1-3/16)	30 (1-3/16)	9 (23/64)
500	30 (1-3/16)	30 (1-3/16)	9 (23/64)
690	50 (1-31/32)	50 (1-31/32)	30 (1-3/16)

Figure 39 - Motor Protection Circuit Breaker, Cat. No. 140MT-F...

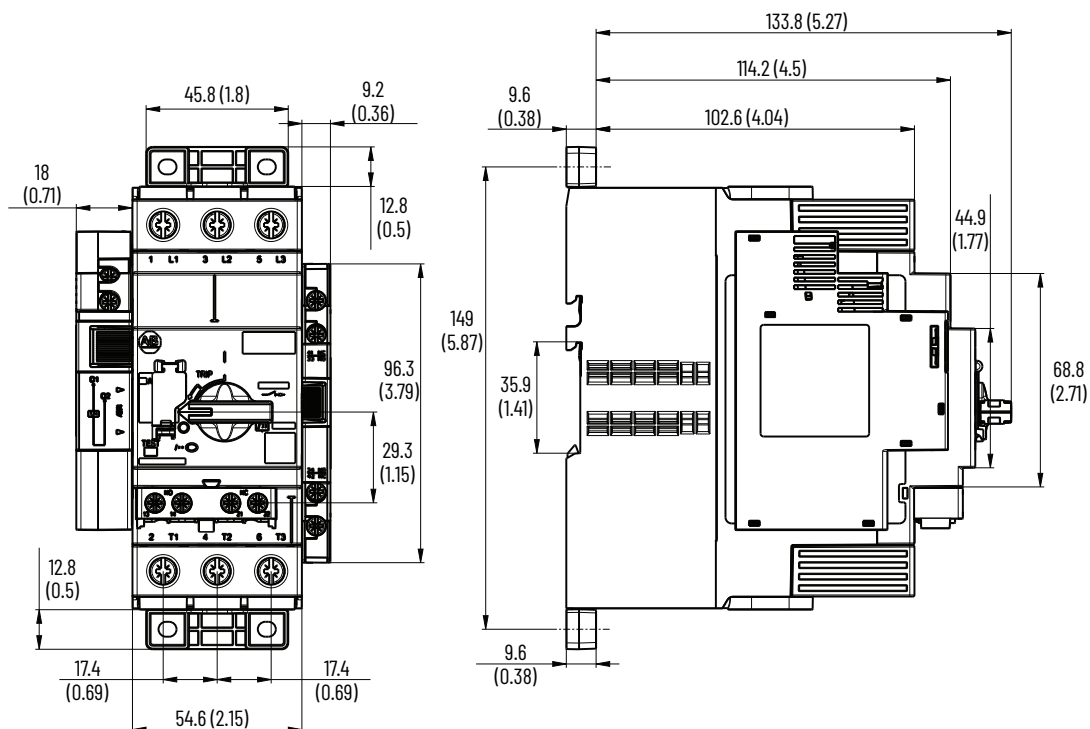


Figure 40 - Cat. No. 140MT-F-TE Type E adapter on Cat. No. 140MT-F...

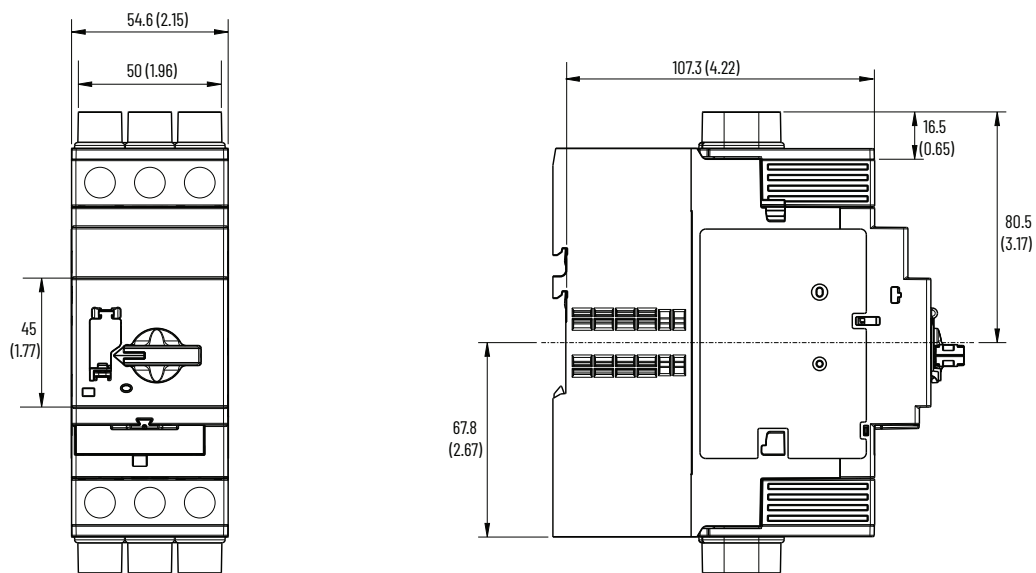


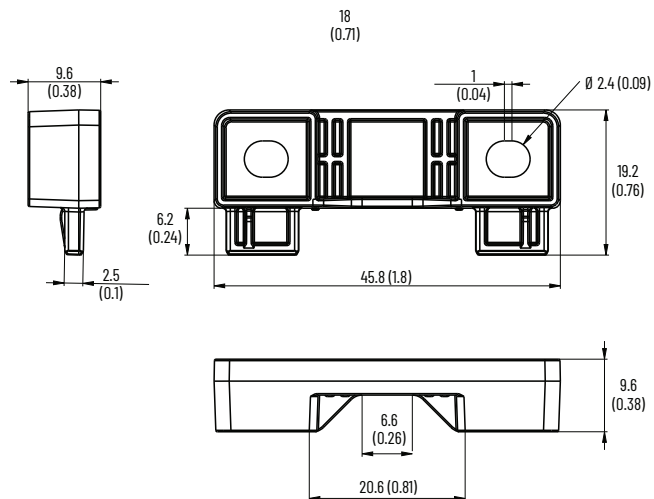
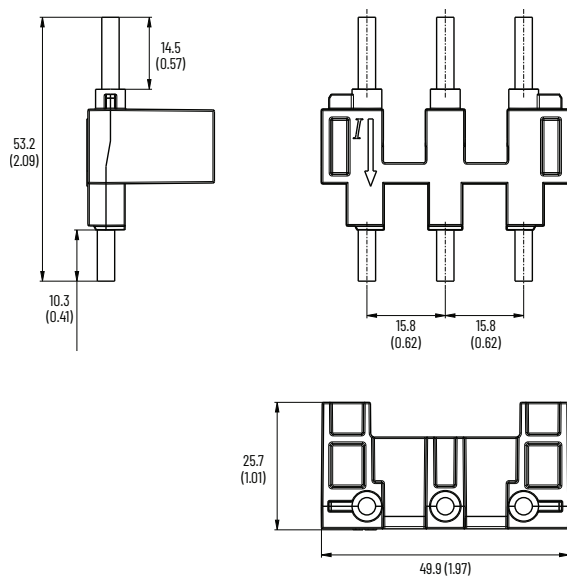
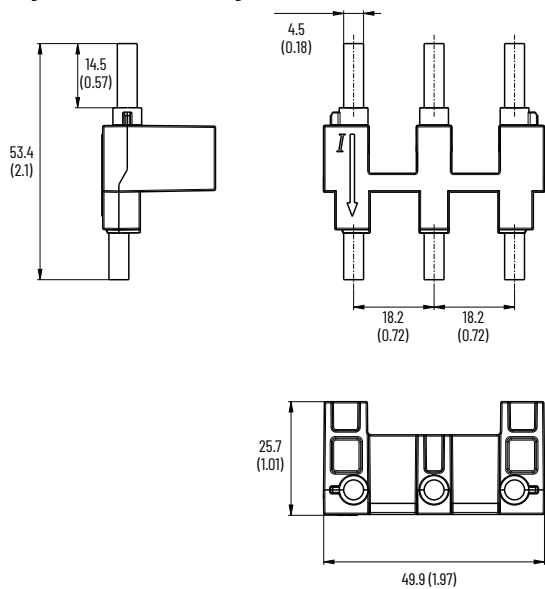
Figure 41 - Screw Adapter, Cat. No. 140MT-F-N45**Figure 42 - Connecting Module, Cat. No. 140MT-F-PNC37****Figure 43 - Connecting Module, Cat. No. 140MT-F-PNC55**

Figure 44 - Connecting Module, Cat. No. 140MT-F-PNE38

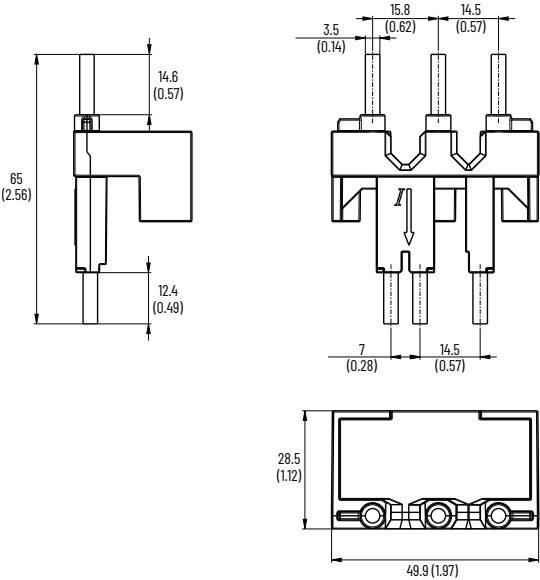


Figure 45 - Connecting Module, Cat. No. 140MT-F-PNE65



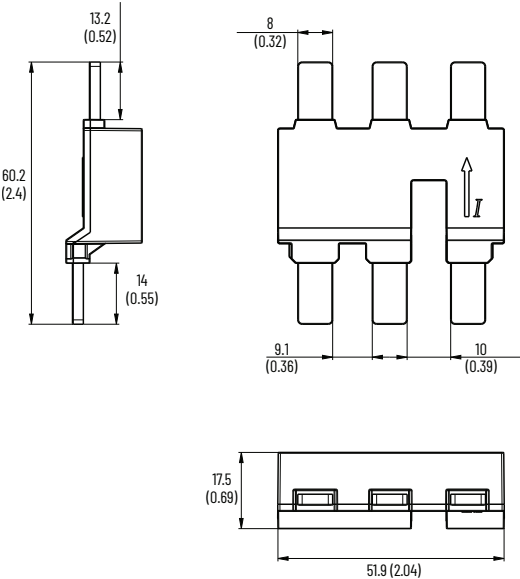


Figure 46 - Feeder Terminal, Cat. No. 140MT-F-WTE

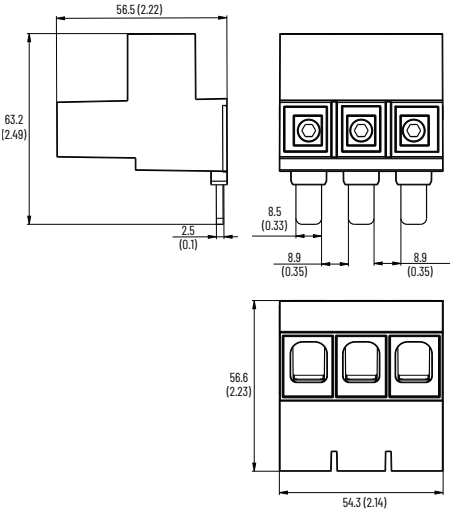

[illegible]

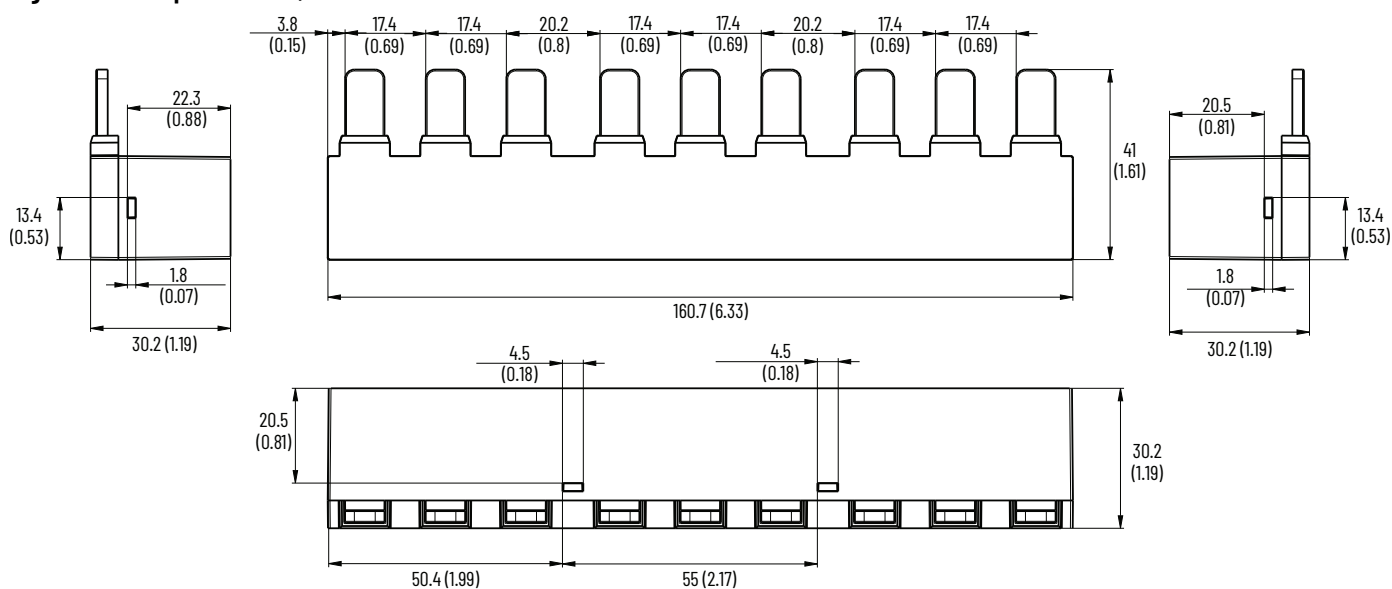Figure 50 - Compact Busbar, Cat. No. 140MT-F-W553



Enclosures

Figure 51 - 140MT-C-ENRY, 140MT-C-ENN Plastic Enclosures


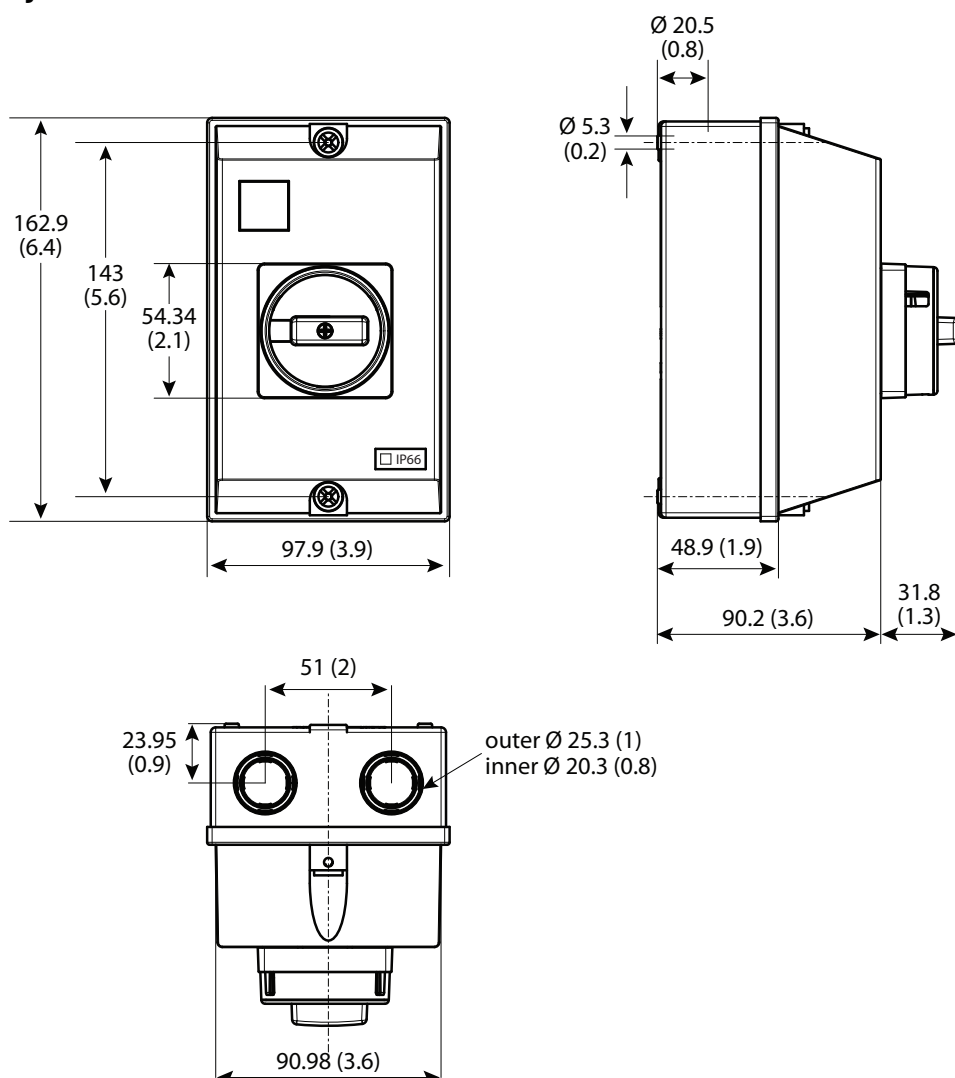


Figure 52 - Drilling Template for 140MT-C-ENRY, 140MT-C-ENN Plastic Enclosures

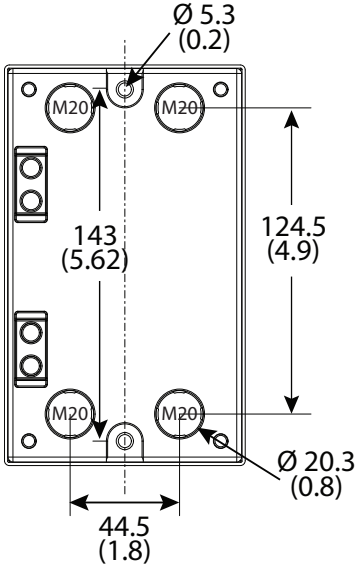

Product Overview

Bulletin 140ME Motor Protective Switching Devices (MPSDs) are UL Listed as Manual, Self-Protected Combination Motor Controllers (Type E), Type F Combination Motor Controllers, and Manual Motor Controllers (with approvals for Suitable as Motor Disconnect and Suitable for use in Group Installation).

When UL/CSA Listed as Manual, Self-Protected Combination Motor Controllers, the 140ME MPSDs provide all necessary NEC/CEC requirements for the protection and control of individual Motor Branch Circuits without additional branch circuit protective devices.



According to UL 60947-4-1, CSA C22.2 No.60947-4-1, these devices may provide the following control and protection functions.

- Disconnect for motor branch circuit
- Short-circuit Protection (magnetic protection)
- Overload protection (thermal protection)
- Manual switching (motor control means)

Group motor installations eliminate the need for individual branch short-circuit protective devices for each motor circuit, reducing panel space, installation and wiring time, and costs. There is only one Branch Circuit Protective Device (BCPD) for the "Group". Bulletin 140ME devices are also UL Listed for Tap Conductor protection in group installations, which helps reduce conductor sizing.

According to UL 60947-4-1, CSA C22.2 No.60947-4-1, these devices certified for group motor installation may provide the following control and protection functions:

- Disconnect for motor branch circuit
- Overload protection (thermal protection)
- Manual switching (motor control means)

Bulletin 140ME devices meet requirement of Motor Protective Switching Devices (MPSD) according to the IEC 60947-4-1 standard for application outside of North America. These devices provide the following functions.

- Disconnect for motor branch circuit
- Short-circuit Protection (magnetic protection)
- Overload protection (thermal protection)
- Manual switching (motor control means)

Bulletin 140ME devices provide Trip Class 10 and 20 overload protection and phase loss sensitivity protection. These are suitable for single- and three-phase applications.

The network-compatible version of the 140ME MPSD lets our motor control devices support the Connected Enterprise® via our EtherNet/IP™ In-cabinet communication. It develops our smart motor control portfolio by providing advanced functional safety solutions.

The compatibility with Ethernet/IP In-cabinet communication enables remote monitoring, control, and diagnostics. This can facilitate predictive maintenance and reduce downtime.

All 140ME MPSDs share electromechanical accessories with the 140MT family of Motor Protection Circuit Breakers; they share electronic accessories with the Bulletin 193 E100™ Electronic Overload Relays.

Application Diagrams

Group Installation with MPSDs

There is only one Branch Circuit Protective Device (BCPD) for the "Group".


Group installation has been successfully used for many years in the U.S. and Canada. It allows "two or motors or one or more motors and other loads to be connected to the same branch-circuit...". The most restrictive part of the conditions specified for Group Installation is the requirement for the protection of the conductors for each motor circuit. In the U.S. NEC for 2002, a new rule for the conductor sizing was added for devices that are listed and marked "Suitable for use as Tap Conductor Protection".

[Figure 53](#) shows an example that illustrates installations involving multiple motors with a single BCPD protecting the entire "Group".

Bulletin 140ME Motor Protective Switching Devices are UL/CSA Listed for Group Installation: conductors from the BCPD to each motor must be a minimum of 1/3 the ampacity of the Branch Circuit conductors.

Bulletin 140ME Motor Protective Switching Devices are UL/CSA Listed for Tap conductor Protection in Group Installations: conductors from the BCPD to manual motor controller listed as "...Tap Conductor Protection..." must be minimum of 1/10 the rating or setting of the BCPD. Conductors from the controller to the motor must be 125% of the motor FLA.

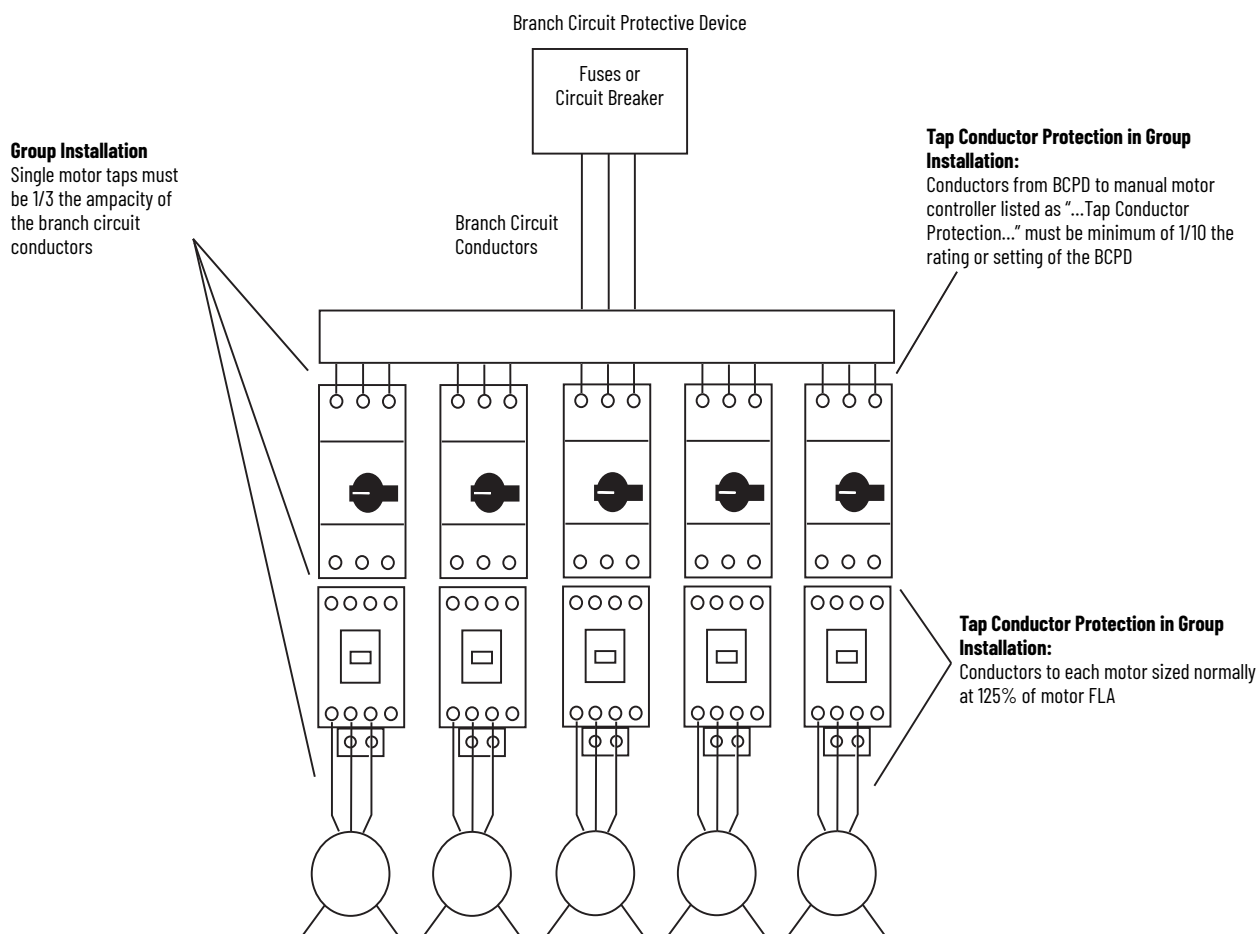Figure 53 - Group Installation with MPSDs




Multiple Motor Installation with MPSDs

Each Motor has an Individual Branch Circuit Protective Device.

Bulletin 140ME MPSDs are UL/CSA Listed as Type E Manual Self-Protected Combination Motor Controllers or UL/CSA Listed as Circuit Breakers. These UL/CSA Listings allow the Bulletin 140ME MPSDs to provide the branch-circuit, short-circuit protection (and overload protection) for each individual motor circuit.

Additional short-circuit protection is not required for the protection of the individual motor circuits, leaving only the requirement for protection of the feeder circuit conductors by an upstream protective device. [Figure 54](#) shows an example that illustrates installations involving multiple motors, each with its own branch-circuit protection (BCPD).

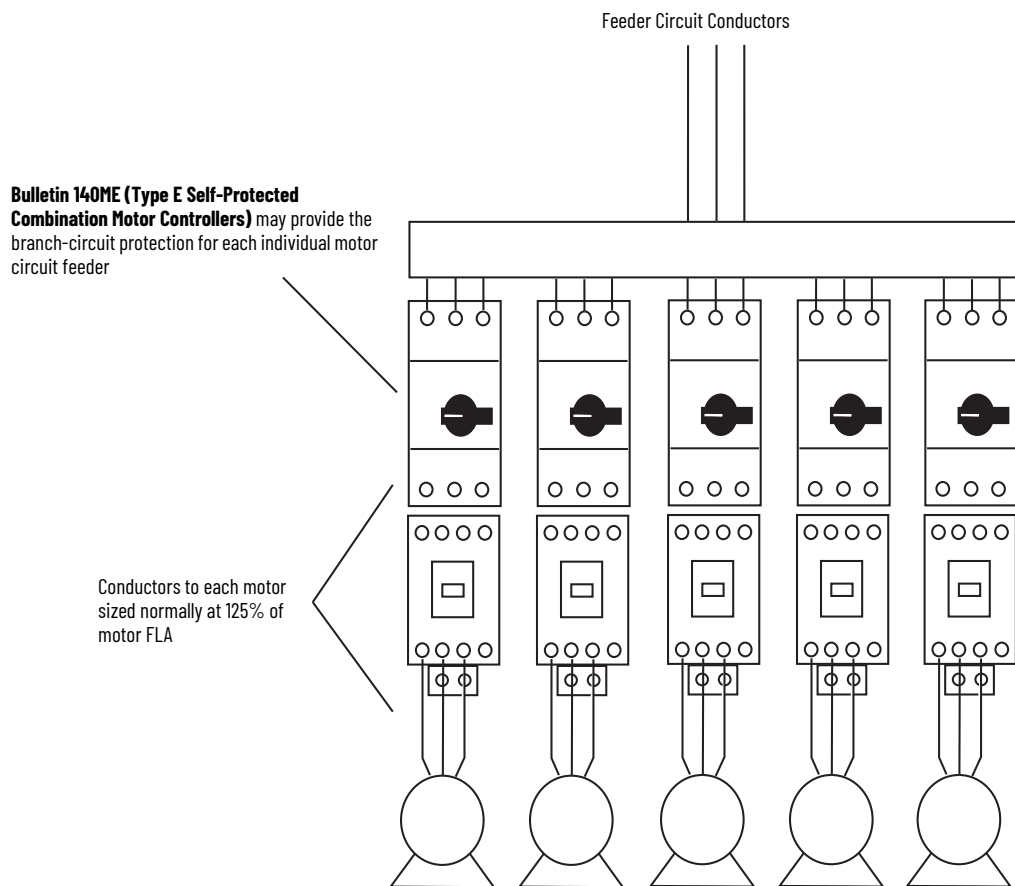Figure 54 - Multiple Motor Installation with MPSDs



Catalog Number Explanation

D-Frame Devices

140ME - **D** **9** **EE** - **B10**
 a b c d e

a		b		c		d		e	
Bulletin Number		Current Rating/ Frame Size		Interrupting Rating/ Breaking Capacity		Function		Current Range	
Code	Description	Code	Description	Code	Description	Code	Description	Code	Description
140ME	Motor Protective Switching Device (Electronic Overload)	D	40 A, Frame D	9	High break	EE	Electronic Thermal, Class 10 & 20 / Fixed Magnetic (14 x I_n) MPSD	B10	0.25...1.0 A
						EF	Electronic Thermal/Fixed Magnetic (14 x I_n) MPSD, network compatible	B25	0.63...2.5 A
								B63	1.6...6.3 A
								C16	4...16 A
								C40	16...40 A

Product Selection

Selection Using Current and Hp/kW Ratings

Table 60 - Motor Protective Switching Devices

Rated Operational Current (I_e) [A]	Motor Current Adjustment Range [A]	Nominal Magnetic Trip Current [A]	Max Short-circuit Current [kA]		Max. 3-phase Hp Ratings ⁽¹⁾				Max. kW, 3-Phase – AC-3 ⁽¹⁾				Cat. No.
			400V (I_{cu})	480V (group motor)	200V	230V	460V	575V	230V	400/415V	500V	690V	
D-Frame, Electronic Thermal/Fixed Magnetic (14 x I_n)													
1	0.25...1.0	14	65	65	—	—	—	0.5	0.18	0.25	0.37	0.55	140ME-D9EE-B10
2.5	0.63...2.5	88	65	65	0.5	0.5	1	1.5	0.37	0.75	1.1	1.8	140ME-D9EE-B25
6.3	1.6...6.3	140	65	65	1	1.5	3	5	1.5	2.2	3	4	140ME-D9EE-B63
16	4...16	224	65	65	3	5	10	10	4	7.5	10	13	140ME-D9EE-C16
40	16...40	480	50	30	10	10	30	30	11	20	24	30	140ME-D9EE-C40
D-Frame, Electronic Thermal/Fixed Magnetic (14 x I_n), network compatible													
1	0.25...1.0	14	65	65	—	—	—	0.5	0.18	0.25	0.37	0.55	140ME-D9EF-B10
2.5	0.63...2.5	88	65	65	0.5	0.5	1	1.5	0.37	0.75	1.1	1.8	140ME-D9EF-B25
6.3	1.6...6.3	140	65	65	1	1.5	3	5	1.5	2.2	3	4	140ME-D9EF-B63
16	4...16	224	65	65	3	5	10	10	4	7.5	10	13	140ME-D9EF-C16
40	16...40	480	50	30	10	10	30	30	11	20	24	30	140ME-D9EF-C40

(1) Hp/kW ratings shown are for reference. The final selection of the MPSD depends on the actual motor full load current.

Selection Using Application Ratings

See [page 95](#) for combination ratings.

Table 61 - UL/CSA Listed Application Ratings, Motor Protective Switching Devices

UL 60947-4-1 – Manual Motor Controller							UL 60947-4-1 Self-Protected (Type E) Combination Motor Controller		Cat. No.
Max. Fuse or Circuit Breaker per NEC [A]	Max Short-circuit Current [kA]						Max Short-circuit Current [kA]		
	Group Motor Installation		Motor Disconnect		Tap Conductor Protection				
	480V	600V	480V	600V	480Y/277V ⁽¹⁾	600Y/347V ⁽¹⁾	480Y/277V ⁽¹⁾	600Y/347V ⁽¹⁾	
D-Frame, Electronic Thermal/Fixed Magnetic (14 x I _n)									
450	65	50	65	50	65	50	65	50	140ME-D9EE-B10
450	65	30	65	30	65	30	65	30	140ME-D9EE-B25
450	65	30	65	30	65	30	65	30	140ME-D9EE-B63
450	65	30	50	18	50	18	50	18	140ME-D9EE-C16
450	30	30	30	18	30	—	30	—	140ME-D9EE-C40
D-Frame, Electronic Thermal/Fixed Magnetic (14 x I _n), network compatible									
450	65	50	65	50	65	50	65	50	140ME-D9EF-B10
450	65	30	65	30	65	30	65	30	140ME-D9EF-B25
450	65	30	65	30	65	30	65	30	140ME-D9EF-B63
450	65	30	50	18	50	18	50	18	140ME-D9EF-C16
450	30	30	30	18	30	—	30	—	140ME-D9EF-C40

(1) For full voltage (delta) ratings above 277V or 347V, follow the NEC or CEC rules for group motor applications.







Table 62 - IEC Application Ratings, Interrupting Rating/Breaking Capacity

Breaking Capacity, IEC 60947-2															Cat. No.
230/240V AC			400/415V AC			440/460V AC			500/525V AC			690V AC			
I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	I_{cu} [kA]	I_{cs} [kA]	Back-up Fuse Rating ⁽¹⁾ [A]	
D-Frame, Electronic Thermal/Fixed Magnetic (14 x I_n)															
65	65	25	65	35	25	50	25	25	50	25	20	6	3	16	140ME-D9EE-B10
65	65	63	65	35	63	50	25	63	50	25	50	6	3	40	140ME-D9EE-B25
65	65	80	65	35	80	50	25	80	50	25	63	6	6	50	140ME-D9EE-B63
65	50	100	65	25	100	25	15	100	25	15	80	4	3	63	140ME-D9EE-C16
50	35	125	50	20	125	12	6	125	12	6	100	3	2	100	140ME-D9EE-C40
D-Frame, Electronic Thermal/Fixed Magnetic (14 x I_n), network compatible															
65	65	25	65	35	25	50	25	25	50	25	20	6	3	16	140ME-D9EF-B10
65	65	63	65	35	63	50	25	63	50	25	50	6	3	40	140ME-D9EF-B25
65	65	80	65	35	80	50	25	80	50	25	63	6	6	50	140ME-D9EF-B63
65	50	100	65	25	100	25	15	100	25	15	80	4	3	63	140ME-D9EF-C16
50	35	125	50	20	125	12	6	125	12	6	100	3	2	100	140ME-D9EF-C40

(1) Back-up fuses are type gG, aM.

Accessories

Table 63 - Auxiliary Contacts

Description	Operator Position ⁽¹⁾			Term. No.	Contact Description	Connection Diagram ⁽²⁾	For Use With	Cat. No.
	OFF	ON	Tripped					
 Front-Mounted Auxiliary Contact 1-pole or 2-pole - No additional space required - Only one per device	0	X	0	13-14	N.O. Aux		140ME	140MT-C-AFA10
	0	X	0	13-14	N.O. Aux		140ME	140MT-C-AFA11
 Front-Mounted Auxiliary Contact 1-pole or 2-pole - No additional space required - Only one per device	X	0	X	21-22	N.C. Aux		140ME	140MT-C-AFA11
	0	X	0	13-14	N.O. Aux		140ME	140MT-C-AFA20
	0	X	0	23-24	N.O. Aux		140ME	140MT-C-AFA20
	0	X	0	33-34	N.O. Aux		140ME	140MT-C-ASA20
 Right Side-Mounted Auxiliary Contact 2-pole - Adds 9 mm (0.35 in.) to the width of the device - One per device - Not suitable for UL 489 applications	0	X	0	43-44	N.O. Aux		140ME	140MT-C-ASA20
	X	0	X	31-32	N.C. Aux		140ME	140MT-C-ASA02
	X	0	X	41-42	N.C. Aux		140ME	140MT-C-ASA02
	0	X	0	33-34	N.O. Aux		140ME	140MT-C-ASA11
	X	0	X	41-42	N.C. Aux		140ME	140MT-C-ASA11
	0	X	0	33-34	N.O. Aux		140ME	140MT-C-ASA11

(1) X = Contact Closed; 0 = Contact Open

(2) Connection Diagram Reference:







Table 64 - Trip Contacts

Description	Operator Position ⁽¹⁾			Term. No.	Contact Description	Connection Diagram ⁽²⁾	For Use With	Cat. No.
	OFF	ON	Tripped					
								
 Front-Mounted Trip Contact • 2-pole • Indicates tripping of device • No additional space required	0	X	0	13-14	N.O. Aux		140ME	140MT-C-AFAR10A10
	0	0	X	27-28	N.O. Trip (short-circuit and overload)			
	X	0	X	11-12	N.C. Aux		140ME	140MT-C-AFAR10A01
	0	0	X	27-28	N.O. Trip (short-circuit and overload)			
	0	X	0	13-14	N.O. Aux		140ME	140MT-C-AFAR10A10
	X	X	0	25-26	N.C. Trip (short-circuit and overload)			
	0	0	X	27-28	N.O. Trip (short-circuit and overload)			140MT-C-AFAR10M10
	0	0	X	17-18	N.O. Trip (short-circuit)			

(1) X = Contact Closed; 0 = Contact Open

(2) Connection Diagram Reference:





Table 65 - Undervoltage Trip Units

Description	Connection Diagram ⁽¹⁾	Trip Rating	For Use With	Cat. No.
 Undervoltage Trip • Left-side mounted • Adds 18 mm to the width of the device • Automatically trips MPSD when voltage falls below 35...70%		24V, 50 Hz/24...28V, 60 Hz	140ME	140MT-C-UXK
		120V, 60 Hz		140MT-C-UXD
		220...230V, 50 Hz		140MT-C-UXF
		240...260V, 60 Hz		140MT-C-UXA
		380...400V, 50 Hz		140MT-C-UXN
		480V, 60 Hz/415V, 50 Hz		140MT-C-UXB

(1) Connection Diagram Reference:





Table 66 - Shunt Trip Units

Description	Connection Diagram ⁽¹⁾	Trip Rating	For Use With	Cat. No.
 Shunt Trip - Left-side mounted - Adds 18 mm to the width of the device - Provides remote tripping of the MPSD - Maximum on time for DC operated devices: 5 sec.		24V, 50 Hz/24...28V, 60 Hz	140ME	140MT-C-SNK
		110V, 50 Hz/120V, 60 Hz		140MT-C-SND
		220...230V, 50 Hz		140MT-C-SNF
		240...260V, 60 Hz		140MT-C-SNA
		277V, 60 Hz		140MT-C-SNT
		380...400V, 50 Hz		140MT-C-SNN
		480V, 60 Hz/415V, 50 Hz		140MT-C-SNB
		24V DC		140MT-C-SNZJ

(1) Connection Diagram Reference:




Table 67 - Additional Accessories

Description	For Use With	Cat. No.
 Lockable Twist Knob - For one padlock 4...6 mm (3/16 in.) diameter shackle - Can be locked in OFF position	Blue	140MT-C-KB
	Black	140MT-C-KN
	Red/Yellow	140MT-C-KRY
 Locking Tag - Padlock attachment to the lockable handles - Up to three padlocks 4...8 mm (5/16 in.) diameter shackle	140MT-C-KB 140MT-C-KN 140MT-C-KRY	140MT-C-M3
 Door Coupling Handle - For 3 padlocks 4...8 mm (5/16 in.) in diameter - IPX4 Protection/Type 1, 3R Interlock override capability - Can be modified for locking in ON position - Ships with coupling — order extension shaft and legend plate separately	Black	140MT-C-DN66
	Red/Yellow	140MT-C-DRY66
 Extension Shaft - Cut to required length for mounting depth (front of DIN Rail to front of enclosure door) - For Cat. Nos. 140MT-C-DN66 and 140MT-C-DRY66 handles	3.2 cm (1.25 in)	140MT-C-DSS
	26 cm (10.24 in)	140MT-C-DS
	41 cm (16.14 in)	140MT-C-DSL

Table 67 - Additional Accessories (Continued)

	Description		For Use With	Cat. No.
	Door Coupling Handle - Type 3, 3R, 4, 4X, 12 (IP66) - For up to 2 padlocks - Fits in 30.5 mm cutout - Requires 140MT-C-DNC coupler	Black	140ME	140MT-SB
		Red/Yellow	140ME	140MT-SY
	Extension Shaft Cut to required length for mounting depth (front of DIN Rail to front of enclosure door)	12 in. (30.48 cm)	140MT-SB, 140MT-SY	140MT-S1
		21 in. (53.34 cm)	140MT-SB, 140MT-SY	140MT-S2
	Coupler Included with Cat. Nos. 140MT-C-DN66 and 140MT-C-DRY66		140ME	140MT-C-DNC
	Extension Shaft Support - Provides consistent alignment of the 140MT-C-DS and 140MT-C-DSL shafts with the 140MT-C-DN66 or 140MT-C-DRY66 door coupling handles - Recommended for shaft lengths >200 mm (7.9 in.) - Snaps on the right side of the 140MT-C, -D, 140M-F, or 140UT-D device and allows the addition of one side-mounted auxiliary contact - Width: 9 mm (0.35 in.) - For use with screw-mounted or hat rail mounted devices		140ME	140MT-C-SHS
	Current Limiter - Operational voltage U_e: 690V - Rated impulse-withstand voltage U_{imp}: 6 kV - Thermal current I_{th} - IEC: 64 A - UL: 52 A		140MT-D, versions E and N 140ME	140MT-D-CL
	Legend Plate	Marking: "Hauptschalter" and "Main Switch"	140MT-C-DN66	140MT-C-DFCN
		Marking: "Not-Aus" and "Emergency Off"	140MT-C-DRY66	140MT-C-DFCRY
	Screw Adapter - For screw arrangement of a Motor Protective Switching Device - Must be ordered in multiples of 10 (10 pieces/pkg)		140ME	140MT-C-N45
	Top Hat Rail Adapter – 10 mm (0.39 in.) - Adjusts the depth of the 140MT-C to the 140MT-D - Allows the use of compact busbars across both frame sizes - Must be ordered in multiples of 10 10 pieces/pkg		140ME	140MT-KBH

Table 68 - Modules and Adapters

	Description	For Use With	Cat. No.
	ECO Connecting Modules — 18 A (IEC), 17 A (UL) • Eco-starters mount on single DIN Rail (140ME on DIN Rail) • Electrical and mechanical interconnection of 140ME MPSD and 100-E contactors	140ME-D to 100(S)-E09...16 ⁽¹⁾	140MT-D-PE16
		140ME-D to 100(S)-E09QJ...16QJ	140MT-D-PSE16
	ECO Connecting Modules — 23 A (IEC), 22 A (UL) • Eco-starters mount on single DIN Rail (140ME on DIN Rail) • Electrical and mechanical interconnection of 140ME MPSD and 100-C contactors	140ME-D to 100-C09...C23	140MT-D-PEC23
	ECO Connecting Modules — 30 A (IEC), 30 A (UL) • Eco-starters mount on single DIN Rail (140ME on DIN Rail) • Electrical and mechanical interconnection of 140ME MPSD and 100-C contactors	140ME-D to 100-C30...C37	140MT-D-PEC37
	ECO Connecting Modules — 40 A (IEC), 34 A (UL) • Eco-starters mount on single DIN Rail (140ME on DIN Rail) • Electrical and mechanical interconnection of 140ME MPSD and 100-E contactors	140ME-D to 100(S)-E26...38 ⁽¹⁾	140MT-D-PE38
	Connecting Modules — 23 A (IEC), 30 A (UL) and 30 A (IEC), 30 A (UL) • Contactor and MPSD MUST BE mounted separately on (2) DIN Rails Electrical interconnection of 140ME and 100-C contactors	Compatible Contactor coil types: • AC (all) • 12V DC • 24V DC Electronic	140MT-D-PNC23
			140MT-D-PNC37
	Coil Extension Modules • Provides access to coil terminals on 3-component starters • 140MT-F-PSC43 fits ONLY on 140MT-C, 140MT-D and 140ME-D	100-C30...C37 contactors	140MT-F-PSC43
	Spacing Adapter • Required for self-protected combination motor controller (Type E) applications of Bul. 140ME-D MPSDs. Not for use with bus bars.	140ME	140MT-C-TE

(1) Not suitable for 100(S)-E09...38QJ or 300(S)-T0...80QJ contactors.

Table 69 - Electronic Accessories


	Description	For Use With	Cat. No.
	Overload Relay Protection Module • Auto/manual reset • Trip indication • Local and remote reset • Compatible with Remote Reset (ERID) • Jam protection • Contactor weld indication	140ME-D9EF	140ME-D-ORF
	Universal Protection Module (ground fault/jam) • Includes adapters for compatible contactors No Remote Reset Capability. Only compatible with 193-1ERIDN	140ME-D9EF	193-1EGJ
	Protection Accessory Anti-Tamper Shield	140ME-D-ORF 193-1EGJ	193-1EMC
	Reset Adapter (electronic remote reset) • Includes adapters for compatible contactors No Remote Reset Capability. Only compatible with 193-1ERIDN	140ME-D9EF	193-1ERR
	Electronic Remote Indication Display	no reset	140ME-D9EF
			193-1ERIDN

Table 70 - Other Accessories

	Description		For Use With	Cat. No.
	Feeder Block for Compact Busbar		140ME with 140MT-KBH adapter	140MT-C-WBE
	Feeder Terminal for Compact Busbar		140ME	140MT-C-WTEN
	Three-phase Compact Busbar for MPSDs — 64 A Max Continuous Current	2 connections	140ME	140MT-C-W452
		3 connections		140MT-C-W453
		4 connections		140MT-C-W454
		5 connections		140MT-C-W455
	Three-phase Compact Busbar for MPSDs — 64 A Max Continuous Current	2 connections	140ME	140MT-C-W542
		3 connections		140MT-C-W543
		4 connections		140MT-C-W544
		5 connections		140MT-C-W545
	Terminal Cover		140ME	140MT-C-WSN
	DIN (#3) symmetrical hat rail		140ME	199-DR1
	DIN (#3) Symmetrical Rail		140ME	1492-DR9
	Label Sheet	Pkg. qty. 10	140ME	100-FMS
	Self-adhesive Markers	each label 6 x 15 mm (0.236 x 0.59 in)	140ME	1492-MAS6X15
	Adhesive labels	each label 6 x 17 mm (0.236 x 0.67 in)	140ME	1492-MDM6X17-W
		each label 8 x 20 mm (0.315 x 0.787 in)	140ME	1492-MDM8X20-W

Specifications

Table 71 - General Data

Attribute			140ME-D
Standards compliance	IEC		IEC/EN 60947-4-1
	cULus		UL 60947-4-1, CSA C22.2, No. 60947-4-1
Certifications	Regional		cULus Listed (File No. E54612, NLRV(7); E205542, NKJH(7); E518407
			CCC, EAC, CE, IEC, CB Scheme
Rated Insulation Voltage U_i	IEC	[V]	690
	UL/CSA	[V]	600
Rated Impulse Withstand Voltage U_{imp}	Pollution degree		3
	Main circuits U_{imp} /Overvoltage Category		6 kV/III, 8 kV (Disconnect)
	Auxiliary circuits U_{imp} /Overvoltage Category		6 kV/III
Rated Frequency		[Hz]	45...65
Utilization Category	IEC 60947-4-1 (Motor starter)		AC-3e
Life Span	Mechanical	[operations]	50,000
	Electrical (I_e max.)	[operations]	50,000
Ambient Temperature	Storage	[°C (°F)]	-40...+85 (-40...185)
	Operation	[°C (°F)]	-25...+70 (-13...158)
Climatic resistance	Operating Humidity/Moisture heat (60068-2-3)		5...95% Non-condensing
Site Altitude		[m]	to 2000 m (6561 ft)
Protection Class			IP2X from all directions
Resistance to Shock, Transport (60068-2-27)	ON		15 G/11 ms
	OFF		30 G/11 ms
Resistance to Vibration, Operation (60068-2-6)			2 G
Rated Thermal Current I_{th}	up to 40 °C (104 °F) ambient temperature	[A]	0.25...40
	up to 60 °C (140 °F) ambient temperature	[A]	0.25...40
Rated Supply Current I_e		[A]	0.25...40
Dependence on Temperature	40 °C (104 °F)	[A]	no reduction
	50 °C (122 °F)	[A]	no reduction
	60 °C (140 °F)	[A]	no reduction
	70 °C (158 °F)	[A]	15% current reduction of the upper rated current I_e
Overload Protection Characteristics			IEC 60947-4-1 Motor protection
Ambient Temperature Compensation		[°C (°F)]	-25...+60 (-13...+140)
Phase-loss Protection			Differential release
Trip class			10, 20
Magnetic Release			fixed setting
Definite Time-Delay Overload Release			12 x I_e
Release current ($\pm 20\%$)	MPCB adjustable thermal magnetic/fixed magnetic	[A]	14 x I_e max.
	MCP fixed magnetic	[A]	—
	Adjustable thermal/fixed magnetic, high inrush	[A]	—
	Fixed magnetic application at output of VFD multi-motor	[A]	—
Main Disconnect Switch Application			Yes, with accessories
Application Conditions	For utilization outside North America, assemblies (of products) shall comply to the IEC 61439-1 requirements		
	140ME manual motor starters are intended for use in closed areas without hazardous operating conditions such as dust or explosive or corrosive gases. Enclosures of appropriate manner need to be in place to protect devices in such environments. See Table 73 .		

Table 72 - Total Power Loss, P_v , Main current path, I_e max, 1-phase

Attribute			Cat. No. 140ME-D_-
Power dissipation • @ operational temperature	0.25...1.0 A	[W]	0.6
	0.63...2.5 A	[W]	0.3
	1.6...6.3 A	[W]	1.2
	4...16 A	[W]	6.5
	16...40 A	[W]	10
Resistance	0.25...1.0 A	[mΩ]	200
	0.63...2.5 A	[mΩ]	16
	1.6...6.3 A	[mΩ]	10
	4...16 A	[mΩ]	8
	16...40 A	[mΩ]	2

Table 73 - Minimum Enclosure Size for 140ME-D Devices

		Application Type				
		480V Group Installation and At-motor Disconnect	600V Group Installation and At-motor Disconnect	480Y/277V Self-protected (Type E) Combination Motor Controller	600Y/347V Self-protected (Type E) Combination Motor Controller	Type F (with Bul. 100-C or 100-E contactor)
All current ranges, 140ME only	[mm]	166 x 108 x 162	166 x 108 x 162	250 x 108 x 162	250 x 108 x 162	See below
	[in]	6.5 x 4.3 x 6.4	6.5 x 4.3 x 6.4	9.8 x 4.3 x 6.4	9.8 x 4.3 x 6.4	
140ME with 100-C09...-C55	[mm]					200 x 70 x 160
	[in]					11 x 2.8 x 6.3
140ME & 100-E09...-E38	[mm]					200 x 70 x 160
	[in]					11 x 2.8 x 6.3
140ME & 100-E40...-E65	[mm]					360 x 70 x 160
	[in]					14.2 x 2.8 x 6.3

Table 74 - MPSD Connecting Characteristics

Connection		No. of Conductors	140ME-D ≤ 16 A	140ME-D ≥ 16 A	
Type of terminals					
			Screw Clamp up to 16 A, M4	Screw Clamp greater than 16 A, M4	
Connection Screw			Pozidriv No. 2/Blade No. 3	Pozidriv No. 2/Blade No. 3	
Wiring	Solid or stranded		1	1..6 mm ²	1.5...10 mm ²
			2	1...2.5 mm ² 2.5...6 mm ²	1.5...4 mm ² 4...10 mm ²
	Flexible with ferrule (end sleeve)		1	1..6 mm ²	1.5...10 mm ²
			2	1...2.5 mm ² 2.5...4 mm ²	1.5...4 mm ² 4...10 mm ²
	Finely stranded		1	1.5...6 mm ²	2.5...10 mm ²
			2	1.5...4 mm ² 2.5...6 mm ²	2.5...6 mm ² 4...10 mm ²
	Cross section per UL/CSA solid, stranded		1	No. 14...10 AWG	No. 14...8 AWG
			2	No. 14...10 AWG	No. 14...10 AWG No. 12...8 AWG
	Stripping length			10 mm (0.39 in.)	10 mm (0.39 in.)
	Tightening torques		[N•m]/[lb•in]	2...2.5/18...22	2...2.5/18...22

Combination Ratings

Bulletin 140ME Devices with Bulletin 100-C IEC Contactors

Table 75 - UL 60947 Application Ratings, MPSDs with Bulletin 100-C IEC Contactors

Cat. No.	UL 60947-4-1 Manual Motor Controller						UL 60947-4-1 Type F Type 1		
	Max. Fuse or Circuit Breaker per NEC [A]	Minimum Contactor Size ⁽¹⁾	Group Motor Installation		Motor Disconnect		Combination Motor Controller		
			Max Short-circuit Current [kA]		Max Short-circuit Current [kA]		Minimum Contactor Size ⁽¹⁾	Max Short-circuit Current [kA]	
			480V	600V	480V	600V		480Y/277V ⁽²⁾	600Y/347V ⁽²⁾
D-Frame									
140ME-D9EE-B10	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-B25	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-B63	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-C16	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-C40	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-B10	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-B25	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-B63	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-C16	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-C40	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
F-Frame									
140ME-F9EE-C80	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-F9EF-C80	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD

(1) Similar for other contactor configurations (100-C, 104-C, 100S-C, 104S-C).

(2) For full voltage (delta) ratings above 277V or 347V, follow the NEC or CEC rules for group motor applications.

Table 76 - UL 60947-4-1 Short-Circuit Current Ratings, 140ME Combination Motor Controller as Type F, Type 2 Combination with 100-C Contactors

Cat. No.	Current Range [A]	Contactor Size ⁽¹⁾	UL 60947-4-1 Type F, Type 2 Combination Motor Controller			
			Max Short-circuit Current [kA]		Max Current Rating [A]	
			480Y/277V	600Y/347V	Fuse	Circuit Breaker
D-Frame						
140ME-D9EE-B10	0.25...1.0 A	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-B25	0.63...2.5 A	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-B63	1.6...6.3 A	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-C16	4...16 A	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-C40	16...40 A	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-B10	0.25...1.0 A	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-B25	0.63...2.5 A	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-B63	1.6...6.3 A	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-C16	4...16 A	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-C40	16...40 A	TBD	TBD	TBD	TBD	TBD
F-Frame						
140ME-F9EE-C80	20...80	TBD	TBD	TBD	TBD	TBD
140ME-F9EF-C80	20...80	TBD	TBD	TBD	TBD	TBD

(1) Similar for other contactor configurations (100-C, 104-C, 100S-C, 104S-C).

Table 77 - IEC 60947-4-1, Type 2 Coordination Ratings, MPSDs with Bulletin 100-C IEC Contactors

Cat. No.			IEC 60947-4-1 Type 2 Coordination						Overload Relay
Standard Motor Protection	High Inrush Motor Protection	Motor Circuit Protection	400V		480V		600V		
			Max Short-circuit Current [kA]	Min Contactor Size ⁽¹⁾	Max Short-circuit Current [kA]	Min Contactor Size ⁽¹⁾	Max Short-circuit Current [kA]	Min Contactor Size ⁽¹⁾	
D-Frame									
140ME-D9EE-B10	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-B25	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-B63	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-C16	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-C40	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-B10	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-B25	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-B63	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-C16	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-C40	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
F-Frame							TBD	TBD	TBD
140ME-F9EE-C80	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-F9EF-C80	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD

(1) Similar for other contactor configurations (100-C, 104-C, 100S-C, 104S-C).

Bulletin 140ME Devices with Bulletin 100-E IEC Contactors

Table 78 - UL 60947 Application Ratings, MPSDs with Bulletin 100-C IEC Contactors

Cat. No.	UL 60947-4-1 Manual Motor Controller						UL 60947-4-1 Type F Type 1		
	Max. Fuse or Circuit Breaker per NEC [A]	Minimum Contactor Size ⁽¹⁾	Group Motor Installation		Motor Disconnect		Combination Motor Controller		
			Max Short-circuit Current [kA]		Max Short-circuit Current [kA]		Minimum Contactor Size ⁽¹⁾	Max Short-circuit Current [kA]	
			480V	600V	480V	600V		480Y/277V ⁽²⁾	600Y/347V ⁽²⁾
D-Frame									
140ME-D9EE-B10	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-B25	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-B63	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-C16	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-C40	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-B10	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-B25	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-B63	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-C16	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-C40	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
F-Frame									
140ME-F9EE-C80	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
140ME-F9EF-C80	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD

(1) Similar for other contactor configurations (100-E, 104-E).

(2) For full voltage (delta) ratings above 277V or 347V, follow the NEC or CEC rules for group motor applications.

Table 79 - UL 60947-4-1 Short-Circuit Current Ratings, 140ME Combination Motor Controller as Type F, Type 2 Combination with 100-E Contactors

Cat. No.	Current Range [A]	Contactor Size ⁽¹⁾	UL 60947-4-1 Type F, Type 2 Combination Motor Controller			
			Max Short-circuit Current [kA]		Max Current Rating [A]	
			480Y/277V	600Y/347V	Fuse	Circuit Breaker
D-Frame						
140ME-D9EE-B10	0.25...1.0 A	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-B25	0.63...2.5 A	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-B63	1.6...6.3 A	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-C16	4...16 A	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-C40	16...40 A	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-B10	0.25...1.0 A	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-B25	0.63...2.5 A	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-B63	1.6...6.3 A	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-C16	4...16 A	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-C40	16...40 A	TBD	TBD	TBD	TBD	TBD
F-Frame						
140ME-F9EE-C80	20...80	TBD	TBD	TBD	TBD	TBD
140ME-F9EF-C80	20...80	TBD	TBD	TBD	TBD	TBD

(1) Similar for other contactor configurations (100-E, 104-E, 100S-E).

Table 80 - IEC 60947-4-1, Type 2 Coordination Ratings, MPSDs with Bulletin 100-E IEC Contactors

Cat. No.			IEC 60947-4-1 Type 2 Coordination		Overload Relay
Standard Motor Protection	High Inrush Motor Protection	Motor Circuit Protection	415V		
			Max Short-circuit Current [kA]	Min Contactor Size ⁽¹⁾	
D-Frame					
140ME-D9EE-B10	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-B25	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-B63	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-C16	TBD	TBD	TBD	TBD	TBD
140ME-D9EE-C40	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-B10	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-B25	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-B63	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-C16	TBD	TBD	TBD	TBD	TBD
140ME-D9EF-C40	TBD	TBD	TBD	TBD	TBD
F-Frame					
140ME-F9EE-C80	TBD	TBD	TBD	TBD	TBD
140ME-F9EF-C80	TBD	TBD	TBD	TBD	TBD

(1) Similar for other contactor configurations (100-E, 104-E, 100S-E).

Accessory Specifications

Table 81 - Auxiliary Contact Specifications—140ME-D... Devices

Attribute				Front-mounted Auxiliary Contacts	Right Side-mounted Auxiliary Contacts
Rated Thermal Current I_{th}	at 40 °C (104 °F) ambient temperature		[A]	5	10
	at 60 °C (140 °F) ambient temperature		[A]	4	6
Back-up Fuses gG, gL			[A]	10	10
General Use current			[A]	5	10
Rated insulation voltage U_i	IEC		[V]	250	690
	UL/CSA		[V]	240	600
Contact rating code designation (UL/CSA)			AC	B300	A600
			DC	R300	Q600
Rated Supply Current I_e	AC-15	24V	[A]	4	6
		120V	[A]	3	6
		240V	[A]	1.5	3
		415V	[A]	—	2
		690V	[A]	—	1
	DC-13	24V	[A]	1.2	2
		125V	[A]	0.22	0.55
		250V	[A]	0.11	0.27
		400V	[A]	—	0.15
		500V	[A]	—	0.13
Type of Terminals					
Recommended screwdriver			Pozidriv No. 2/Blade No. 3	Pozidriv No. 2/Blade No. 3	
Solid		1 or 2 conductors	0.5...1.5 mm ²	0.5...2.5 mm ² /No. 18...14 AWG	
Flexible with ferrule		1 or 2 conductors	0.5...1.5 mm ²	1.0...2.5 mm ² /No. 18...14 AWG	
Flexible with insulated ferrule		1 or 2 conductors	0.5...1.5 mm ²	0.5...2.5 mm ² /No. 18...14 AWG	
Finely stranded per UL/CSA		1 or 2 conductors	0.75...1.5 mm ² /	1.0...2.5 mm ² /No. 18...14 AWG	
Cross section per UL/CSA, solid, stranded		1 or 2 conductors	No. 18...14 AWG	No. 18...14 AWG	
Stripping length			9 mm (0.35 in)	10 mm (0.39 in)	
Conductor steps			Max 2 conductor steps allowed	Max 2 conductor steps allowed	
Tightening torque			1...1.2 N•m/8.9...10.6 lb•in	1...1.2 N•m/8.9...10.6 lb•in1...1.2	
Degree of protection per IEC 60529			IP2X	IP2X	

Table 82 - Undervoltage and Shunt Trip Specifications—140ME-D... Devices

Attribute				Undervoltage Trip for Left-side Mounting Cat. No. 140MT-C-UX	Shunt Trip for Left-side Mounting Cat. No. 140MT-C-SN
Actuating Voltage	Pick-up		[V]	$0.85...1.1 \times U_s$	$0.7...1.1 \times U_s$
	Drop-out		[V]	$0.7...0.35 \times U_s$	$0.7...1.1 \times U_s$
Rated AC Control Voltage	140MT-C-UXK	50 Hz	[V AC]	24	—
		60 Hz	[V AC]	28	—
	140MT-C-UXD	50 Hz	[V AC]	110	—
		60 Hz	[V AC]	120	—
	140MT-C-UXF	50 Hz	[V AC]	220...230	—
		60 Hz	[V AC]	—	—
	140MT-C-UXA	50 Hz	[V AC]	—	—
		60 Hz	[V AC]	240...260	—
	140MT-C-UXN	50 Hz	[V AC]	380...400	—
		60 Hz	[V AC]	440...460	—
	140MT-C-UXB	50 Hz	[V AC]	415	—
		60 Hz	[V AC]	480	—
	140MT-C-SNK	50 Hz	[V AC]	—	24
		60 Hz	[V AC]	—	24...28
	140MT-C-SND	50 Hz	[V AC]	—	110
		60 Hz	[V AC]	—	120
	140MT-C-SNF	50 Hz	[V AC]	—	220...230
		60 Hz	[V AC]	—	—
	140MT-C-SNA	50 Hz	[V AC]	—	—
		60 Hz	[V AC]	—	240...260
	140MT-C-SNT	50 Hz	[V AC]	—	240
		60 Hz	[V AC]	—	277
	140MT-C-SNN	50 Hz	[V AC]	—	380...400
		60 Hz	[V AC]	—	440...460
	140MT-C-SNB	50 Hz	[V AC]	—	415
		60 Hz	[V AC]	—	480
	On-time			Continuous duty	Continuous duty
	Coil consumption	Pick-up	[VA/W]	14/10	14/10
		Hold-in	[VA/W]	4/2	4/2
Rated DC Control Voltage	140MT-C-SNZJ		[V DC]	—	24
	On-time				Max 5 s
	Coil consumption	Pick-up	[W]		50
Type of Terminals					
Recommended screwdriver				Pozidriv No. 2/Blade No. 3	Pozidriv No. 2/Blade No. 3
Solid		1 or 2 conductors		$0.5...2.5 \text{ mm}^2$	$0.5...2.5 \text{ mm}^2$
Flexible with ferrule		1 or 2 conductors		$0.5...2.5 \text{ mm}^2$	$0.5...2.5 \text{ mm}^2$
Flexible with insulated ferrule		1 or 2 conductors		$0.5...2.5 \text{ mm}^2$	$0.5...2.5 \text{ mm}^2$
Finely stranded per UL/CSA		1 or 2 conductors		$0.75...2.5 \text{ mm}^2$	$0.75...2.5 \text{ mm}^2$
Cross section per UL/CSA, solid, stranded		1 or 2 conductors		No. 18...14 AWG	No. 18...14 AWG
Stripping length				9 mm (0.35 in)	10 mm (0.39 in)
Conductor steps				Max 2 conductor steps allowed	Max 2 conductor steps allowed
Tightening torque				$1...1.2 \text{ N}\cdot\text{m}/8.9...10.6 \text{ lb}\cdot\text{in}$	$1...1.2 \text{ N}\cdot\text{m}/8.9...10.6 \text{ lb}\cdot\text{in}...1.2$
Degree of protection per IEC 60529				IP2X	IP2X

Table 83 - Feeder Terminals

		Compact Busbar Feeder Terminal		Compact Busbar
		140MT-C-WTEN		140MT-C-W... ⁽¹⁾
Rated Thermal Current I_{th} at 60 °C (140 °F) ambient temperature	[A]	64		64
Flexible with insulated ferrule 	1 conductor	2.5...25 mm ²		—
Stranded per UL/CSA 	1 conductor	16...25 mm ² /No. 16...4 AWG		—
Solid 	1 conductor	2.5...10 mm ² /No. 16...8 AWG		—
De-isolation (stripping) length	[mm (in)]	14 (0.55)		—
Tightening torque		3...3.5 N•m/27...31 lb•in		—

(1) Rated thermal current is 57 A at 70 °C (158 °F) ambient temperature.

Table 84 - Feeder Blocks for Compact Busbars

		IEC 60947/UL 60947/CAN/CSA-C22.2 No. 60947	
		140MT-C-WBE; L1, L2, L3	140MT-C-WBE; T1, T2, T3
Rated Thermal Current I_{th} at 60 °C (140 °F) ambient temperature	[A]	64	
Flexible with insulated ferrule 	1 conductor	4...35 mm ² /No. 10...2 AWG	1...10 mm ² /No. 16...8 AWG for use with 64 A and 92 A busbar
Flexible 	1 conductor	4...35 mm ² /No. 10...2 AWG	1...10 mm ² /No. 16...8 AWG for use with 64 A and 92 A busbar
Stranded per UL/CSA 	1 conductor	4...35 mm ² /No. 10...2 AWG	1...10 mm ² /No. 16...8 AWG for use with 64 A and 92 A busbar
Solid 	1 conductor	2.5...35 mm ² /No. 14...2 AWG	1...10 mm ² /No. 16...8 AWG for use with 64 A and 92 A busbar
De-isolation (stripping) length	[mm (in)]	14 (0.55)	10 (0.39)
Tightening torque		3...3.5 N•m (27...31 lb•in)	2...2.5 N•m (18...22 lb•in)

Time-Current Characteristic

Figure 55 - Motor Protective Switching Devices Time-Current Characteristic, 140ME..., 10...40 A Devices


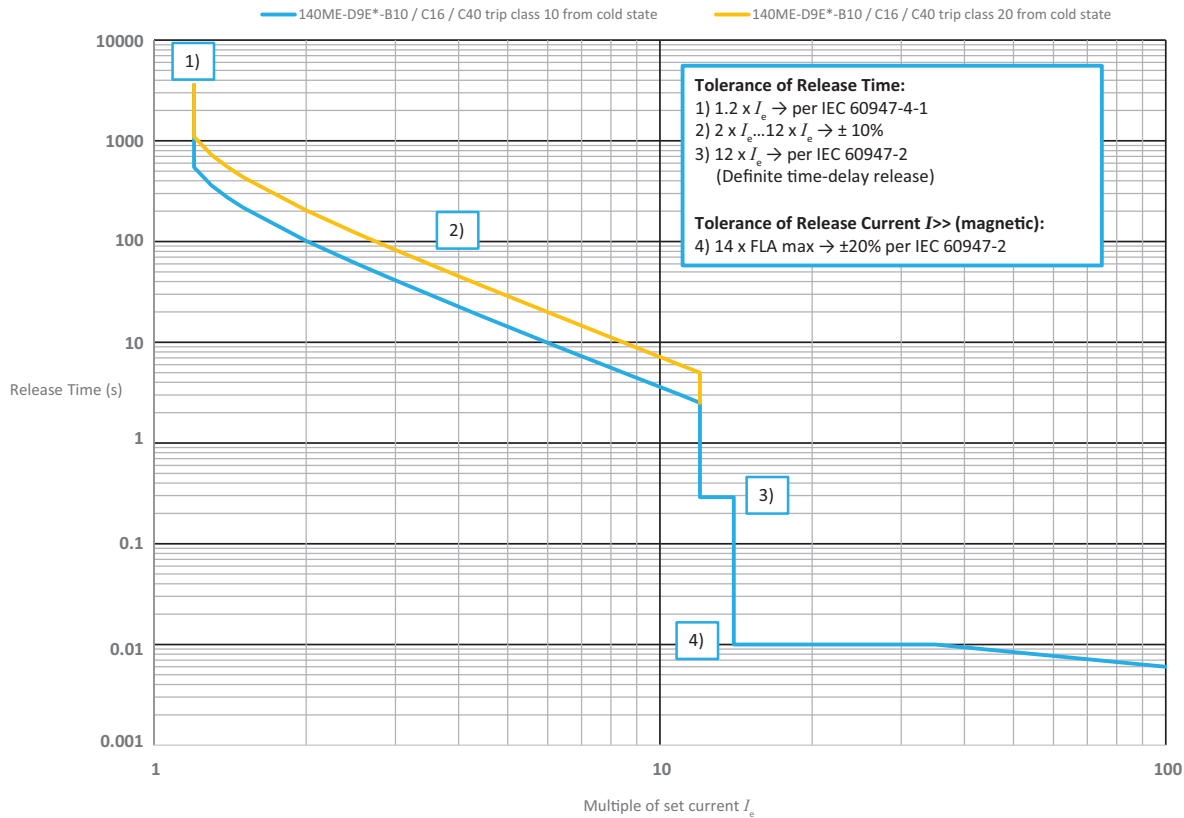


Figure 56 - Motor Protective Switching Devices Time-Current Characteristic, 140ME..., 25...63 A Devices

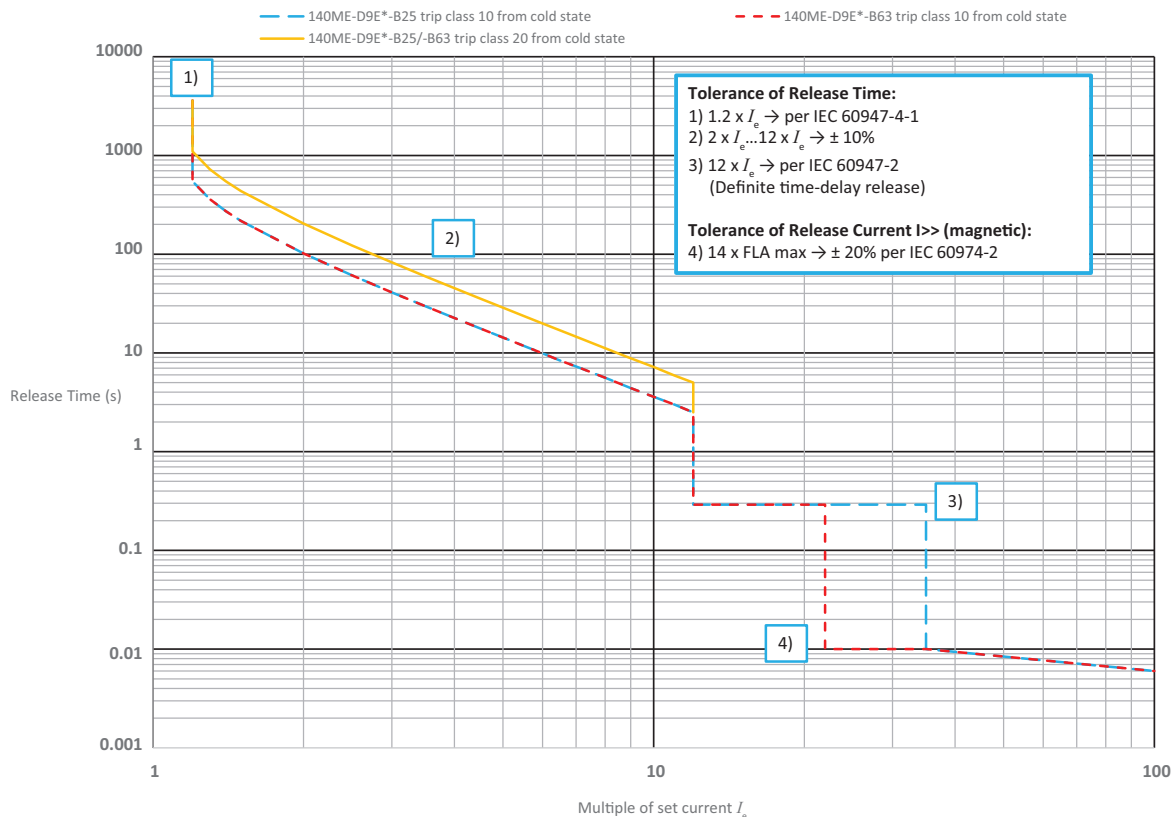

Thermal Release Trip Current

The adjustable current transformer release protects motors against overload. The curve shows the mean operating current at an ambient temperature of 20 °C (68 °F) starting from the cold state. Careful testing and setting ensures effective motor protection even in the case of single phasing. The overload characteristic is also valid for transformer protection.

Definite Time-Delay Release Trip Current

The definite time-delay overload release trips at $\geq 12 \times I_e$ within 0.3 seconds.

Magnetic Release Trip Current

The instantaneous magnetic trip has a fixed operating current setting. This corresponds to 13...14 times the maximum value of the setting range. At a lower setting, it is correspondingly higher.

Current Setting $I_e F$


The overload trip corresponds to a thermal overload relay in a motor starter conforming to IEC 60947-4-1. If a different value is prescribed (for example, reduced I_e for cooling medium having a temperature higher than 40 °C (104 °F) or a place of installation higher than 2000 m (6561 ft) above sea level), the setting current is equal to the reduced rated current I_e of the motor.

Approximate Dimensions

Dimensions are in millimeters (inches) and are not intended for manufacturing purposes.

140ME-D Devices and Accessories

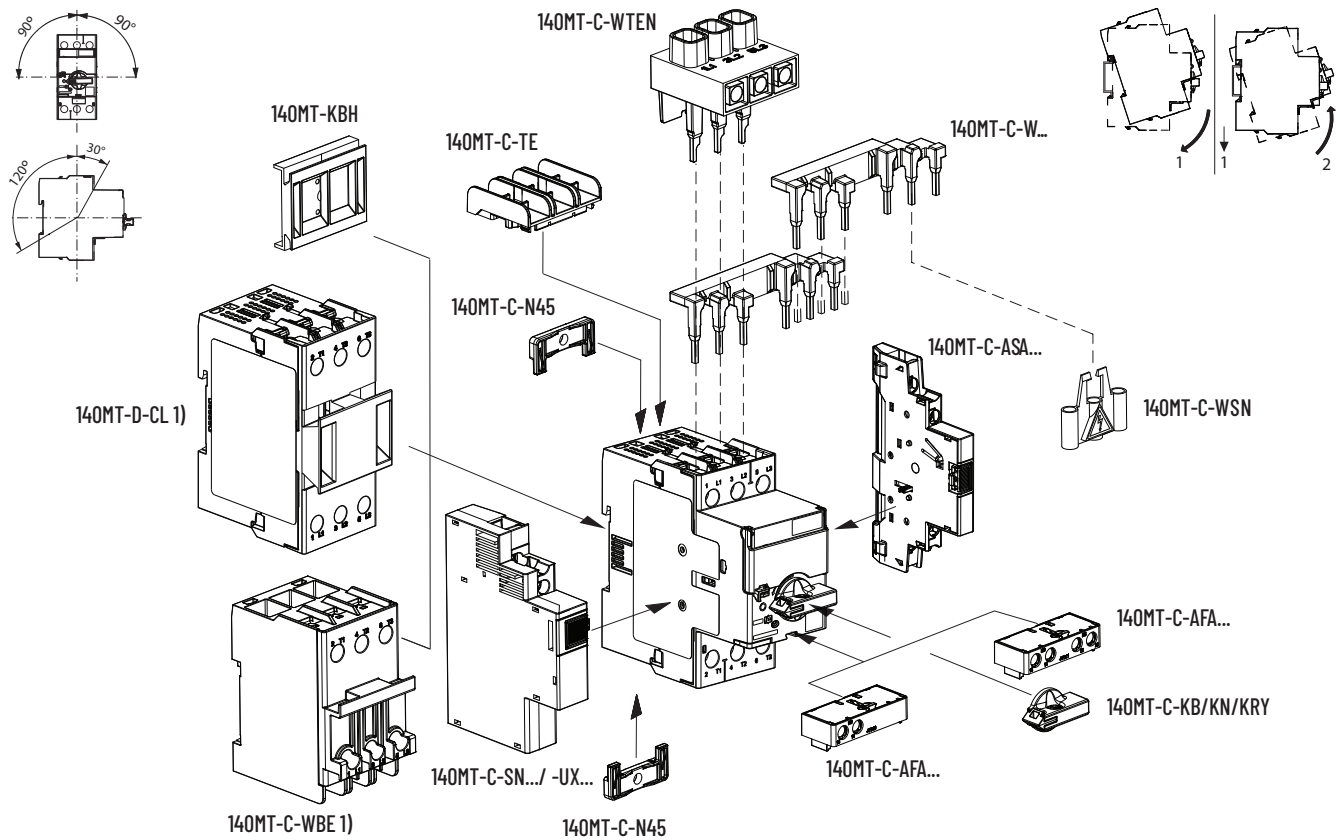Figure 57 - Assembly Diagram



(1) Can be mounted under or next to the MPSD.

Figure 58 - Mounting Position



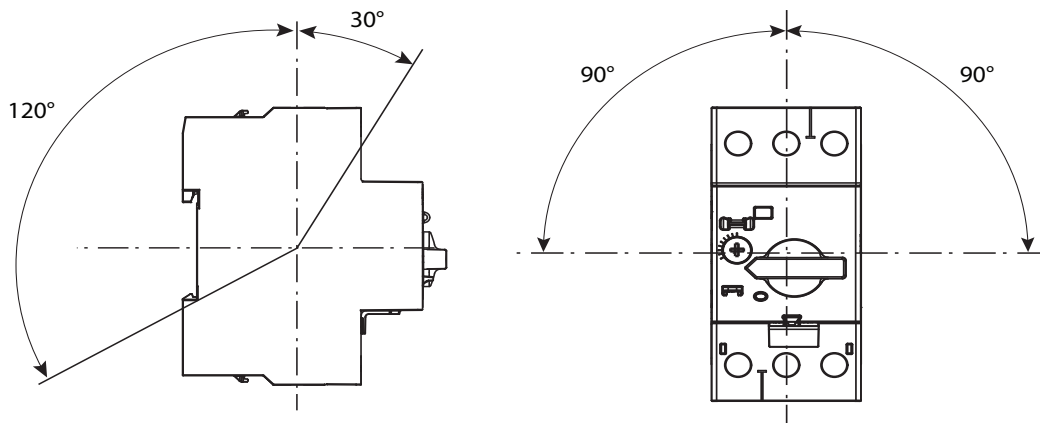


Figure 59 - Spacing Requirements

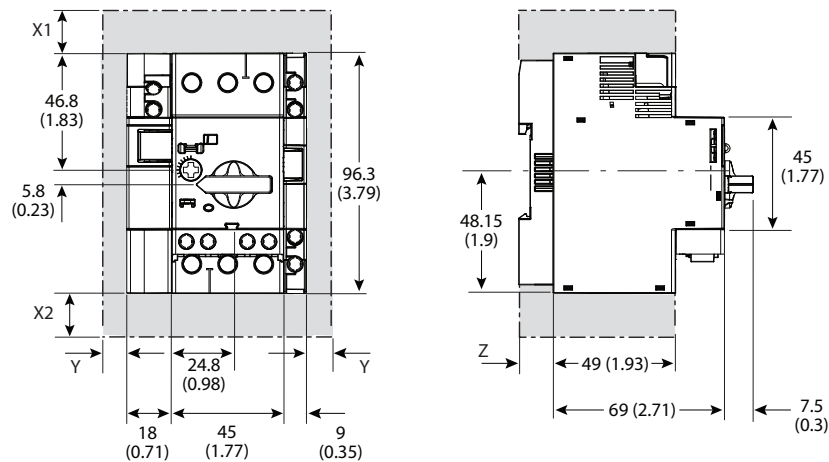

Frame Size	Voltage [V AC]	Minimum Distance to Grounded Parts or Walls [mm (in)]			Z
		X1	X2	Y	
D-Frame	400	30 (1-3/16)	30 (1-3/16)	9 (23/64)	13.5 (17/32)
	500	30 (1-3/16)	30 (1-3/16)	9 (23/64)	
	690	50 (1-31/32)	50 (1-31/32)	30 (1-3/16)	

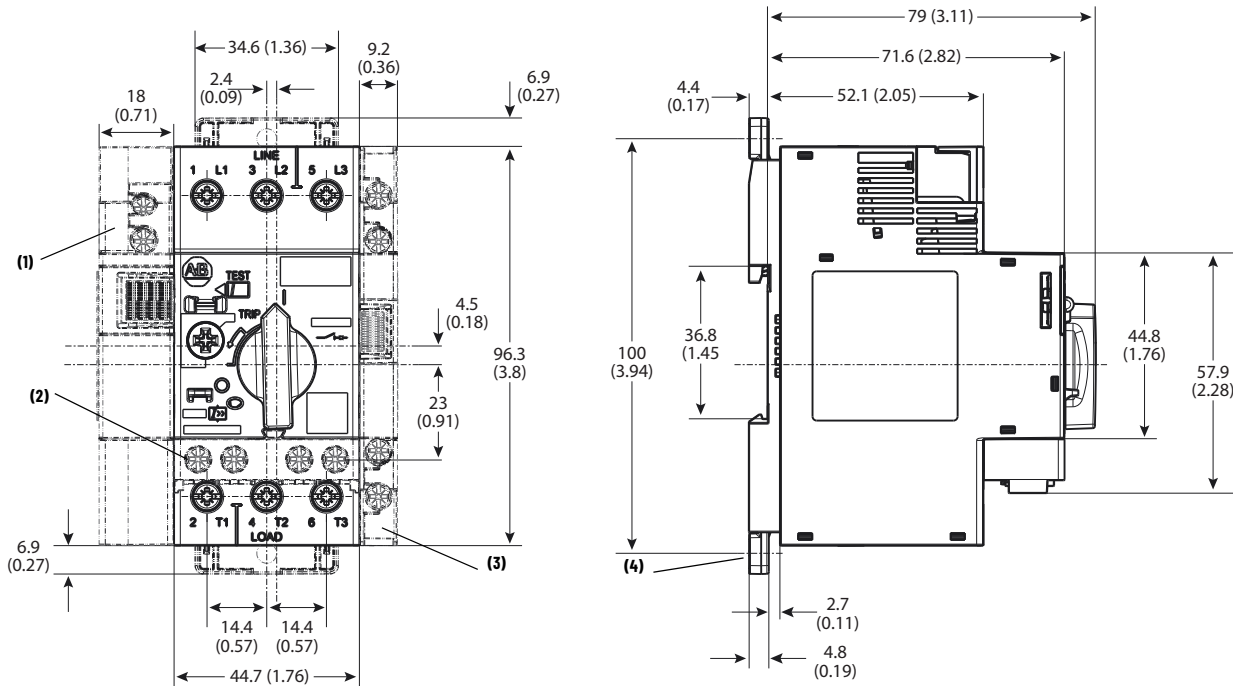Figure 60 - Motor Protective Switching Device (D-Frame), Cat. No. 140ME...



Note	Information
1	Undervoltage/shunt trip
2	Auxiliary contact (front mounted)

Note	Information
3	Auxiliary contact (side mounted)
4	Screw mounting adapter

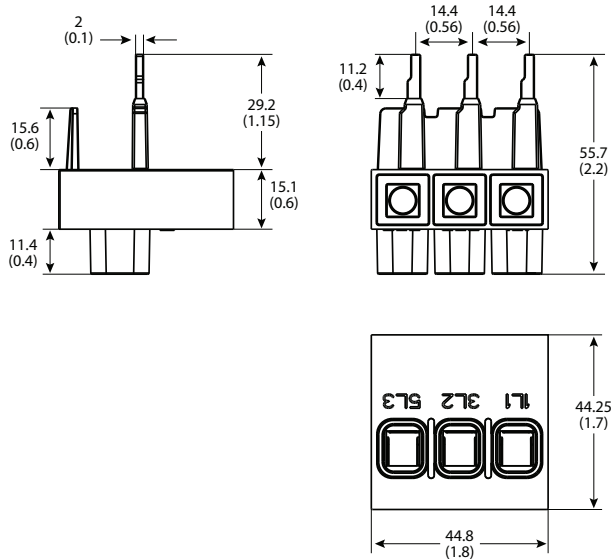
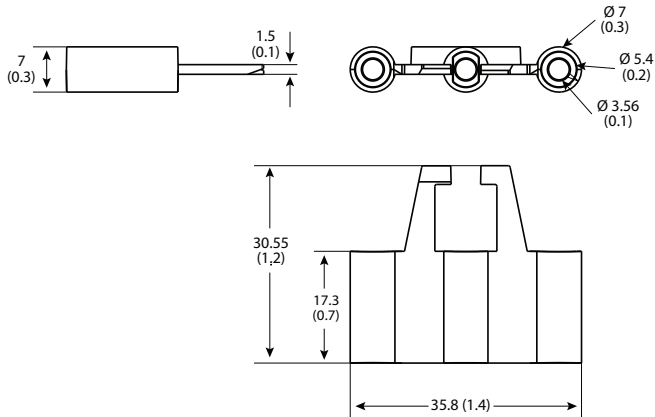
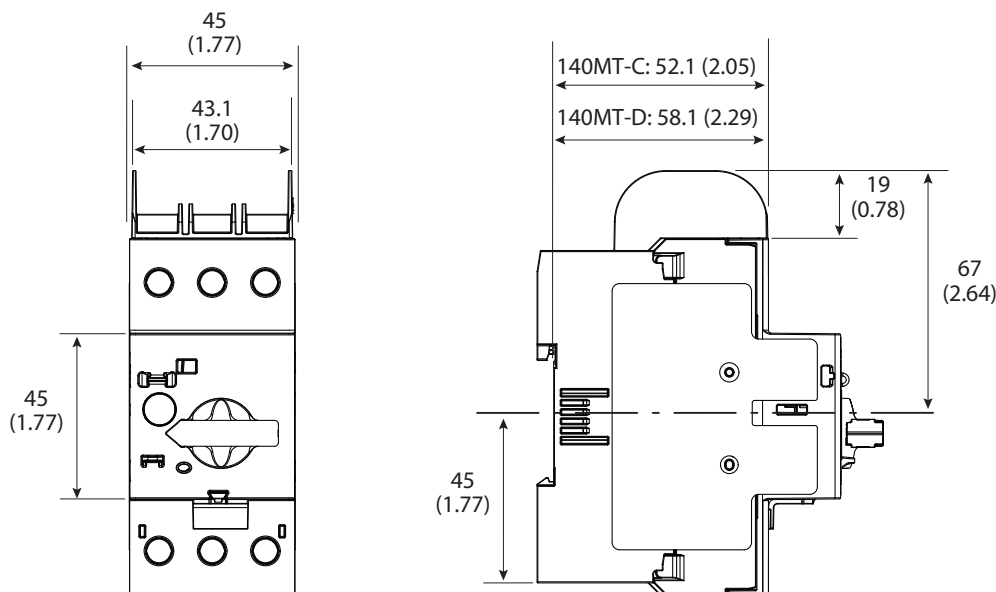
Figure 61 - Feeder Terminal for Compact Busbar, Cat. No. 140MT-C-WTEN**Figure 62 - Terminal Cover, Cat. No. 140MT-C-WSN****Figure 63 - 140ME-D with Cat. No. 140MT-C-TE Type E Adapter**

Figure 64 - Overload Relay Protection Module, Cat. No. 140ME-OLRF


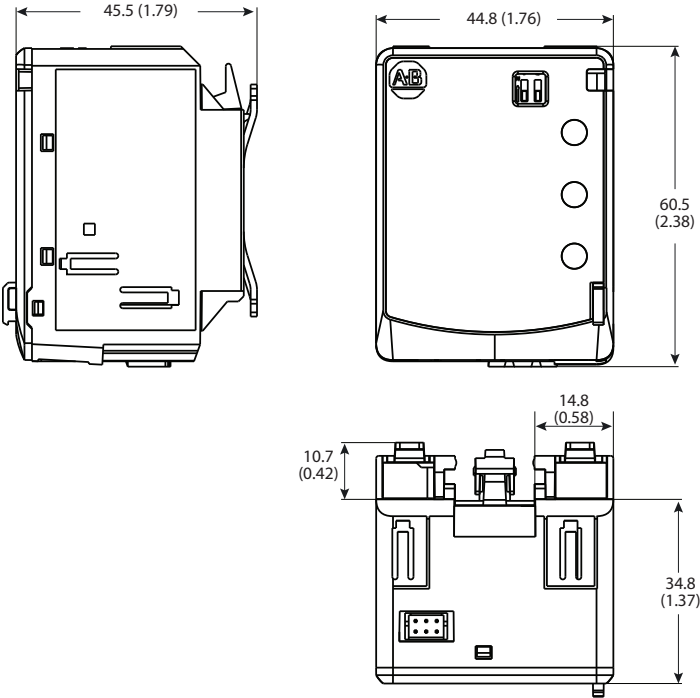


Figure 65 - Current Limiter, Cat. No. 140MT-D-CL with 140ME

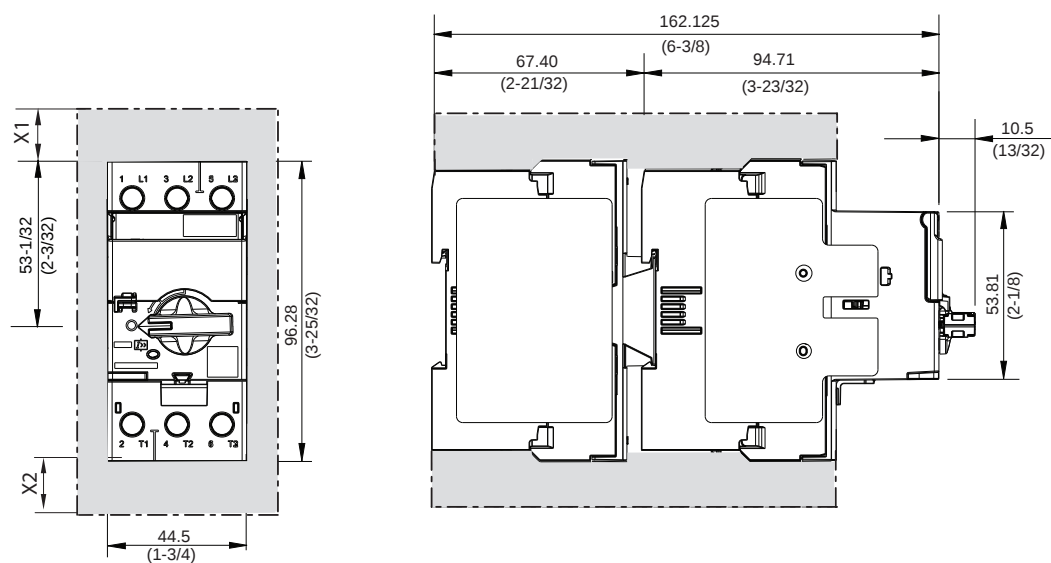

(1) Minimum clearance to grounded parts or walls ($X1$, $X2$)

Voltage	X1	X2
400	30 (1-3/16)	30 (1-3/16)
500	30 (1-3/16)	30 (1-3/16)
690	50 (1-31/32)	50 (1-31/32)

Notes:

Additional Resources

These documents contain additional information concerning related products from Rockwell Automation. You can view or download publications at rok.auto/literature.

Resource	Description
Short-circuit Current Ratings and Your Industrial Control Panel, publication SCCR-AT002	Provides examples for short-circuit current ratings of panels based on the methods stated in UL 508A Supplement B
Molded Case Circuit Breaker Specifications, publication 14OUT-TD001	Provides product selection and specification information for Bulletin 14OUT-D molded case circuit breakers.
IEC Contactor Specifications, publication 100-TD013	Provides product selection and specification information for IEC contactors.
UL Standards Listing for Industrial Control Products, publication CMPNTS-SR002	Assists original equipment manufacturers (OEMs) with construction of panels, to help ensure that they conform to the requirements of Underwriters Laboratories.
American Standards, Configurations, and Ratings: Introduction to Motor Circuit Design, publication IC-AT001	Provides an overview of American motor circuit design based on methods that are outlined in the NEC.
Industrial Components Preventive Maintenance, Enclosures, and Contact Ratings Specifications, publication IC-TD002	Provides a quick reference tool for Allen-Bradley industrial automation controls and assemblies.
Safety Guidelines for the Application, Installation, and Maintenance of Solid-state Control, publication SGI-1.1	Designed to harmonize with NEMA Standards Publication No. ICS 1.1-1987 and provides general guidelines for the application, installation, and maintenance of solid-state control in the form of individual devices or packaged assemblies incorporating solid-state components.
Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1	Provides general guidelines for installing a Rockwell Automation industrial system.
ProposalWorks™ configuration software, rok.auto/systemtools	Helps configure complete, valid catalog numbers and build complete quotes based on detailed product information.
Product Compatibility and Download Center at rok.auto/pcdc	Download the most current version of the Add-on Profile.
Rockwell Automation Global SCCR tool, rok.auto/sccr	Provides coordinated high-fault branch circuit solutions for motor starters, soft starters, and component drives.
Product Certifications website, rok.auto/certifications	Provides declarations of conformity, certificates, and other certification details.

Rockwell Automation Support

Use these resources to access support information.

Technical Support Center	Find help with how-to videos, FAQs, chat, user forums, Knowledgebase, and product notification updates.	rok.auto/support
Local Technical Support Phone Numbers	Locate the telephone number for your country.	rok.auto/phonesupport
Technical Documentation Center	Quickly access and download technical specifications, installation instructions, and user manuals.	rok.auto/techdocs
Literature Library	Find installation instructions, manuals, brochures, and technical data publications.	rok.auto/literature
Product Compatibility and Download Center (PCDC)	Download firmware, associated files (such as AOP, EDS, and DTM), and access product release notes.	rok.auto/pcdc

Documentation Feedback

Your comments help us serve your documentation needs better. If you have any suggestions on how to improve our content, complete the form at rok.auto/docfeedback.

Allen-Bradley, expanding human possibility, and Rockwell Automation are trademarks of Rockwell Automation, Inc.

EtherNet/IP is a trademark of ODVA, Inc.

Trademarks not belonging to Rockwell Automation are property of their respective companies.

Rockwell Automation maintains current product environmental compliance information on its website at rok.auto/pec.

Rockwell Automation NV Commercial Registration Number 0424.293.935

Rockwell Otomasyon Ticaret A.Ş. Kar Plaza İş Merkezi E Blok Kat:6 34752, İçerenköy, İstanbul, Tel: +90 (216) 5698400 EEE Yönetmeliğine Uygundur

Connect with us.    

rockwellautomation.com — expanding **human possibility**[®]

AMERICAS: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000

EUROPE/MIDDLE EAST/AFRICA: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2663 0600

ASIA PACIFIC: Rockwell Automation SEA Pte Ltd, 2 Corporation Road, #04-05, Main Lobby, Corporation Place, Singapore 618494, Tel: (65) 6510 6608

UNITED KINGDOM: Rockwell Automation Ltd., Pitfield, Kiln Farm, Milton Keynes, MK11 3DR, United Kingdom, Tel: (44)(1908) 838-800

Publication 140-TD005L-EN-P - May 2026

Supersedes Publication 140-TD005K-EN-P - March 2026

Copyright © 2026 Rockwell Automation, Inc. All rights reserved. Printed in the U.S.A.