


109-C30AA-A2G-1-4R

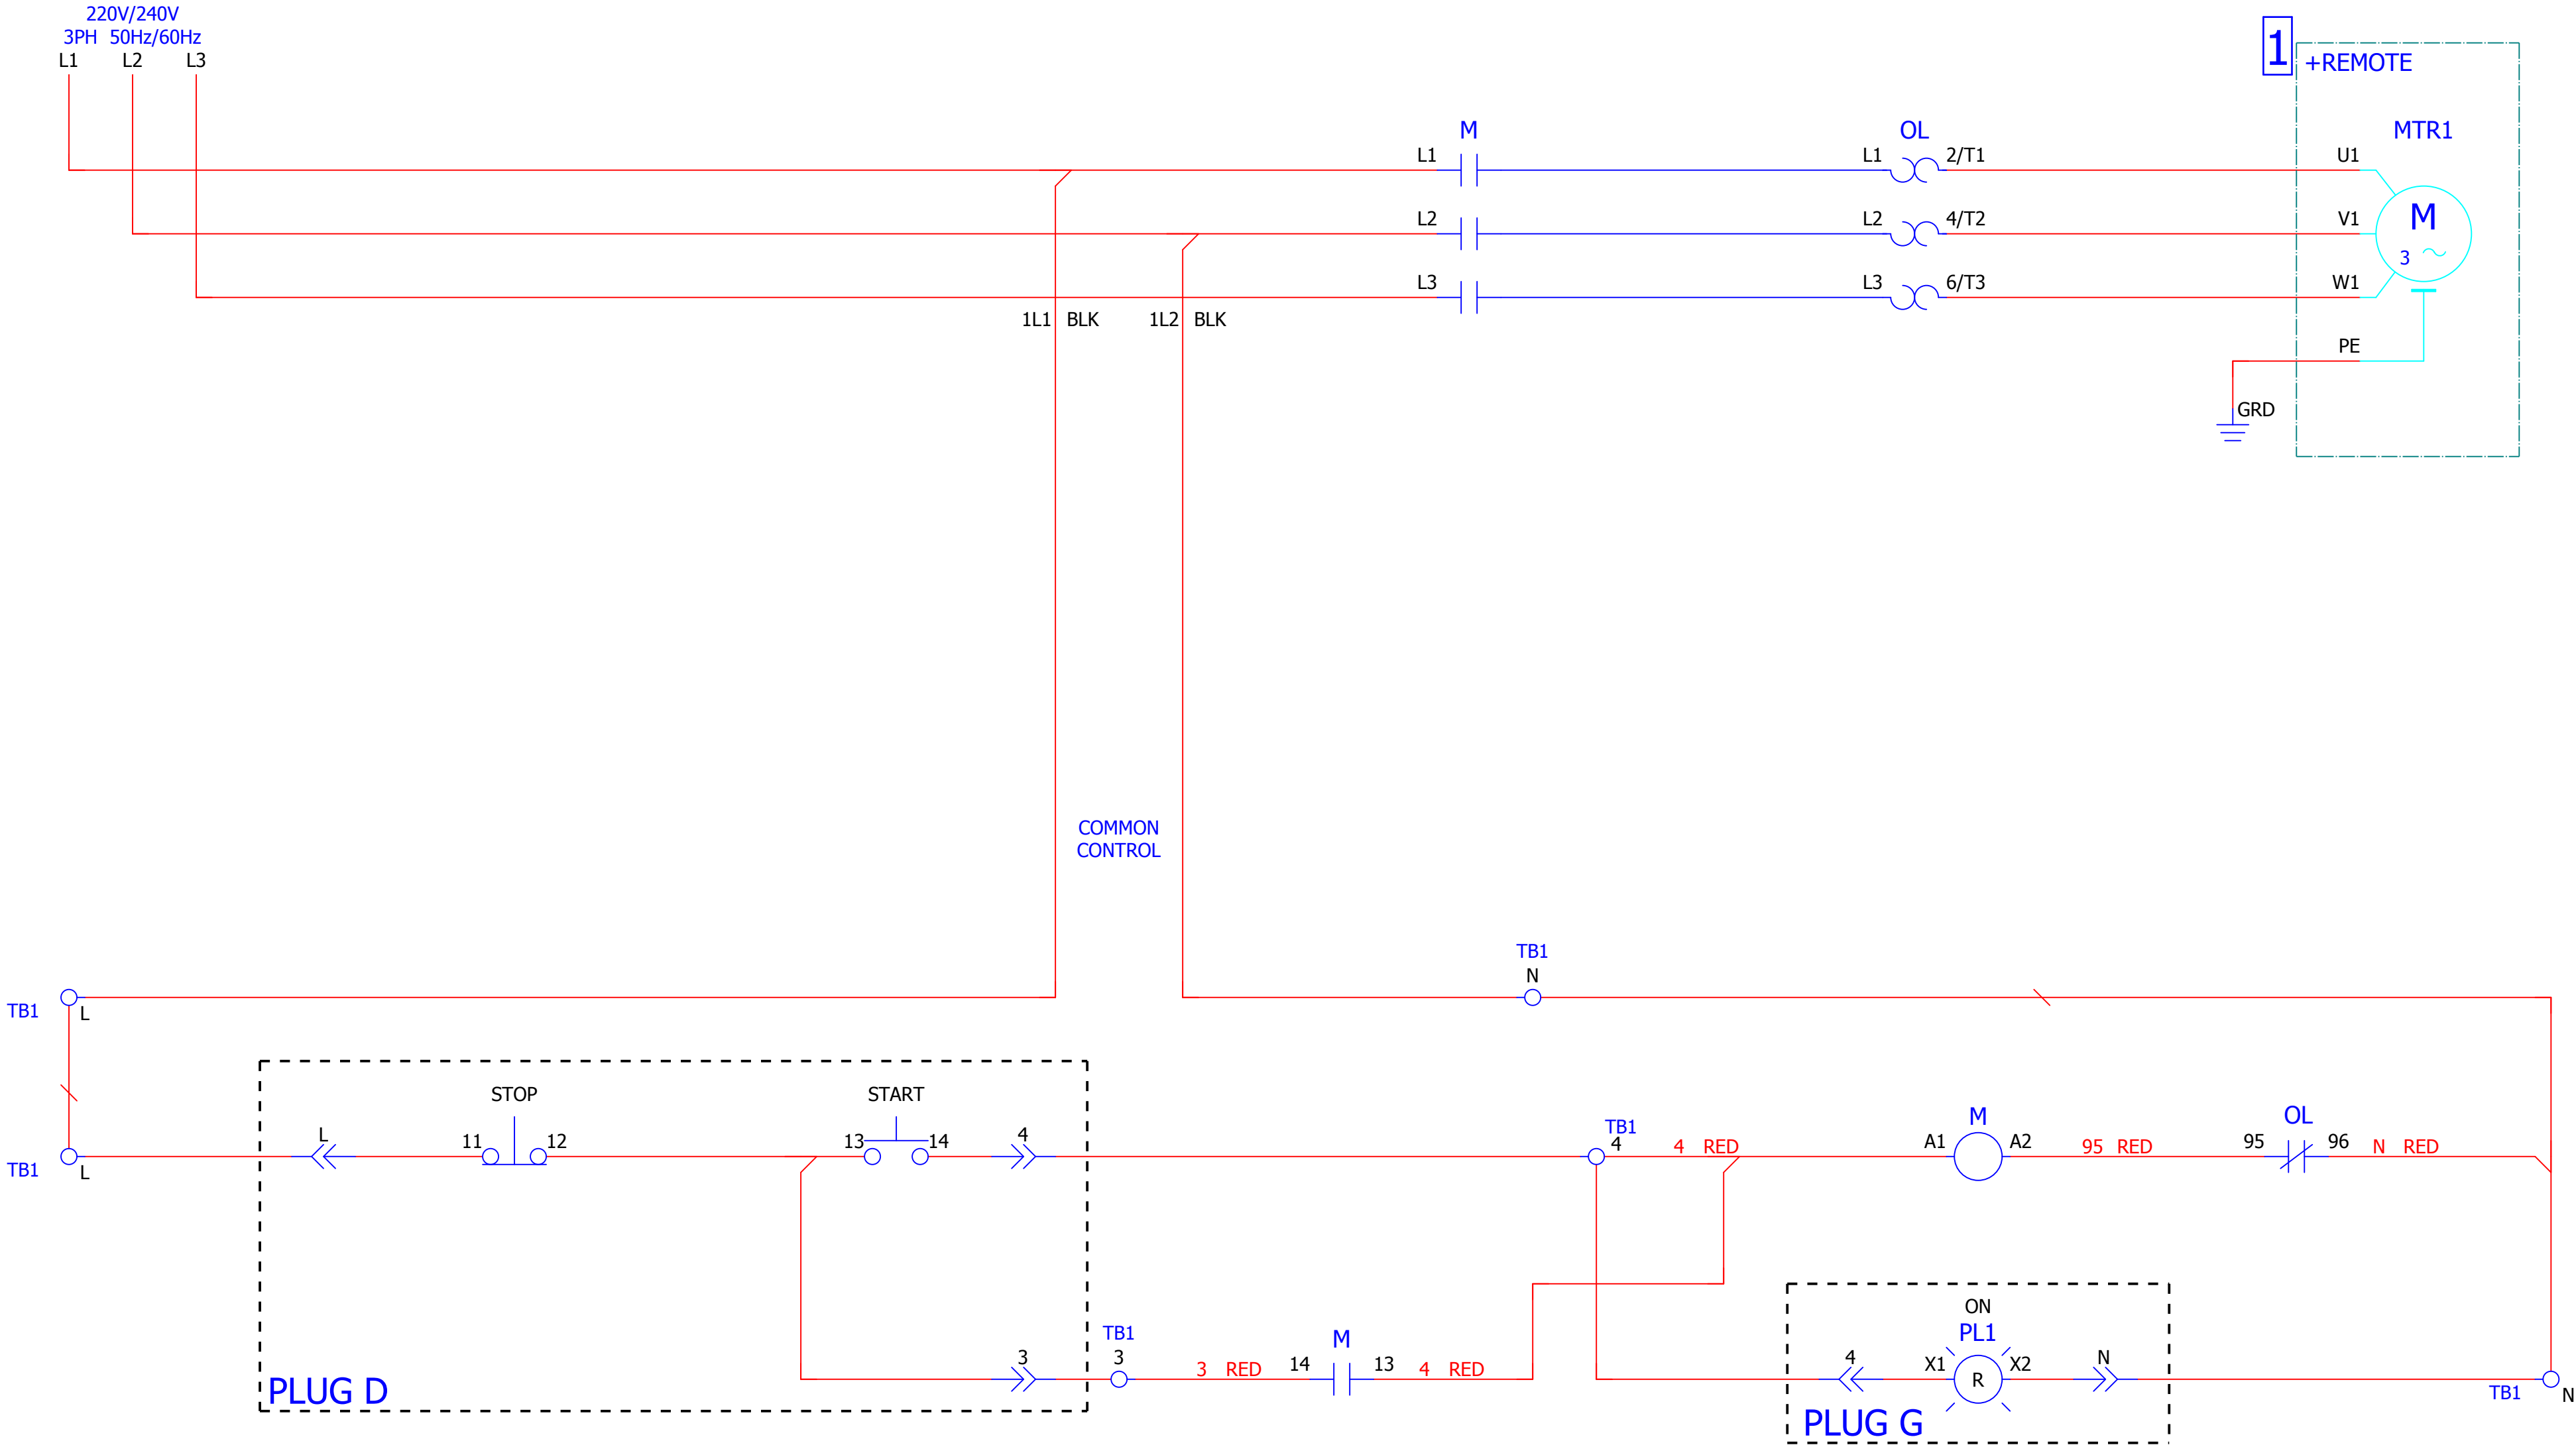

NOTES:

- 1  
REMOTE DEVICE
- 2  
OPTIONAL DEVICE
- 3  
THIS DEVICE MAY BE SUPPLIED LESS AN OVERLOAD RELAY. IT IS THE CUSTOMER'S RESPONSIBILITY TO SUPPLY AN OVERLOAD RELAY AND MAKE THE APPROPRIATE CONNECTIONS.  
WARNING: A MOTOR CONNECTED WITH 2-WIRE CONTROL MAY START AUTOMATICALLY WHEN USED WITH AN AUTOMATIC RESET OVERLOAD RELAY
- 4  
ADDITIONAL CONTROL CIRCUIT OVERCURRENT PROTECTION MAY BE REQUIRED. REFER TO "NEC" AND/OR CANADIAN ELEC1RICAL CODE.
- 5  
ORIENTATION OF OVERLOAD RELAY CONTACTS MAY CHANGE DEPENDING ON EUTECTIC, BI-METALIC, OR E1 PLUS OVERLOAD RELAY.
- 6  
CUSTOMER INSTALLED

| Wire Connector Torque     |                           |
|---------------------------|---------------------------|
| Line Terminal<br>(Lb.In.) | Load Terminal<br>(Lb.In.) |
| 22...31                   | 22..30                    |

**Rockwell Automation**

Title:  
IEC NON COMBO

S.O.

CATALOG NO.  
**109-C30AA-A2G-1-4R**

Drawn by: AUTO\_GEN

Date: 08/24/17

Sheet: 1 of 2

Ver: 00

Size: D