


1		2				3				4				5		6		7		8	
CATALOG NUMBER	MATERIAL MASTER	L	A	B	C	D	E	F	G	H	T	"A1" QTY	"A2" QTY	FLATNESS -A-	WEIGHT kg/(LBS)	POWER CABLE (SEE BELOW)					
LDL-N075480-DHT20	PN-39149										8.30				3.32	18					
LDL-N075480-EHT20	PN-39150	496.0	120.00	200.00	240.00	320.00	360.00	440.00	420.00	486.00	[.33]	16	8	0.64	[7.32]	20					
LDL-T075480-DHT20	PN-39151	[19.53]	[4.724]	[7.874]	[9.449]	[12.598]	[14.173]	[17.323]	[16.535]	[19.134]	10.80			[.025]	4.16	18					
LDL-T075480-EHT20	PN-39152										[.43]				[9.18]	20					

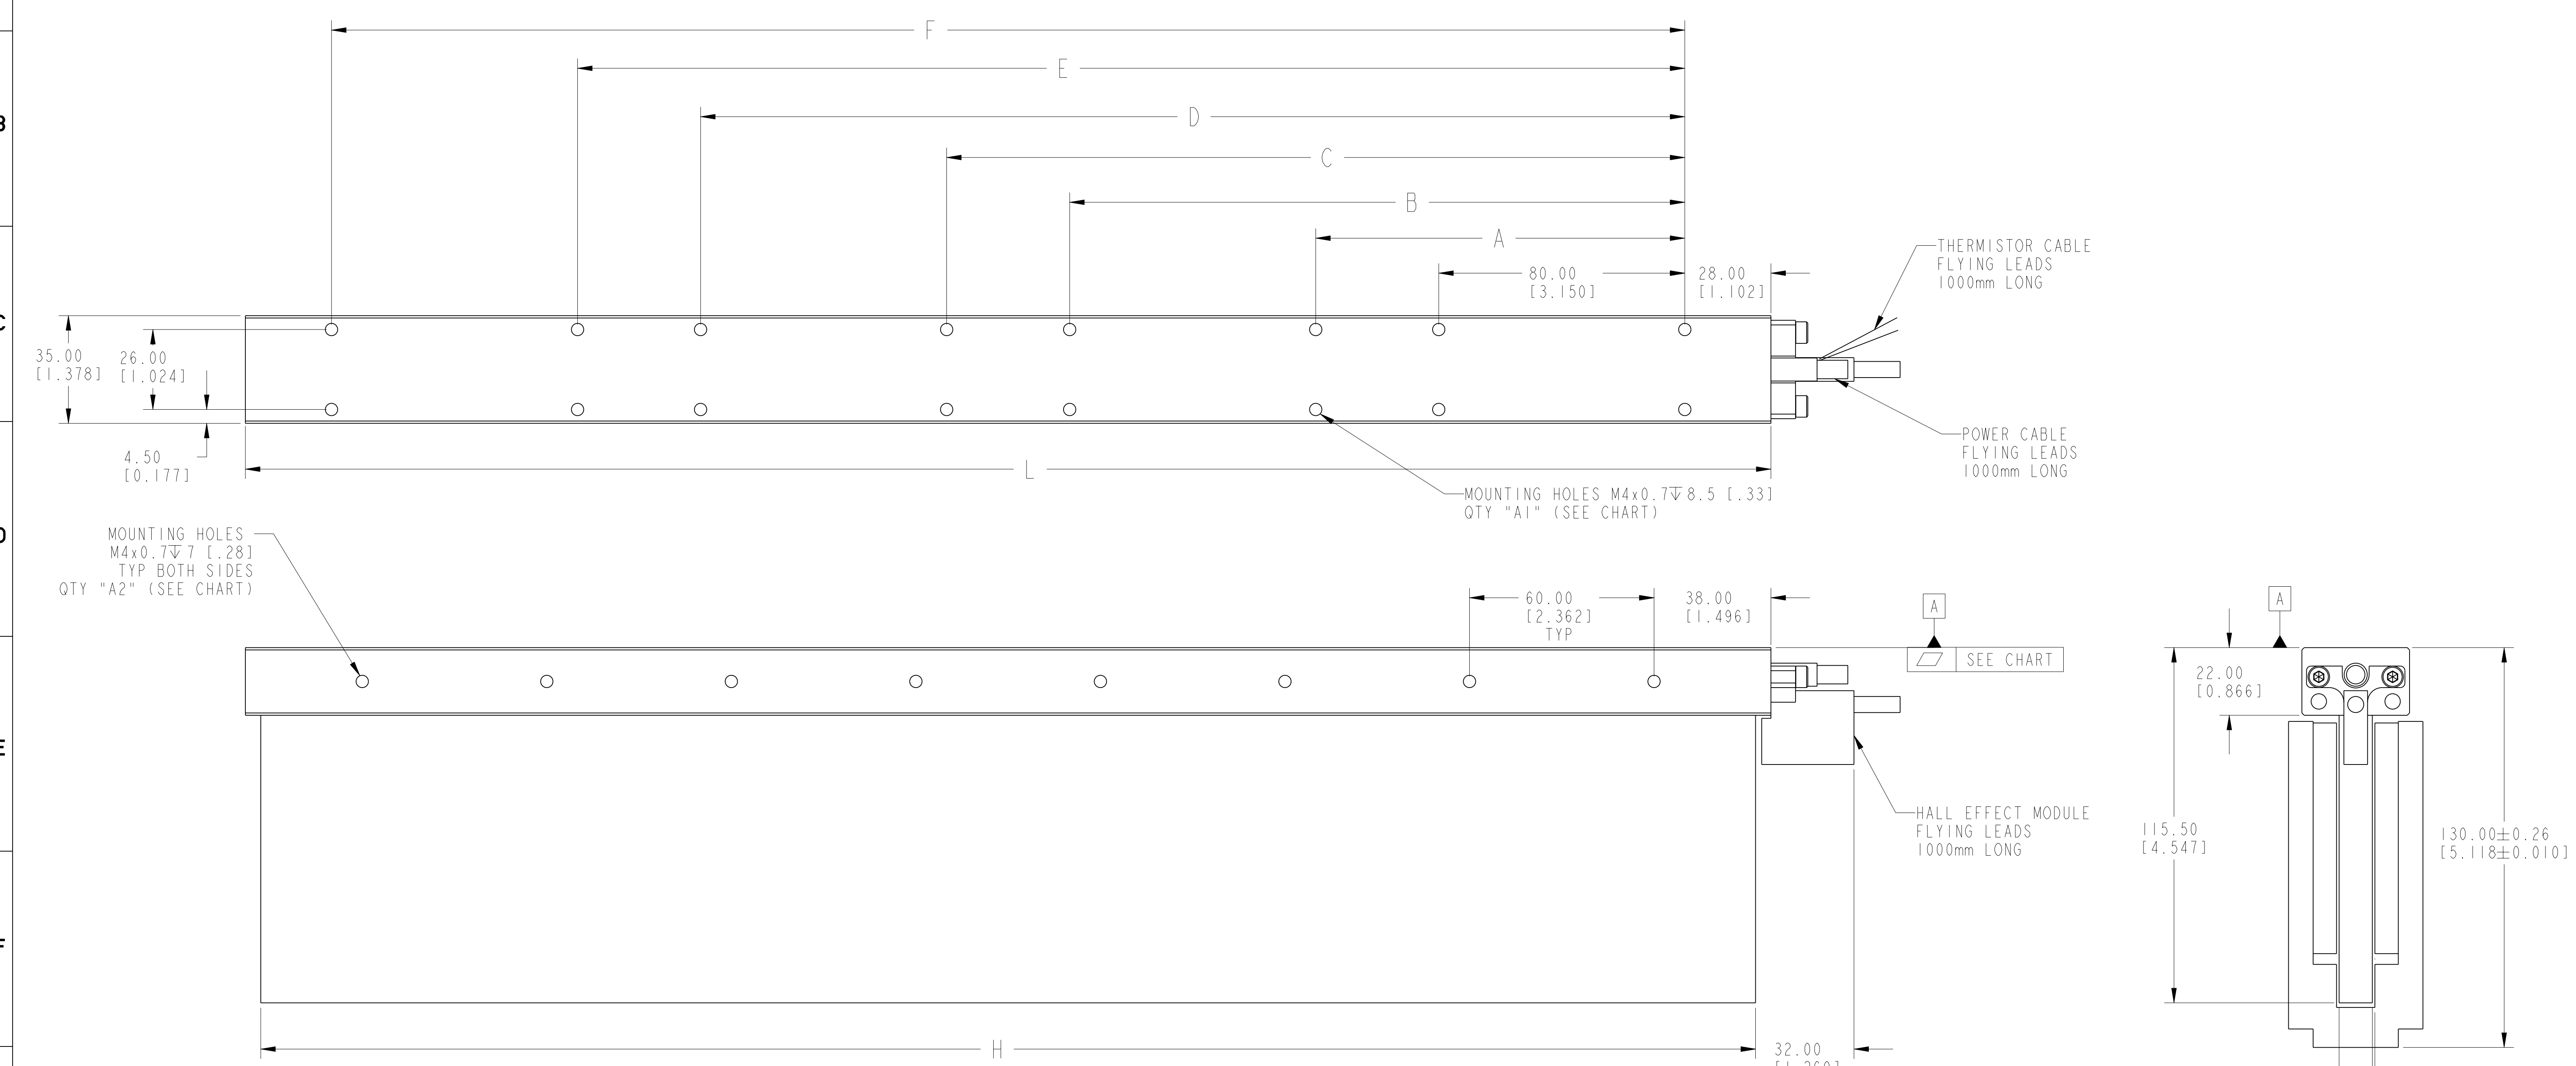

CABLE CODING		
MOTOR POWER LEADS	COLOR	FUNCTION
	RED	∅A [U]
	WHT	∅B [V]
	BLK	∅C [W]
	GRN/YEL	GND

THERMISTOR (PTC)		
	BLK	THERM
	BLK	THERM

CABLE INFORMATION (ALL CABLES ARE NON-FLEX)								
	CABLE	# COND	GA	SHLD TYPE	DIAMETER	STATIC BEND RADIUS		
HALL EFFECT (TRAP)	RED	V+	18	BRAID	∅7.0 [.28]	18.0 [.70]		
	WHT	S1	20		∅6.4 [.25]	17.0 [.67]		
	BLU	S2	26	NONE	∅4.0 [.16]	10.0 [.40]		
	ORN	S3	24	FOIL	∅5.0 [.20]	15.0 [.59]		
	BLK	VRTN	2				THERM	6
	GRN	NC	6					

REFERENCES		LDL-x075xxx-xHT20, ESM MOTOR COIL		CONFIDENTIAL AND PROPRIETARY INFORMATION					
REVISION	DIMENSIONS APPLY BEFORE SURFACE TREATMENT	Rockwell Automation		THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF ROCKWELL AUTOMATION, INC. AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS, EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF ROCKWELL AUTOMATION, INC.					
AUTHORIZATION	TOLERANCES UNLESS OTHERWISE SPECIFIED:								
	0 TO 6mm ±0.1	DR.	FS	DATE	0-04-09	SHEET	1	OF	1
	>6 TO 30mm ±0.2	CHKD.		DATE		DWG. SIZE	D 10000043859		
	>30mm ±0.3	APPD.		DATE					
	ALL RADII ±0.2								
	ANGLES ±1°								