
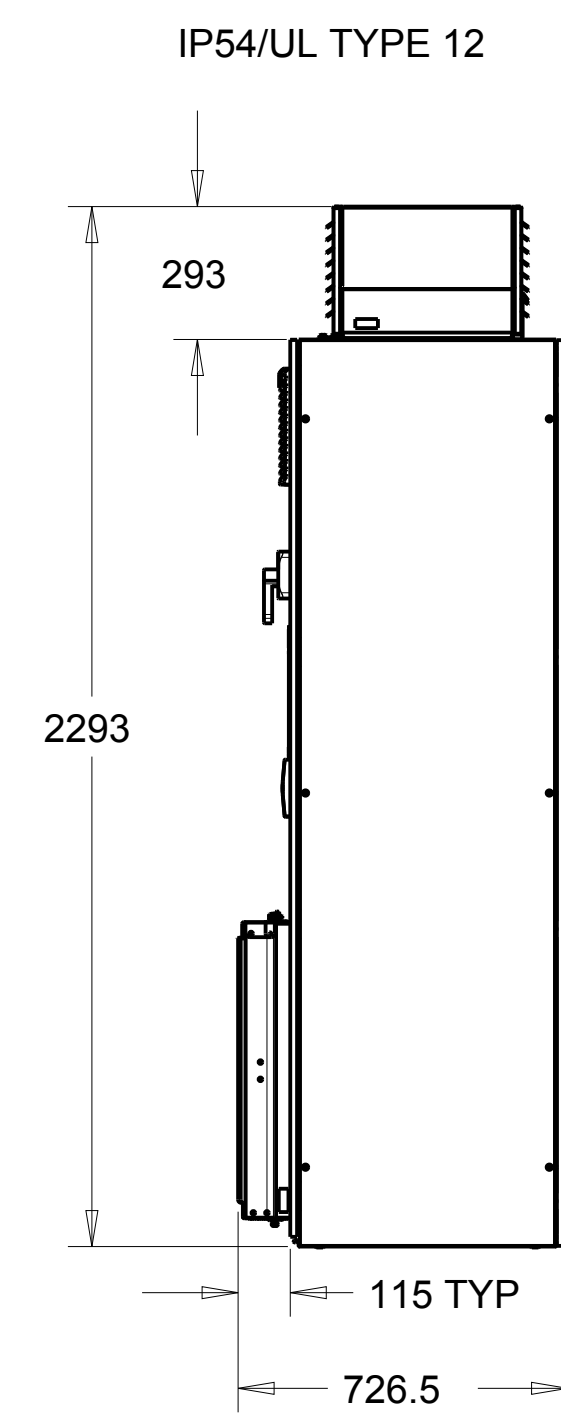
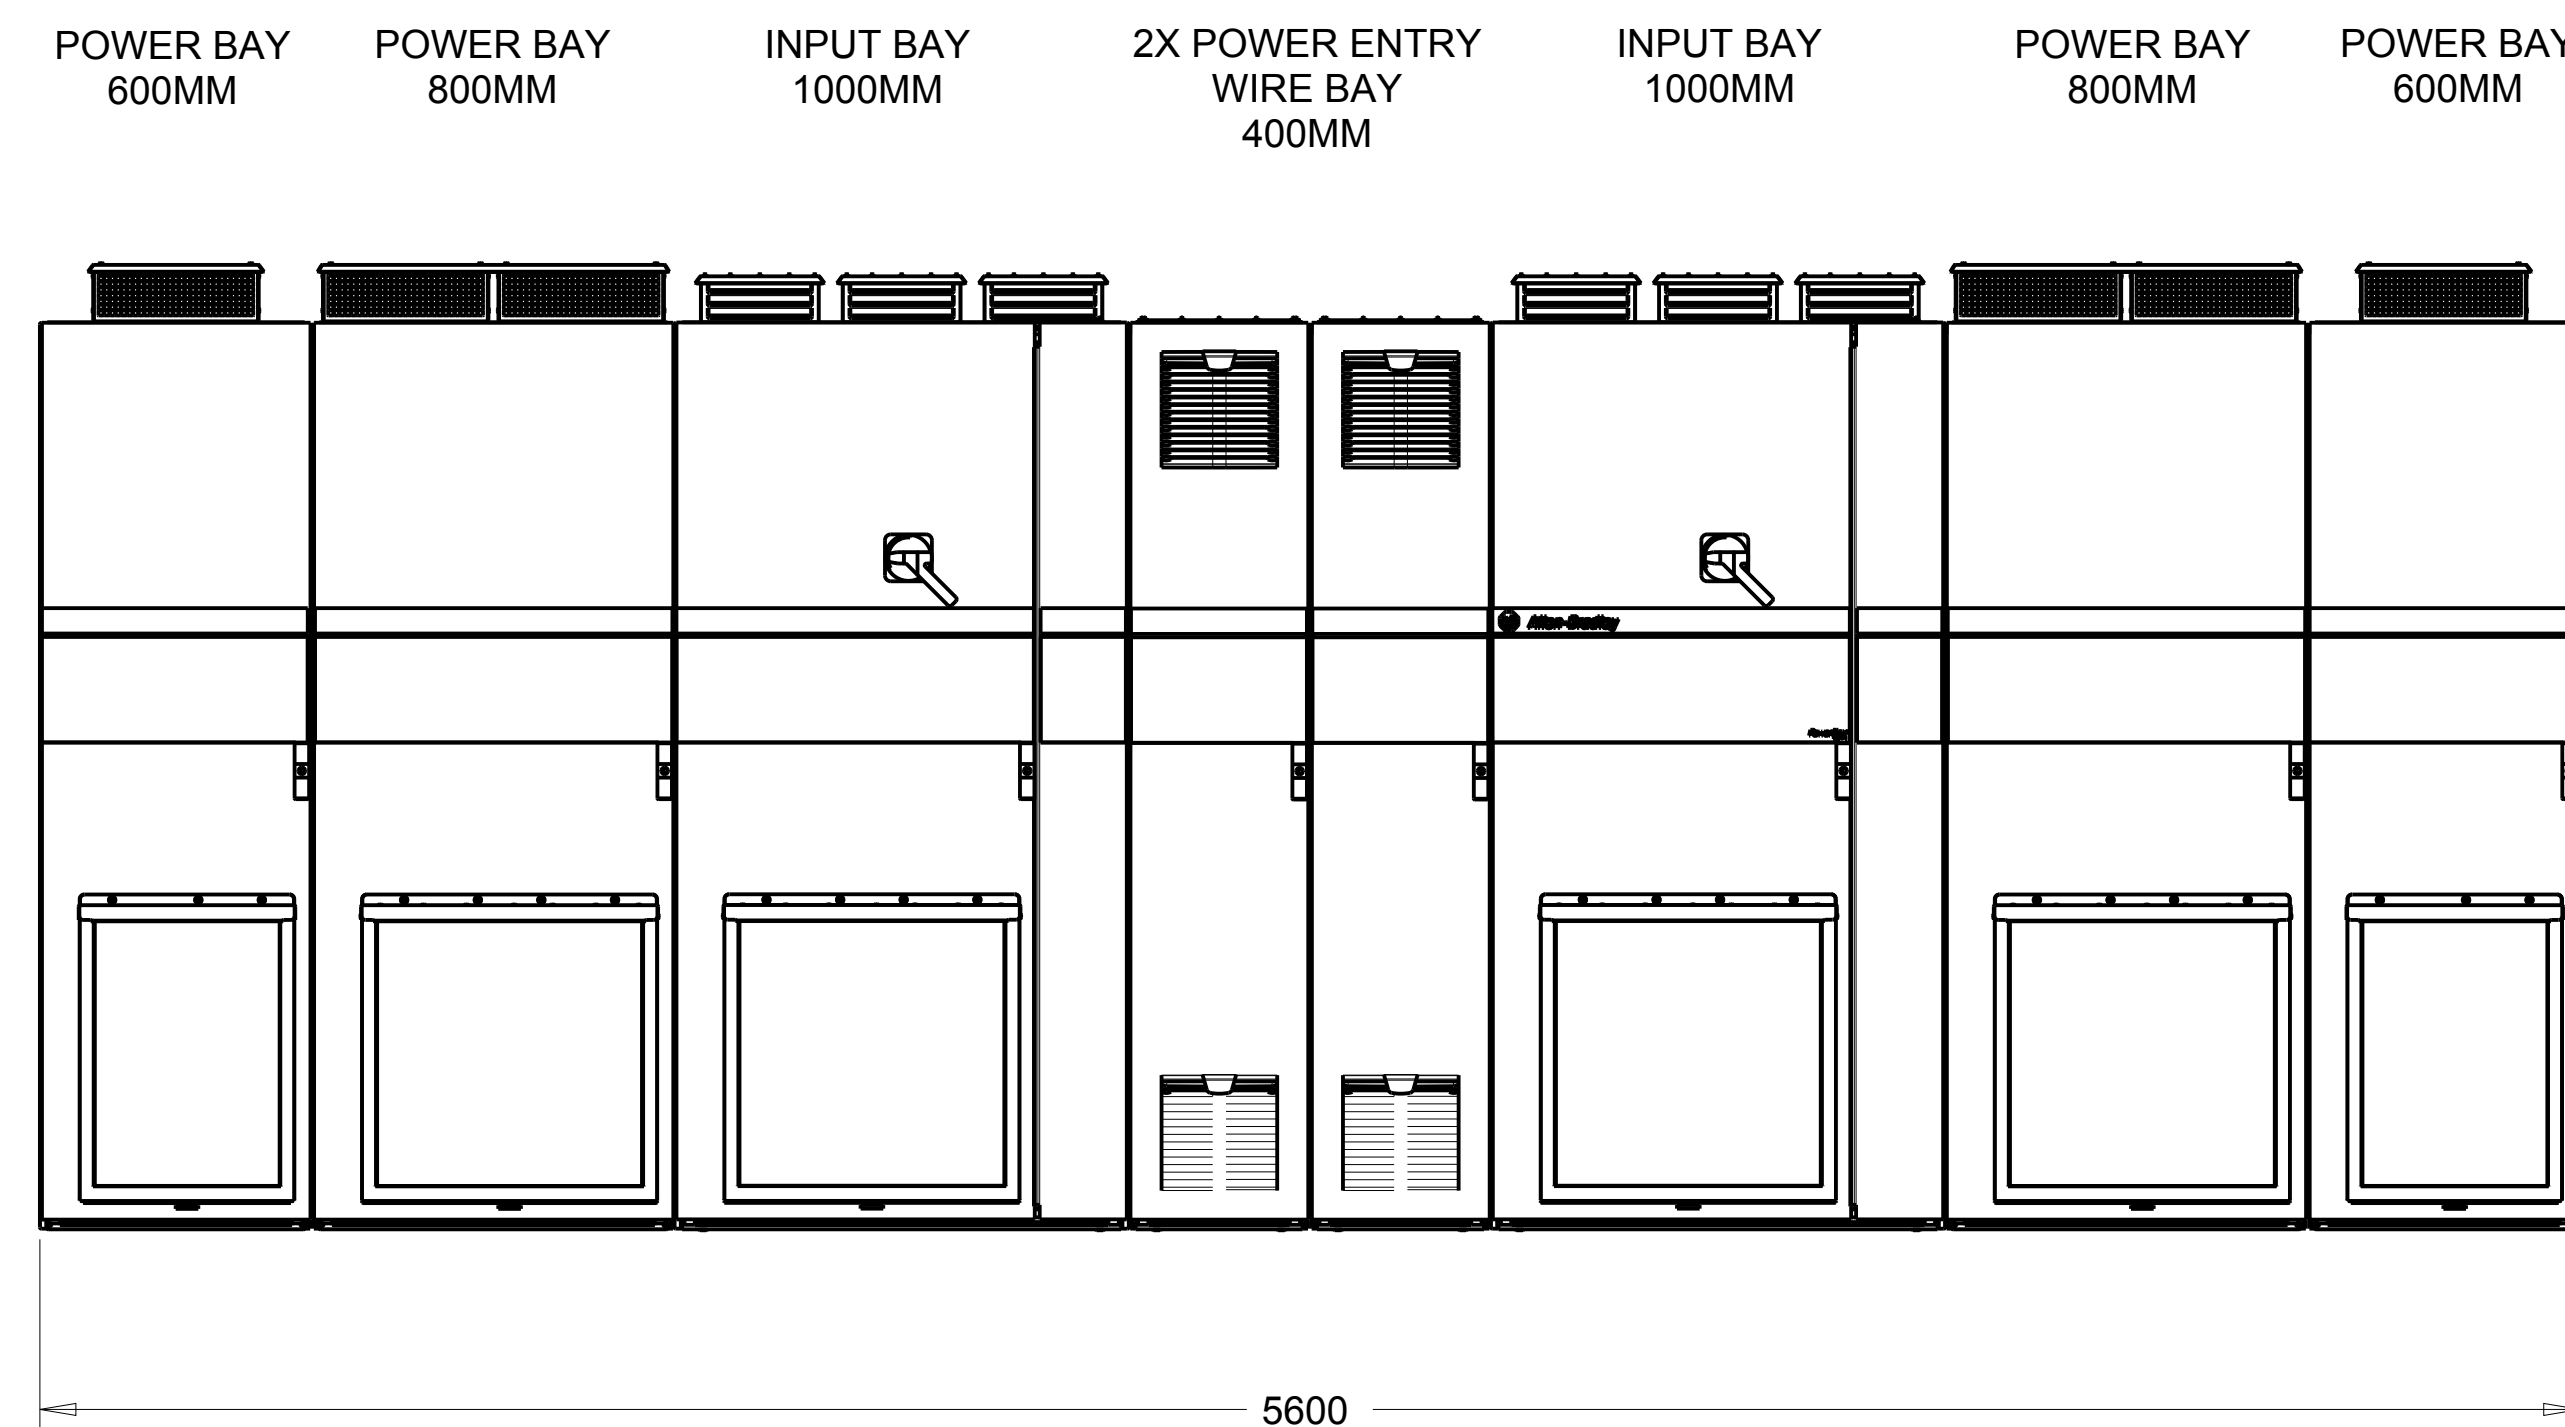


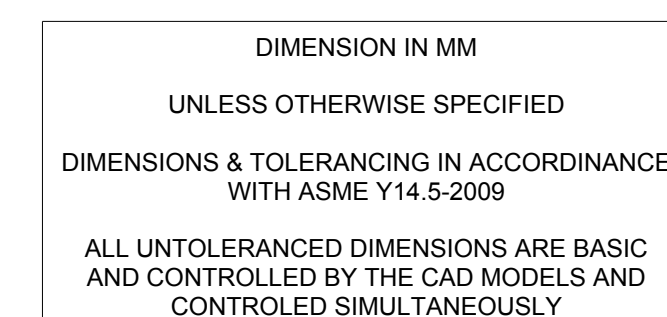

- NOTES:
1. ENCLOSURE SYSTEM IS 2000MM TALL AND 600MM DEEP
 2. PLEASE CHECK ROCKWELLAUTOMATION.LITERATURE.COM FOR ADDITIONAL INFORMATION ON THE POWERFLEX 755T DRIVES.

2. DRIVE SIZE SHOWN:	INPUT VOLTAGE	NORMAL DUTY RATING
	400	1844 kW
	480	2039 kW
	600	1875 kW
	690	1994 kW

**Rockwell
Automation**

DESCRIPTION	PF755TM COMMON BUS SUPPLIES FRAME13 INLINE INSTALLATION SPECIFICATION
-------------	--


Drawn by: MLACHAW	Date: OCT-10-2017
-------------------	-------------------

CONFIDENTIAL AND PROPRIETARY INFORMATION.
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF ROCKWELL AUTOMATION, INC. AND MAY
NOT BE USED, COPIED OR DISCLOSED TO OTHERS, EXCEPT
WITH THE AUTHORIZED WRITTEN PERMISSION OF ROCKWELL
AUTOMATION, INC.

Sheet 1 Of 2

Size	DIR
D	10003449684

Ver
00

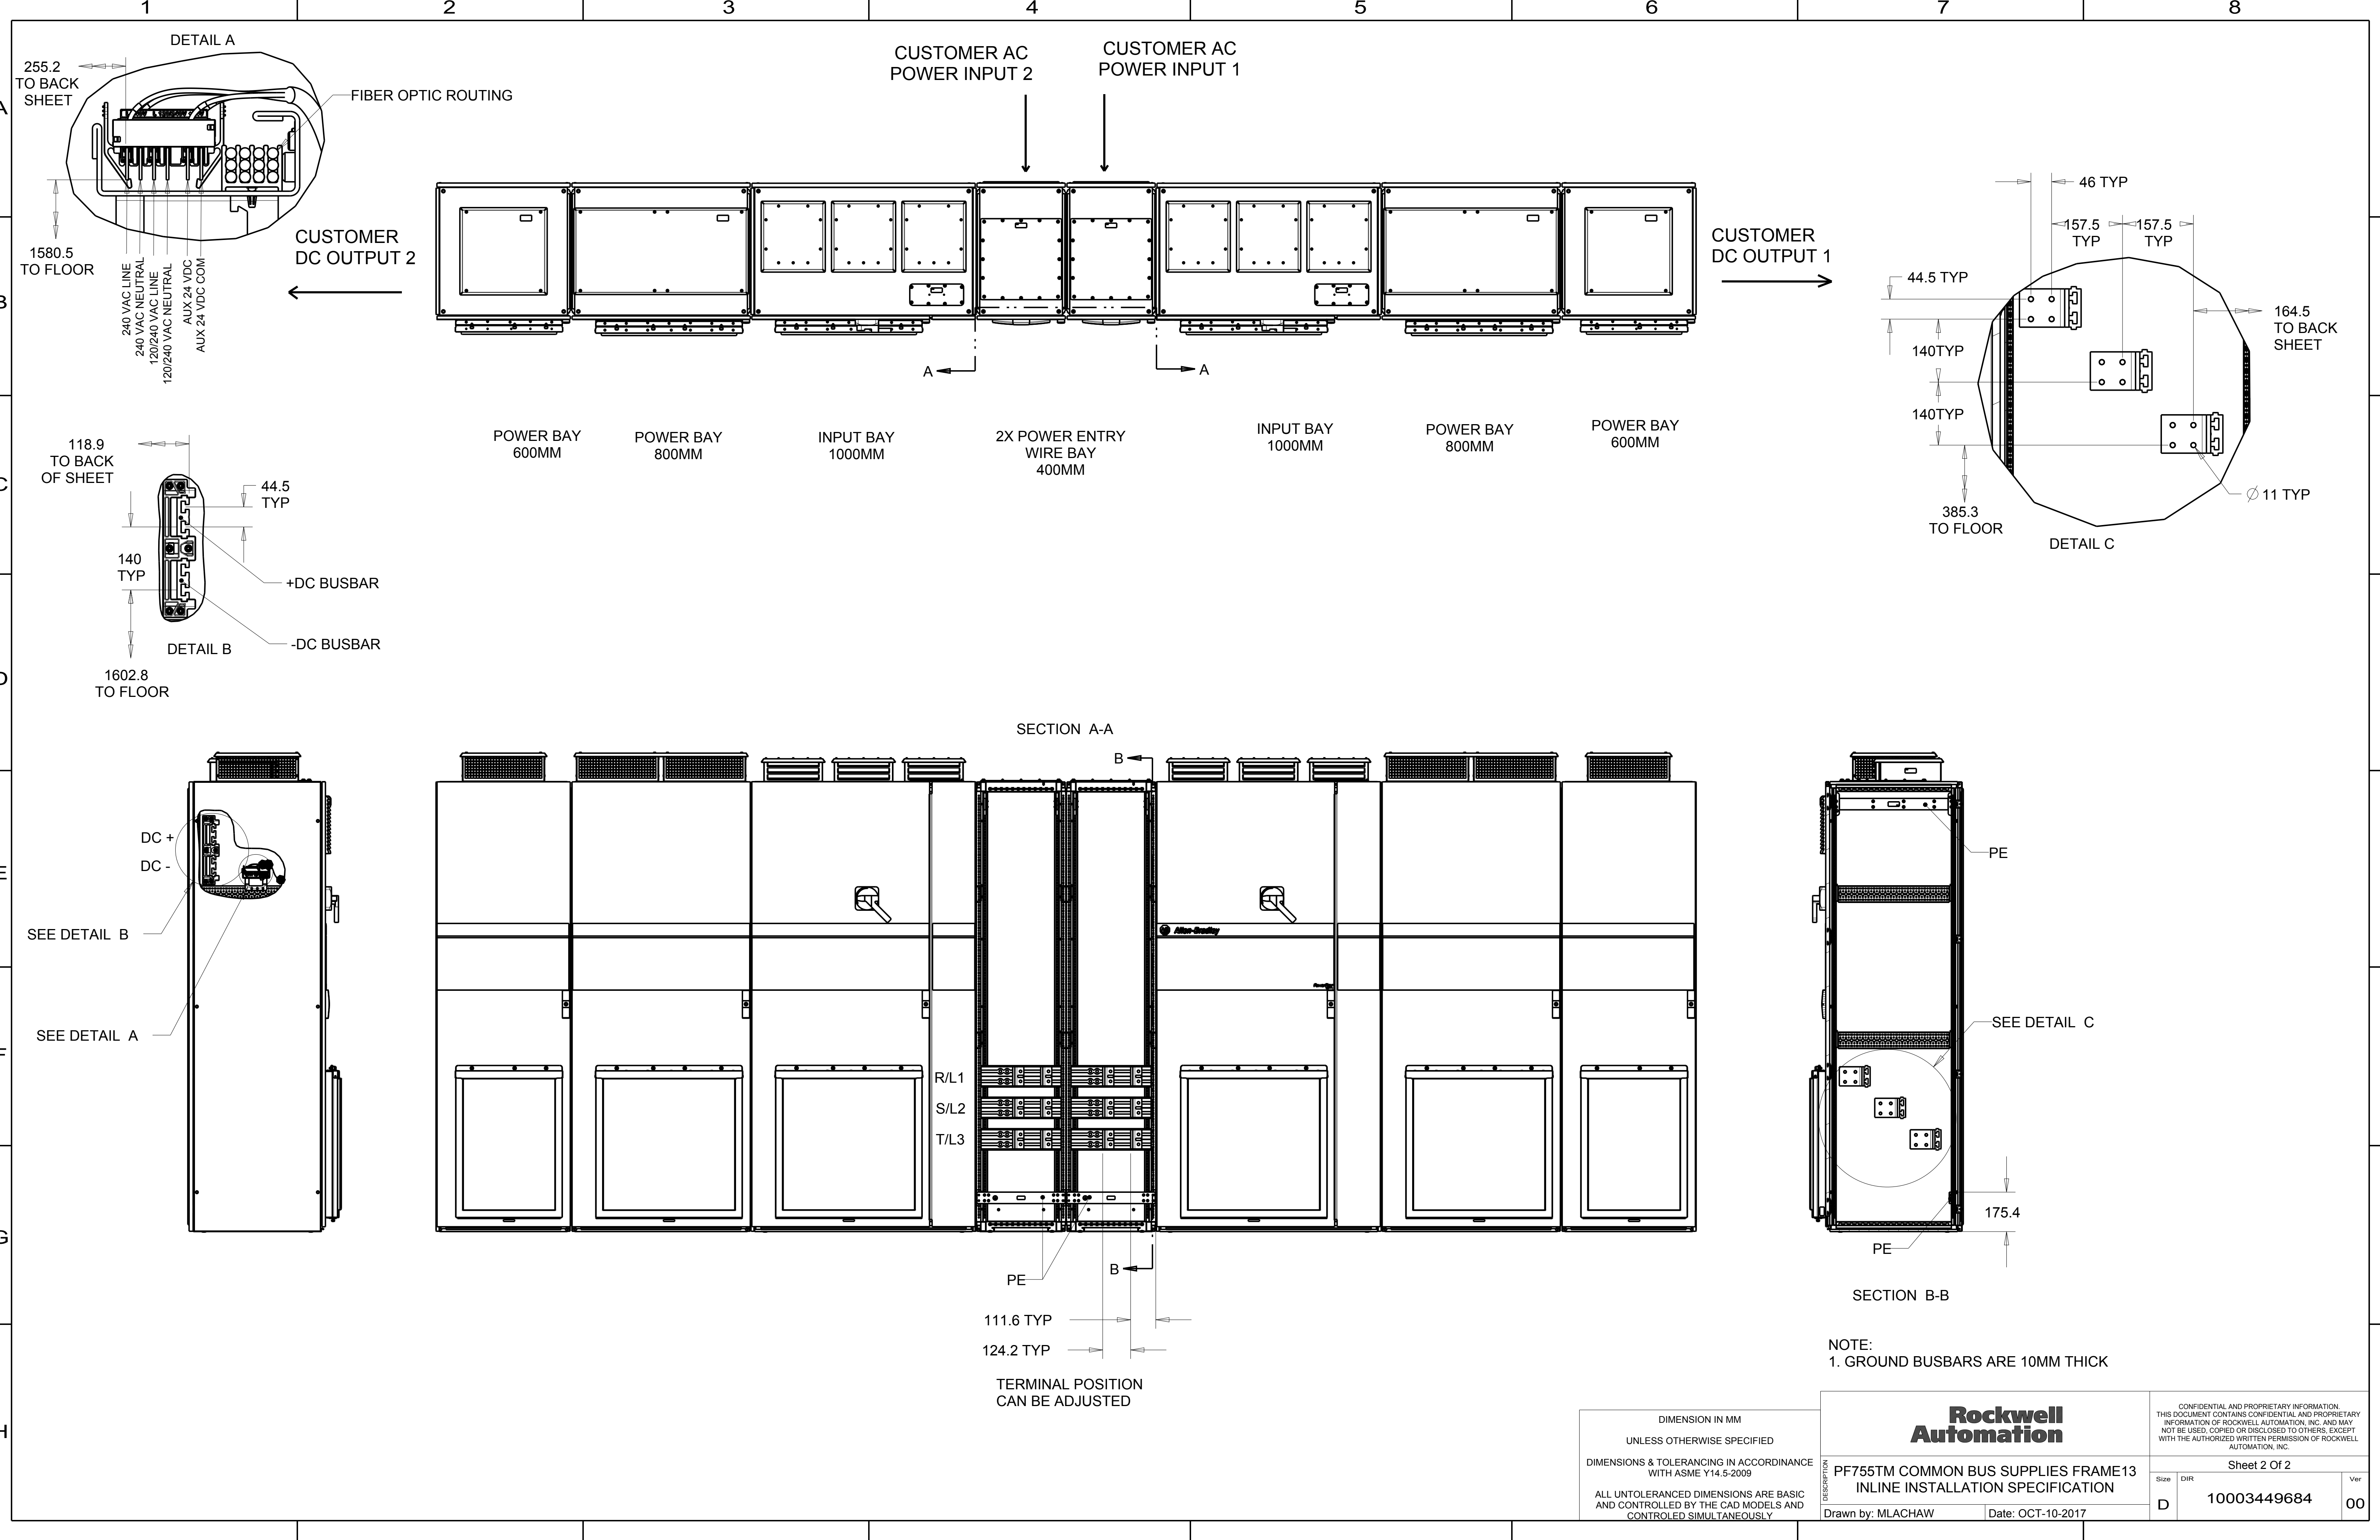

DIMENSION IN MM
UNLESS OTHERWISE SPECIFIED
DIMENSIONS & TOLERANCING IN ACCORDANCE
WITH ASME Y14.5-2009
ALL UNTOLERANCED DIMENSIONS ARE BASIC
AND CONTROLLED BY THE CAD MODELS AND
CONTROLLED SIMULTANEOUSLY

Rockwell Automation		CONFIDENTIAL AND PROPRIETARY INFORMATION. THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF ROCKWELL AUTOMATION, INC. AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS, EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF ROCKWELL AUTOMATION, INC.	
PF755TM COMMON BUS SUPPLIES FRAME13 INLINE INSTALLATION SPECIFICATION		Sheet 2 Of 2	
Drawn by: MLACHAW	Date: OCT-10-2017	Size D	Ver 10003449684 00