| RIGHT ANGLE FEMALE END VIEW | RIGHT ANGLE MALE END VIEW |
|---|---|
| 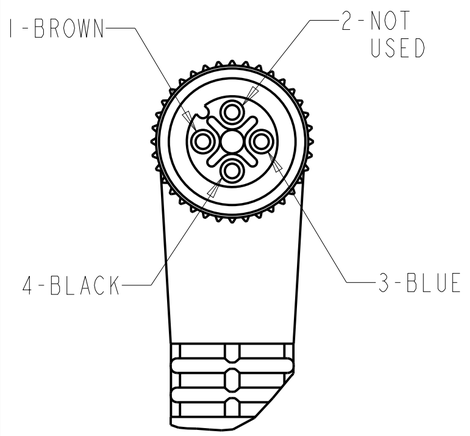 | 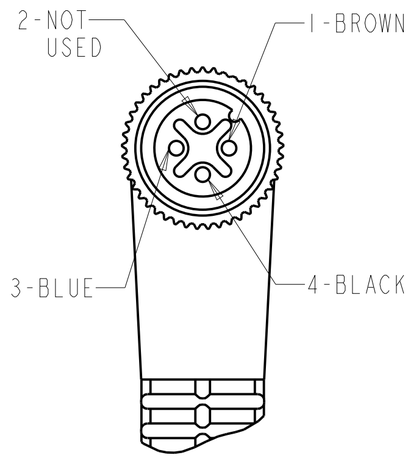 |
| 3-PIN, M12<br>RIGHT ANGLE FEMALE CONNECTOR | 3-PIN, M12<br>RIGHT ANGLE MALE CONNECTOR |





## SPECIFICATIONS

| | |
|---|---|
| CERTIFICATIONS | UL RECOGNIZED AND CSA CERTIFIED |
| COUPLING NUT MATERIAL | EPOXY-COATED ZINC |
| CONNECTOR OVERMOLD MATERIAL | OIL RESISTANT PUR |
| CONTACT PLATING | GOLD OR GOLD FLASH OVER PALLADIUM-NICKEL |
| CONTACT MATERIAL | BRASS OR COPPER ALLOY |
| CABLE TYPE | PVC, 18AWG, 300V |
| CABLE JACKET COLOR | YELLOW |
| BEND RADIUS | 10 X DIAMETER |
| NUMBER OF CONDUCTORS [AWG] | 3x18 AWG |
| SHIELDING | UNSHIELDED |
| CABLE RATING | UL AWM STYLE 20866 VW-1 80C 300V, CSA AWM A/B I/II 80C 300V FTI, UV OIL AND WATER RESISTANT |
| INGRESS PROTECTION | NEMA 6P, 1200 PSI (8270 kPa) WASHDOWN, IP69K |
| TEMPERATURE RATING | -20°... +80°C (-4°... +176°F) |

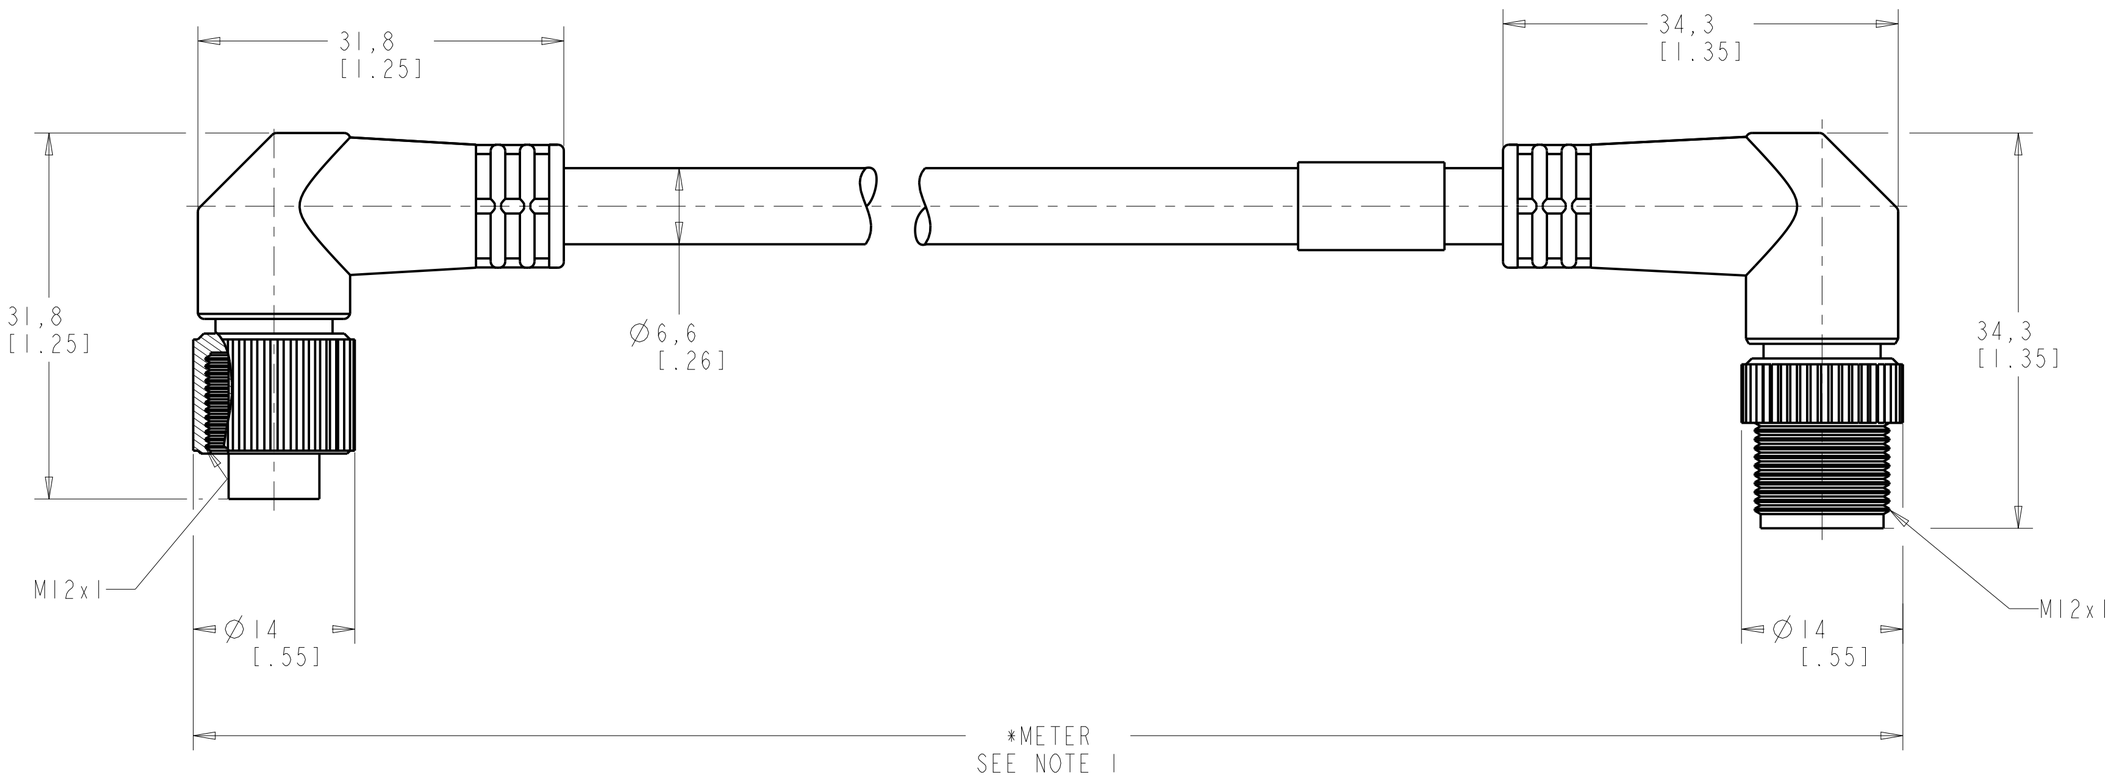



DIMENSIONS & INFORMATION SHOWN ARE FOR REFERENCE ONLY AND FOR LATEST UPDATE PLEASE REFER http://www.ab.com/catalogs/

NOTES:
1. (*) REPRESENTS THE CABLE LENGTH IN METERS.
2. ALL DIMENSIONS ARE IN MM [INCHES] UNLESS AND OTHERWISE SPECIFIED.

Rockwell Automation

CONFIDENTIAL AND PROPRIETARY INFORMATION.
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF ROCKWELL AUTOMATION, INC. AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS, EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF ROCKWELL AUTOMATION, INC.

889D-R3UEDE-*

Drawn by: LNT | Date: 11/14/2013

Sheet 1 Of 1

| Size | | Ver |
|---|---|---|
| C | 889D-R3UEDE-* | 0.0 |