RIGHT ANGLE FEMALE END VIEW




3-PIN, 7/8-16UN 2B
RIGHT ANGLE FEMALE CONNECTOR

## SPECIFICATIONS

| | |
|---|---|
| CERTIFICATIONS | UL RECOGNIZED AND CSA CERTIFIED |
| COUPLING NUT MATERIAL | EPOXY-COATED ZINC |
| CONNECTOR OVERMOLD MATERIAL | OIL RESISTANT TPE |
| CONTACT PLATING | GOLD OR GOLD FLASH OVER PALLADIUM-NICKEL |
| CONTACT MATERIAL | BRASS OR COPPER ALLOY |
| CABLE TYPE | CPE, 16AWG, 600V |
| CABLE JACKET COLOR | YELLOW |
| BEND RADIUS | 10 X DIAMETER |
| NUMBER OF CONDUCTORS [AWG] | 3x16 AWG |
| SHIELDING | UNSHIELDED |
| CABLE RATING | UL S00W 105C 600V WATER RESISTANT, CSA -50C FT-1 600V |
| INGRESS PROTECTION | NEMA 4, 6P, 12, 13; IP67; 1200 PSI WASHDOWN, IP69K |
| TEMPERATURE RATING | -50°... +105°C (-58°... +221°F) |

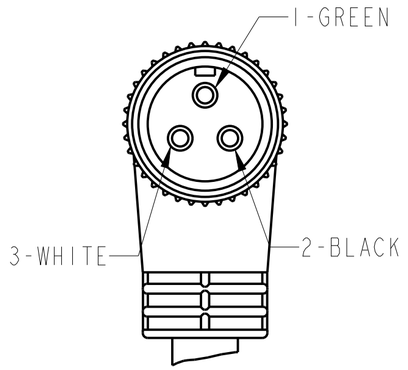


DIMENSIONS & INFORMATION SHOWN ARE FOR REFERENCE ONLY AND FOR LATEST UPDATE PLEASE REFER http://www.ab.com/catalogs/

NOTES:
1. (*) REPRESENTS THE CABLE LENGTH IN METERS.
2. ALL DIMENSIONS ARE IN MM [INCHES] UNLESS AND OTHERWISE SPECIFIED.

Rockwell Automation

CONFIDENTIAL AND PROPRIETARY INFORMATION.
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF ROCKWELL AUTOMATION, INC. AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS, EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF ROCKWELL AUTOMATION, INC.

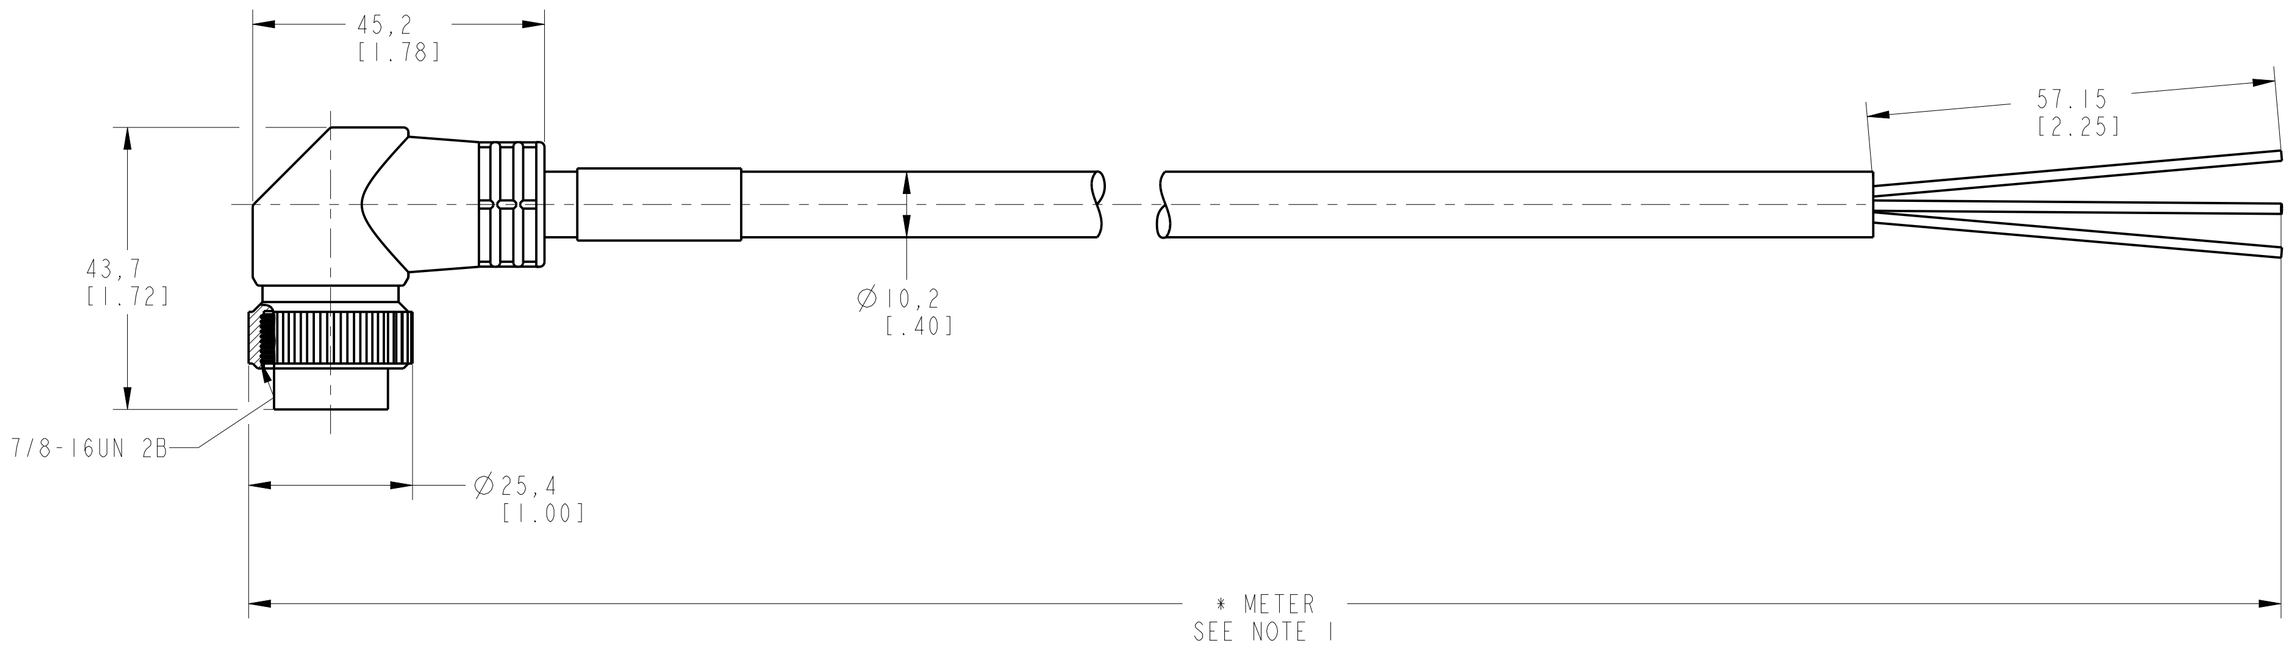889N-R3WFC-*

Sheet 1 Of 1

| Drawn by: LNT | Date: 03/10/2014 | Size: C | 889N-R3WFC-* | Ver: 0.0 |
|---|---|---|---|---|