

	·	Ĺ			$\smile$
А					
, ,					
				MOTOR BLOCK R	EGIONS
В		96	96	96 — ¢ ¦	
С					
				· · · · · · · · · · · · · · · · · · ·	
D		2X 20.2		20.7 — 498.0 —	
E					
		0	0	0	
	3X 22.65 —				
F					
			<b>O</b>	Ø	
G			40.00	0 · 0	52.0
	WITH ROCKWELL ENVIRONMENTAL TION 970-20-01	C 4 9		¢	
Н	PLY WITH R TON ENVIRC				ALL UNDIMENSIONE ARE CONTROLLED MODEL. IN CASE C DISCREPANCY, OVERRID
	MUST COMPLY W AUTOMATION E SPECIFICATI				THIRD ANGLE P
	Letter 1	2	3	4	5



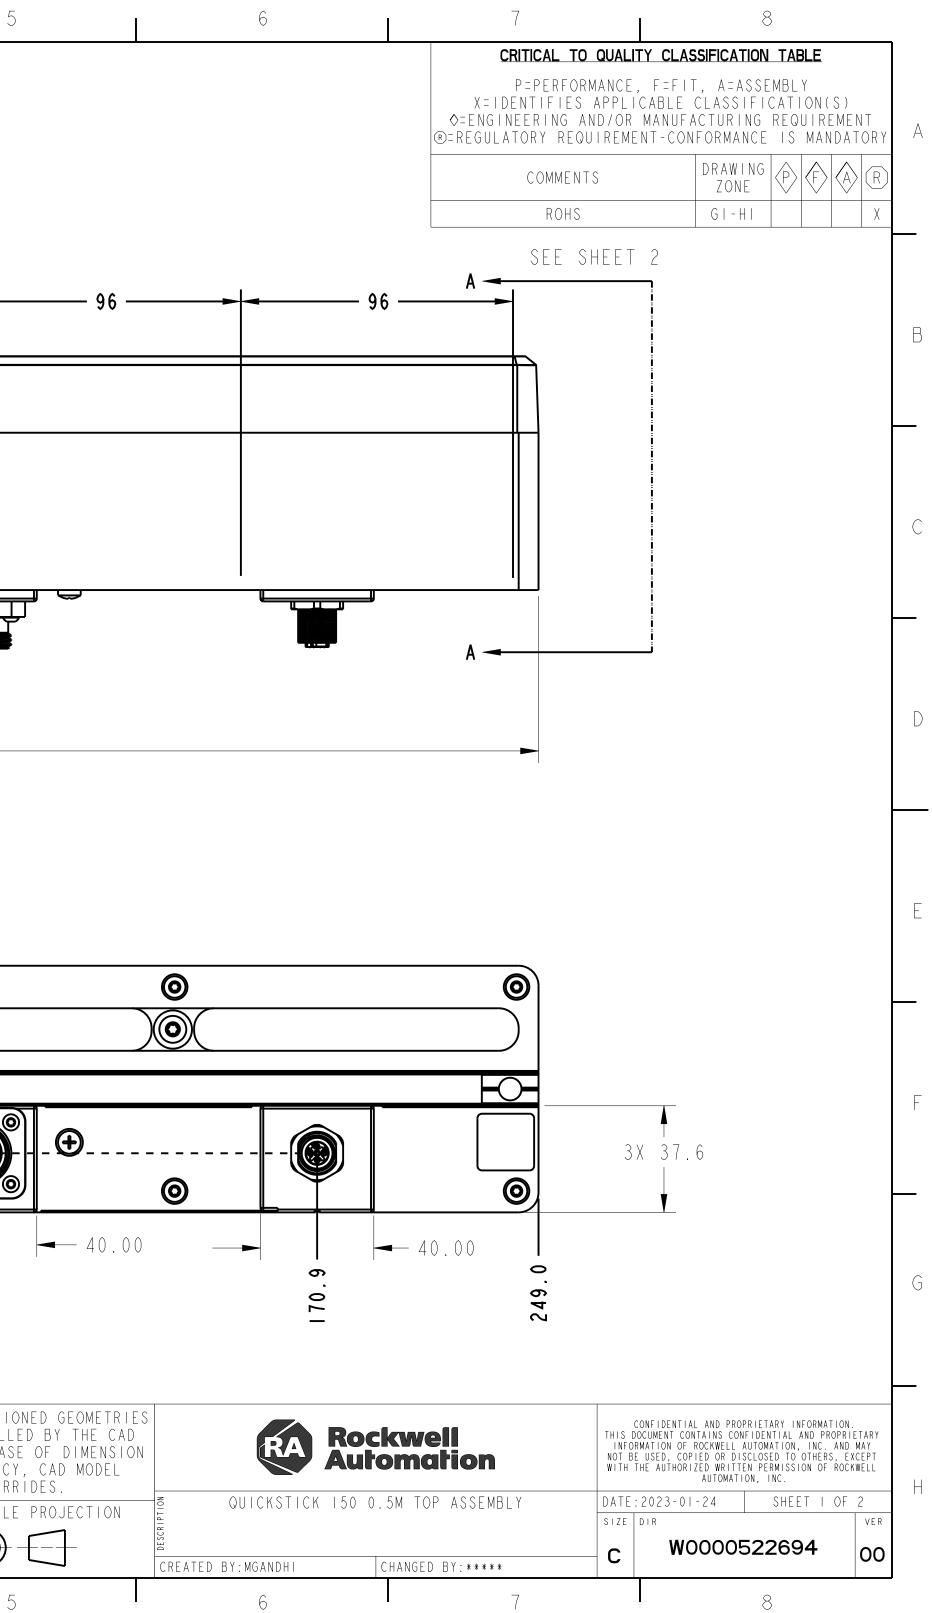

6	7		8			
	CRITICAL TO QUALITY CLASSIFICATION TABLE P=PERFORMANCE, F=FIT, A=ASSEMBLY X=IDENTIFIES APPLICABLE CLASSIFICATION(S) ◇=ENGINEERING AND/OR MANUFACTURING REQUIREMENT ®=REGULATORY REQUIREMENT-CONFORMANCE IS MANDATOR				EMENT	A
	COMMENTS	D	RAWING ZONE			
	ROHS		G   - H		Х	
						В
						С
	—— 87.0 ———					

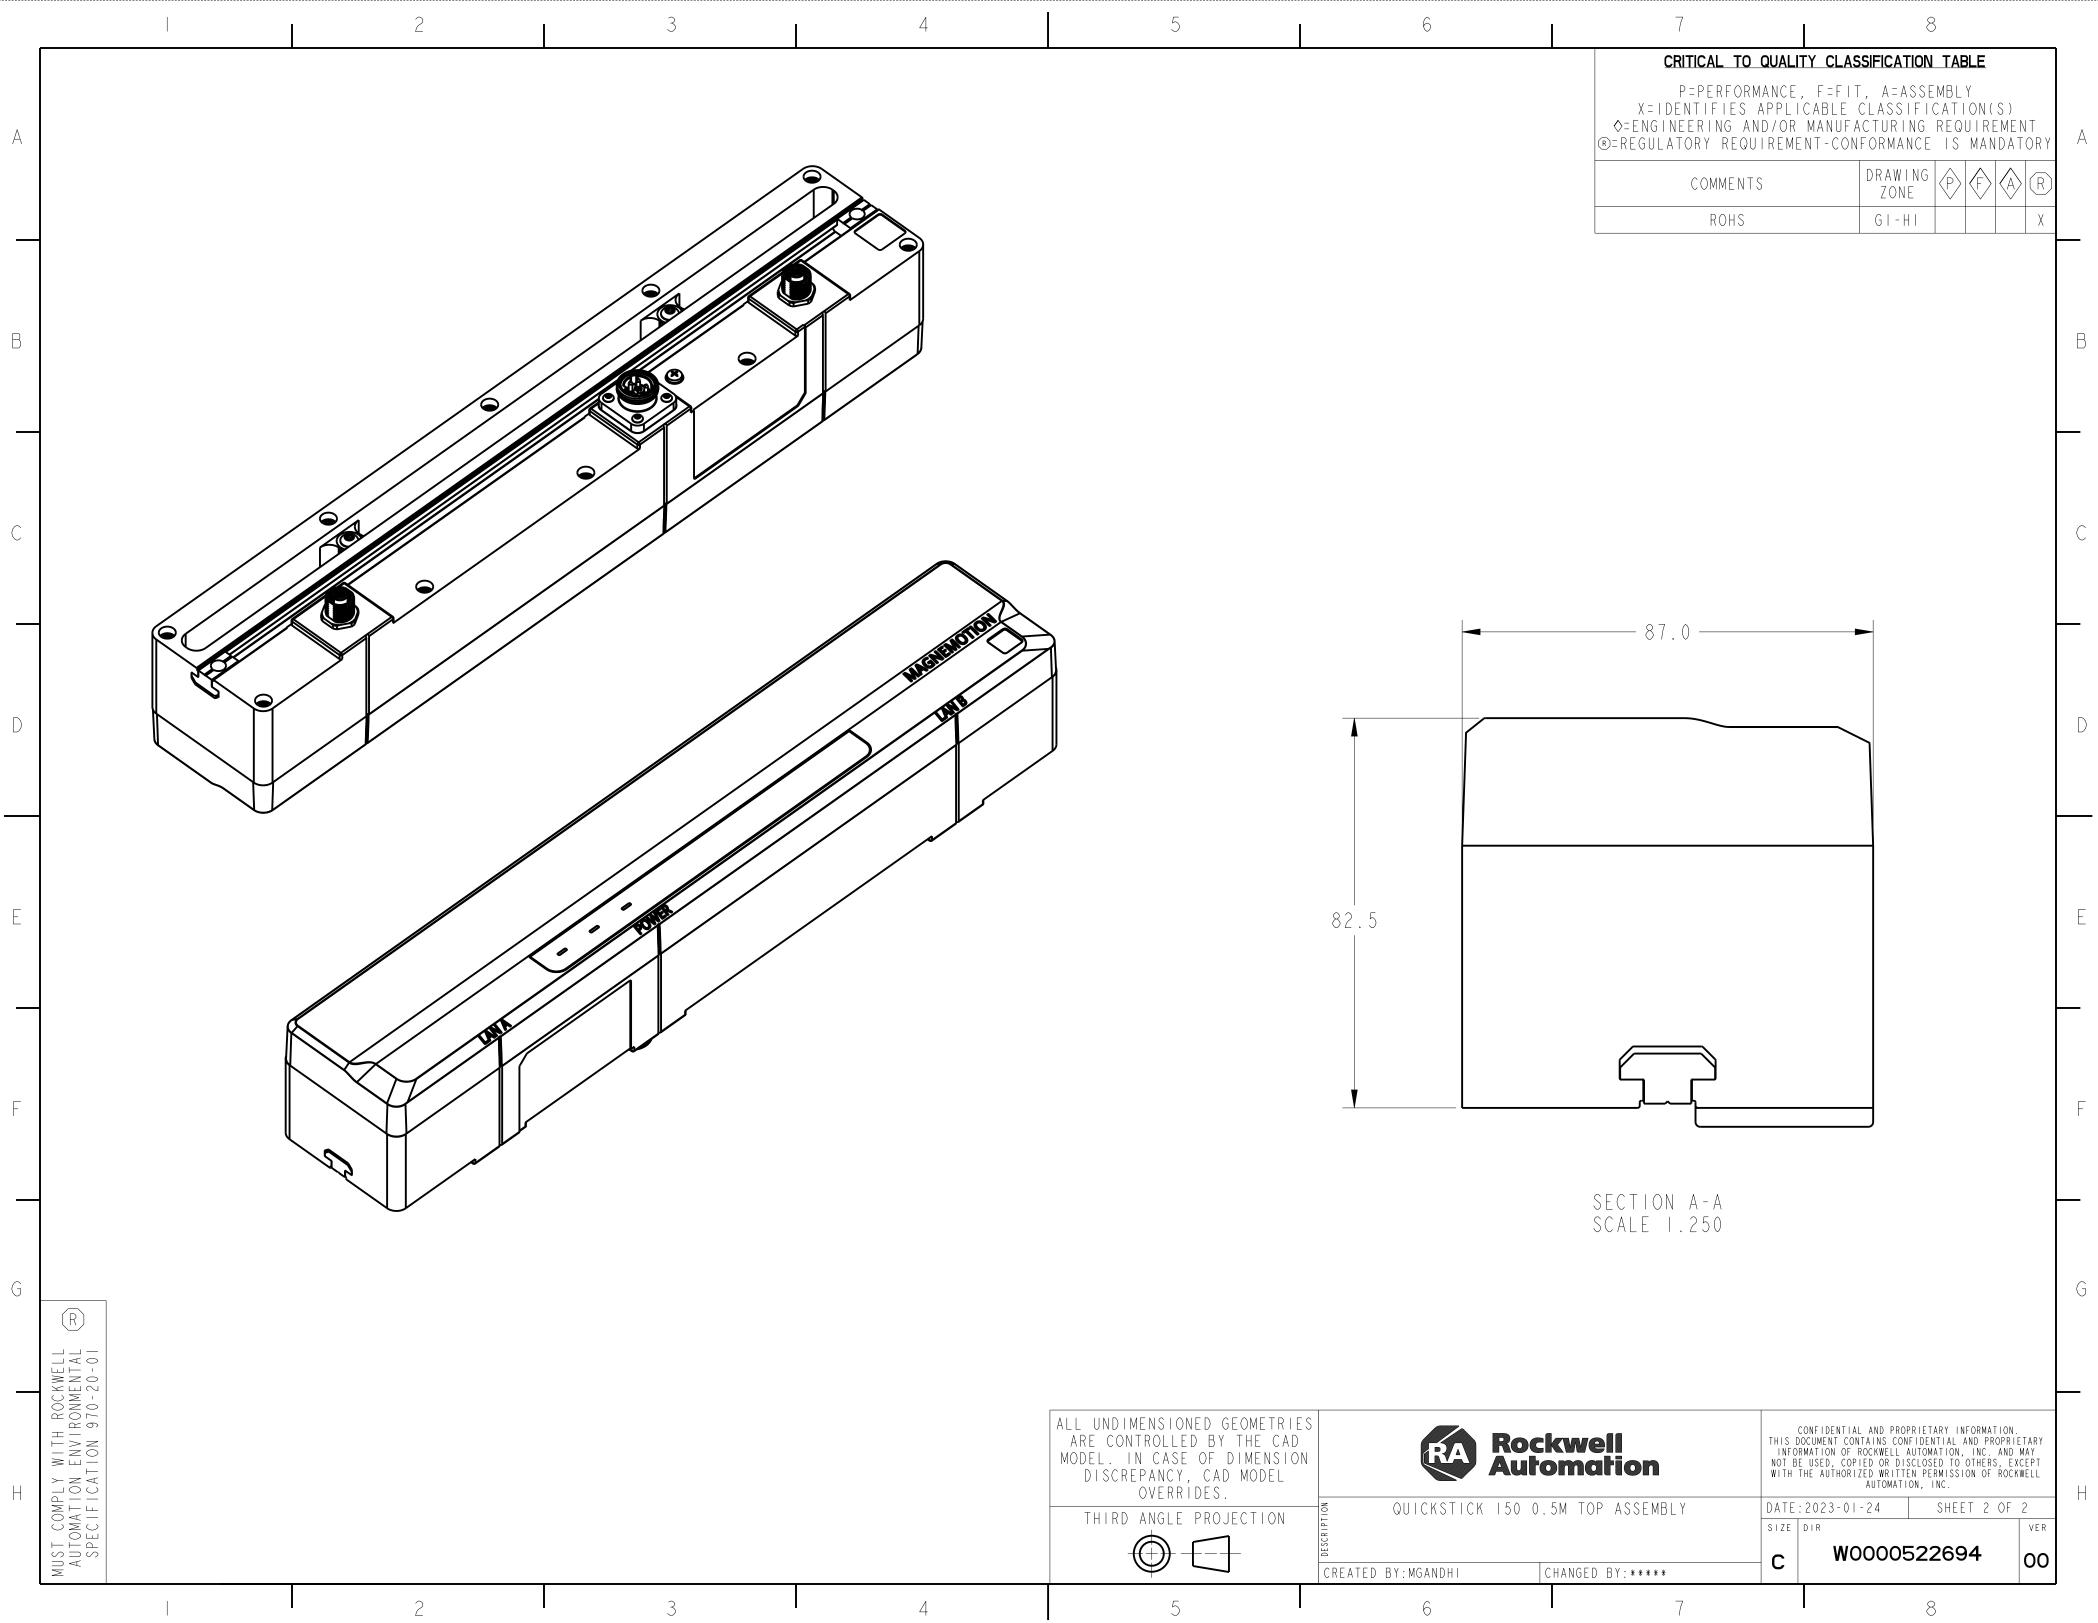